

Titan Wire & Cable Spec Sheet

Type: Roflex®


Robust | Flexible Cable Connection | High Resistance to Abrasion

Applications: For all flexible applications under extreme environmental conditions, because of a very good resistance to UV-rays, ozone and mineral oil.

Ski applications: Derailment Systems, Tower Switches and Remote Control Panels

TWC Part #	Size (mm ² /AWG)	Conductor	Colors
03-PUR-188980	1.0/17	2	Blue/Brown
03-PUR-300759	1.0/17	4	Blue/Brown/Black/YE-GN
03-PUR-219680	1.5/16	12	Black/White #/YE-GN

Cable Construction

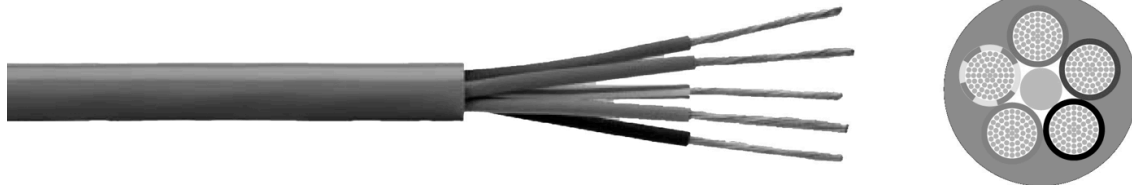

Conductor: Bare fine copper strands according to VDE 0295/ IEC 60228, class 5

Insulation: Cross-linked ethylene-propylene-rubber (EPR)

Jacket: Polyether-polyurethane (PUR)

Color of Jacket: Orange

Temperature Range: -40°C to 90°C

Testing Voltage: 3500V

Titan Wire & Cable – Toll Free: 1-888-356-1662 – Local: 775-356-6600 – Fax: 775-356-6603
www.titanwireandcable.com

*TWC specifications are not manufacturer specific & therefore generic in nature. Construction variations exist & you are encouraged to contact your sales representative with exacting requirements.