



CleaDeep IQV P1 Range Hood Specification Manual

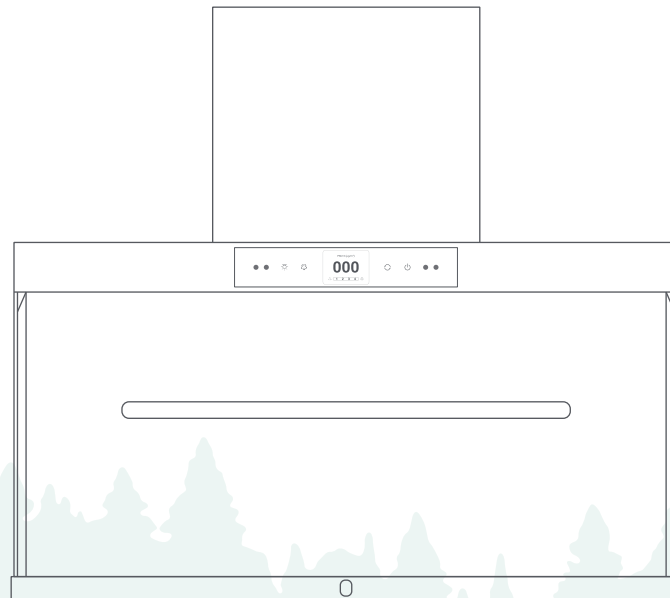

Please read the instructions carefully before use and keep them in a safe place.

Product introduction


Product Part Names

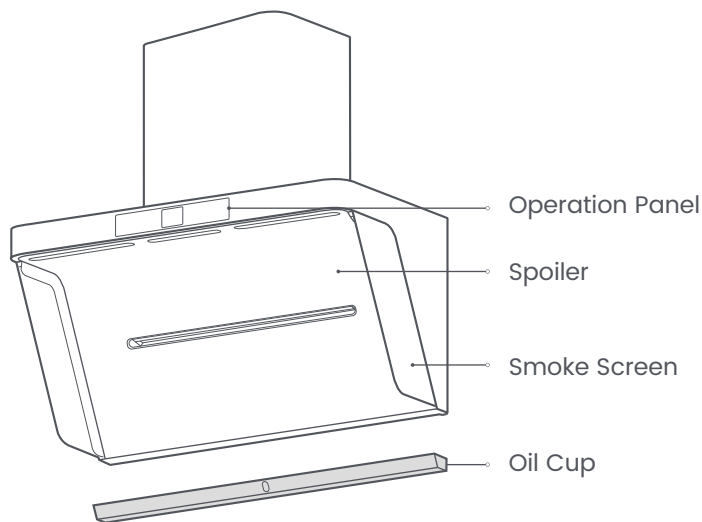

Package Included

Name	Number	Name	Number
Kitchen Hood	1	Self Tapping Screw ST4x8	1
Hanging Plate	1	Self Tapping Screw M4x20	4
Outlet Duct 150	1	Self Tapping Screw ST4x12	2
Oil Cup	1	Aluminium Foil Tape 60x1400	2
Air Vent	1	Expansion Tube 10x50	4
Smoke Screen	2	Wood Screw ST5x50	4
An Instruction Manual	1		

Electrical Schematic Diagram

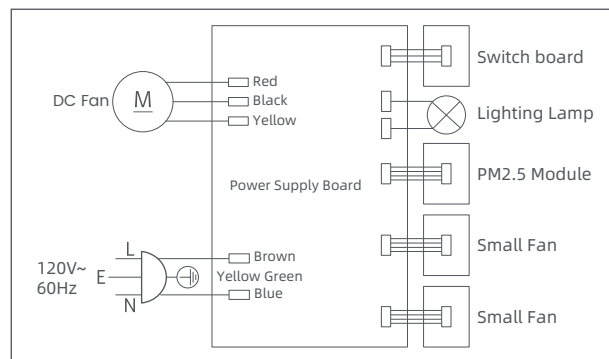

Basic Parameters

Product Name	CleaDeep IQV P1 Range Hood
Model	CYRH90-P1/CYRH90-P1-B
Product Size	35.51" x 18.11" x 38.46"
Net Weight	27 kg
Rated Voltage	120V~
Rated Frequency	60HZ
Rated Input Power (Total)	253W (including lighting)
Main Motor Power	250W
Replaceable Light Power	3W
Motor Type	BLDC (Brushless Direct Current) Motor
Surface Coating	High-Temperature Resistant Paint Coating
Air Volume	11 m ³ /min
Noise Level (Norma)	< 72 dB(A)
Noise Level (High Mode)	71 dB(A)
Air Duct Structure	Double-Layer Sealed Air Duct Structure
Oil Fume Exhaust Method	Ducted Exhaust - Discharges via pipeline to the outside
Time-Delayed Shutdown	3 Minutes
Plug Type	Standard U.S. 3-Prong Plug (NEMA 5-15P), Grounded
Power Cable Specification	60227 IEC 53RV 300/500V, 3 x 0.75 mm ²
Power Cable Length	59 "(1.5 m)
Package Dimensions	1050 x 1000 x 538 mm/41.34" x 39.37" x 21.18"

Note:

1. in the "stir-frying block mode, the maximum air volume can be up to 13 m³/min;
2. Air volume, air pressure(static pressure at the specified air volumelmaximum static pressure: the allowable difference between the measuredvalue and the express value does not exceed -10% of the express value,.
3. The noise shownis A sound pressurelevel which is A sound pressure levelnoise minus 14 decibels.