

## Features & Benefits


- High energy density and voltage
- Long, stable power with a flat discharge voltage
- Ideal for portable communications, portable computing, and robotics.

## Specifications


Rated capacity <sup>(1)</sup>	Min. 2680mAh
Nominal capacity <sup>(2)</sup>	Min. 2730mAh Typ. 2880mAh
Nominal voltage	3.6V
Charging	CC-CV, Std. 1365mA, 4.2V, 4.0 hrs
Weight (max.)	46.5g
Temperature	Charge: +10 to +45° C Discharge: -20 to +60° C Storage: -20 to +50° C
Energy density	Volumetric: 565 Wh/l Gravimetric: 213 Wh/kg

<sup>(1)</sup>At 20° C <sup>(2)</sup>At 25° C


## Dimensions

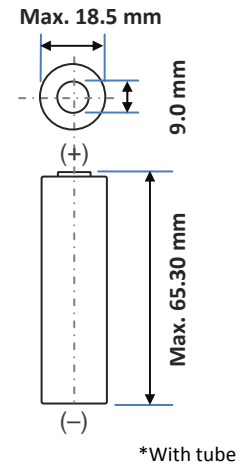


## Charge Characteristics

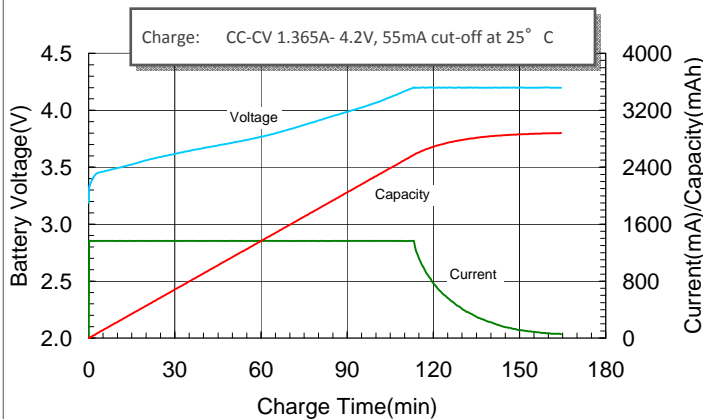


## Cycle Life Characteristics

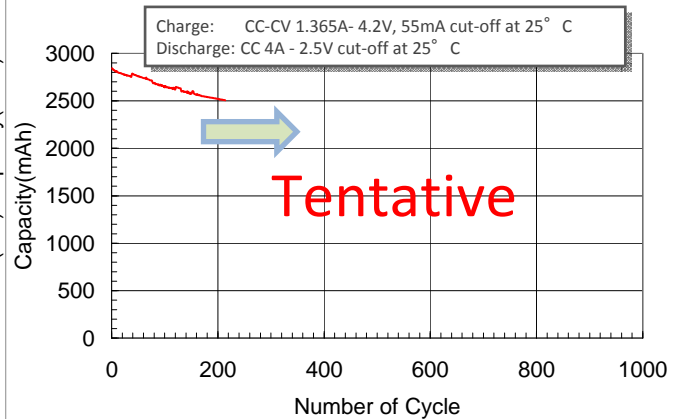

## Discharge Characteristics (by temperature)

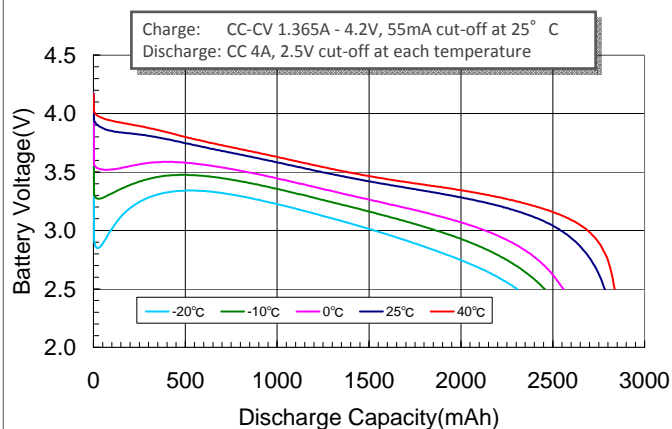

## Discharge Characteristics (by rate of discharge)

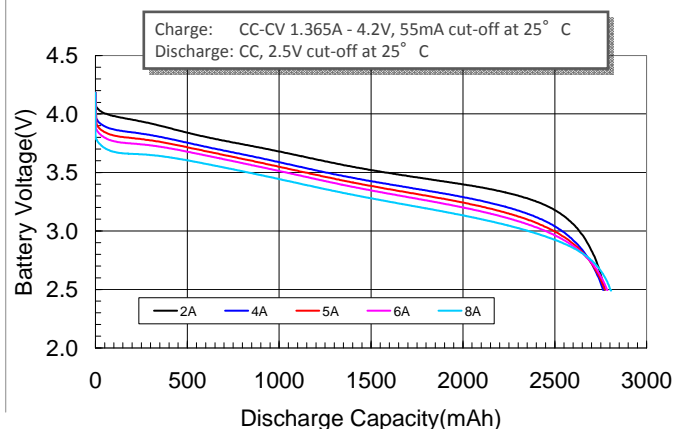

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.