


PROFI AMX



The **PROFI** model for reliable washing of glasses and dishes.

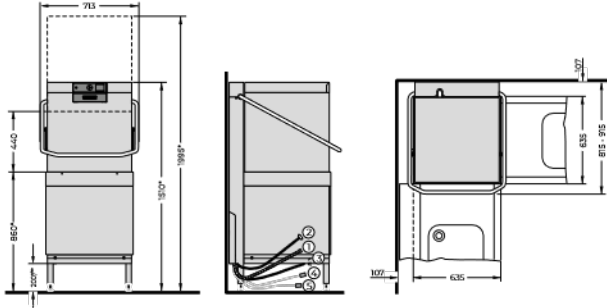

| CONNECTIONS | |
|-------------------------------|----------------------------------|
| ① Drain hose | 2,000 mm ID 20 / OD 25 |
| ② Supply hose | 2,000 mm R 3/4" |
| Required flow rate | 5 l/min |
| Flow pressure | 0.5 (0.8 with softener) - 10 bar |
| Max. supply water temperature | 60 °C |
| ③ Power cord | 2,500 mm |
| Supply hose for | |
| ④ Detergent | 2,000 mm |
| ⑤ Rinse aid | 2,000 mm |

| TECHNICAL DATA | |
|-------------------|---------------------------------------|
| Cycle times* | 60 / 90 / 180 sec. and special cycles |
| Water consumption | 2 l/rack |
| Tank capacity | 23 l |
| Tank heating | 2.5 kW |
| Power supply | 400 / 50 / 3N |

| BOOSTER LOADING | |
|-----------------|--------|
| Standard | 6.2 kW |

| TOTAL LOADING | |
|----------------------|-------------------|
| Standard | 7.1 kW 3 x 16 A |
| Wash pump | 0.7 kW |
| Rack size | 500 x 500 mm |
| Loading height | 440 mm |
| Noise level | 63 dB (A) |
| Weight (gross / net) | 130 / 110 kg |

* Thermostop guarantees required temperatures with cold water, the actual cycle times extend accordingly. For corner operation we recommend to make the right side of the machine accessible for service. For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or a HOBART HYDROLINE water treatment system.

PRODUCT ADVANTAGES

- **VISIOTRONIC-TOUCH control:** colour touchscreen (displays text and graphic) in conjunction with single-button control and remaining cycle time indication
- **WASHSMART app:** controlling your warewash operation with smart technology: status and messages, usage and operating costs, hygiene, service and consumables order
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **Exhaust energy storage:** the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 3 kW, less humidity in the kitchen area and better hygienic conditions
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35 %
- **VAPOSTOP (optional):** prevents vapour escaping from the machine when the hood is opened
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external chemical containers
- **EASY-CLEAN concept:** blue markings in the machine help the operator to identify the components which require cleaning
- **Thermolabel 71 °C:** default temperatures setting acc. European DIN can be switched by operator to a higher thermolabile setting
- **Drain heat recovery (optional):** transfers heat from hot drain water to the fresh-water supply, reducing boiler power consumption and saving up to 36 % of costs (model AMXR)

Proudly Distributed by



Ph: 1300 217 411 sales@warewashingsolutions.com.au