


Curtain Track Assembling Instructions

1, Making sure that the Green Drive Belt is inside the Channel of the inner Track

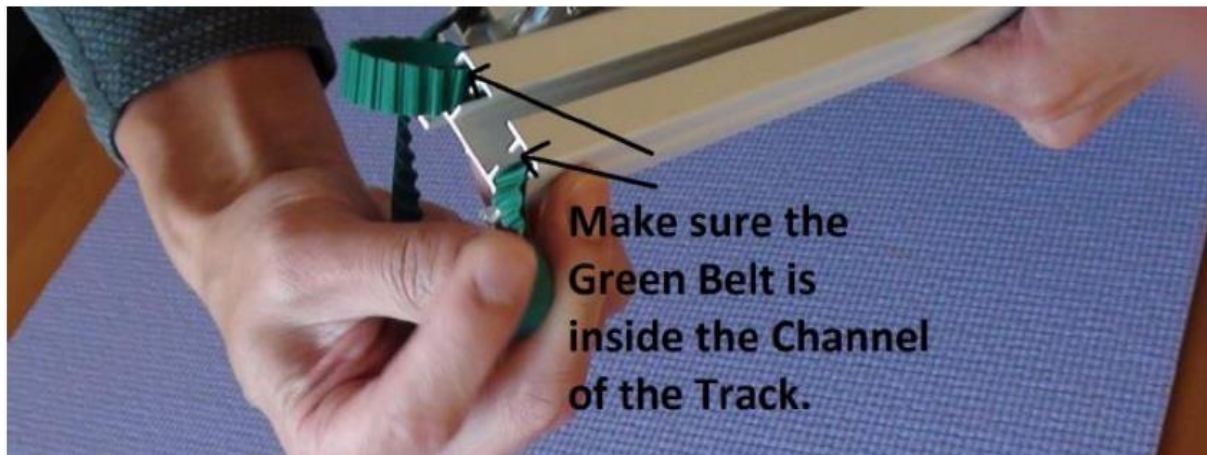


• Note: During the assembling process, pay attention to the Green Belt which should be inside the channel Track. If it slips out at any part of the track, use a small flat headed screw driver to push it back in.

2: Unfold the Track into a straight line.



3: Turn the Track sideways.

Slide the silver Track Connector into the middle of the sections. Tighten the four screws as shown in images 1-4 below • Note: While doing it, push the 2 Track sections together as close as possible. (You may move the Partial Disassembled Carrier and the White Buckle to come together if needed. Be noted that the Green Drive Be bent or crooked)

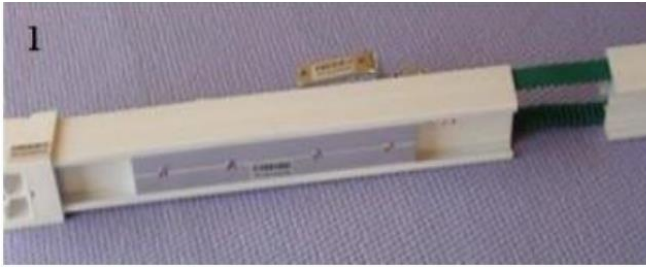

Do not over tighten the screws which might create a splice at the joint, but the screws should be tighten are able to fix the 2 sections together • The Silver Track Connector should be equally in the 2 Track sections and with 2 screws on each track

4: Put the Track facing up and disassemble the Partial Disassembled Carrier.




5: Hand move the Master Carrier back and forth the whole Track a few times to make sure carriers travels smoothly along the Track

6: Install motor and check the track before you fix the whole system on the ceiling.

Install motor


Single track Double tracks(two curtains) Duel tracks (fabric+silk curtain)

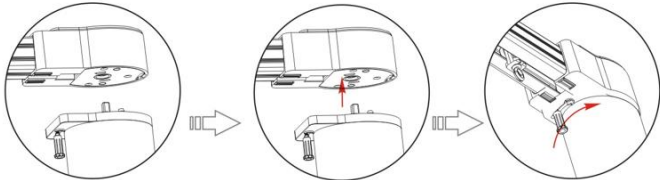

1. Please check and keep the lock bar at the left side as the image

2. Insert the motor to main box


3. Slide the lock bar and make sure it is in the limit hole on the right



Caution

- Please follow the installation drawing above
- Make sure the lock bar in the correct position as image
- Ceiling must be strong enough to hold the track, motor and curtain

Remove motor

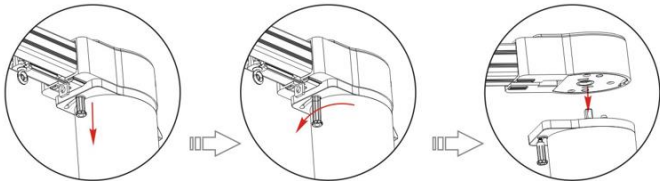

1. Pull the lock bar and make it slide out of the limit hole

2. Slide to the left

3. Removing motor

