




TerraShield Setup Guide



Open the top of the TerraShield:

Remove the turf

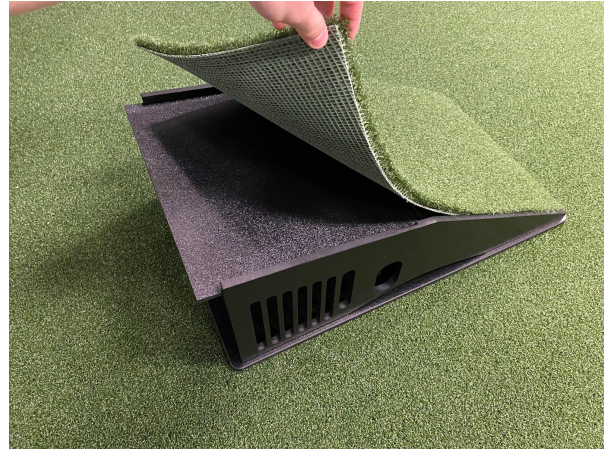

Slide out the first two pieces of the plastic roof



Add projector and wiring:

Place your projector into the
TerraShield



Use the either of the routing
holes on the left side of the
TerraShield for your Video and
Power cables



Using the projector risers:

Included with the TerraShield are two plastic risers. These are used to lift the back end of your projector and help align it with your screen, as projectors typically will project the image upwards.

Slide one or two of the included risers to lower the image from your projector if it is too high up.



Reassemble by sliding the plastic roofs back into place and adding the turf back over top of the TerraShield.