

Scanalato Gradi Right Hand Bathtub

SC-GRA

Installation Guidelines


To ensure precise installation, check the bathroom floor is level.

Scanalato baths come with an integrated support system and adjustable feet. Position the bath in your chosen location.

Important: At this stage, the waste placement and plumbing requirements should already be determined and prepared. Once positioned, adjust the bath feet so the acrylic surround touches the floor.

Using a spirit level, verify that the top edge of the bath is level. If needed, adjust the leveling feet accordingly. Adjusting the feet will cause the acrylic surround to lift slightly off the floor.

Bath Install Leg Detail

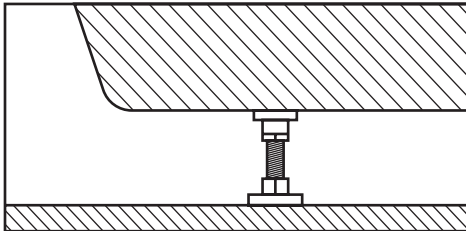


Carefully tilt the bath backward and apply a suitable adhesive to each of the bath feet.

Connect the waste and lower the bath back into position.


Optionally, once the bath is in its final position, you can seal the acrylic surround to the floor with sanitary-grade silicone. Allow it to cure for at least 24 hours before exposing it to water.



1500mm long | SC-GRA-1500RH-MW
Matte White exterior & Gloss White interior

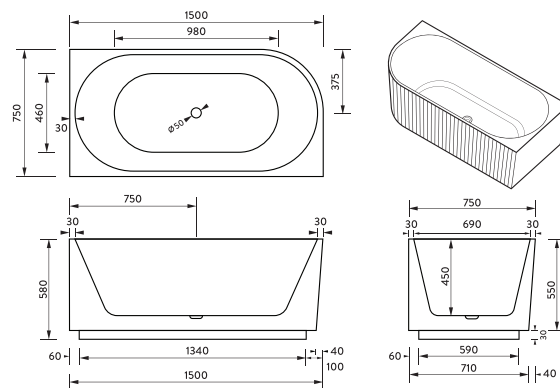

1700mm long | SC-GRA-1700RH-MW
Matte White exterior & Gloss White interior

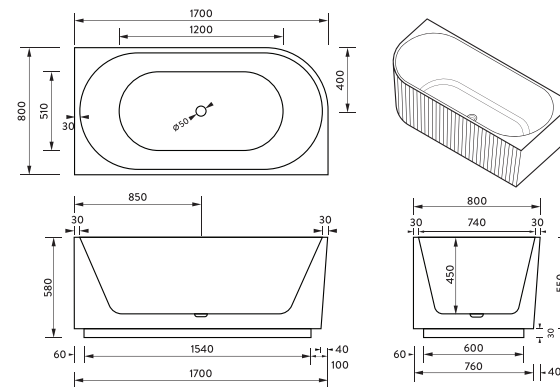

CHECK GOODS THOROUGHLY BEFORE INSTALLATION

Installation of received goods that are damaged, warped or faulty will void warranty. Ensure all items meet your plumbing requirements.

All installations should be carried out by a qualified tradesman in compliance with the National Plumbing & Draining Code or Local Authority Regulations, in accordance with AS/NZS 3500 series of standards and AS/NZS 6400. All Measurements are in millimeters and are subject to change without notice. For acrylic products, please allow +/- 6mm tolerance for manufacturing variance. Please refer to propelindustries.co.nz for the latest product specification.

Warranties

Warranty Periods

Applies to domestic and commercial uses of Propel Industries products, such as private dwellings and retirement villages as well as including, but not limited to: commercial food premises such as restaurants; commercial accommodations such as hotels; hospitals and healthcare facilities; public amenities; and industrial, laboratory and manufacturing facilities.



Warranty Conditions

- Installation has been carried out by a licensed plumber in accordance with the plumbing code of New Zealand.
- All maintenance and adjustments to the product after the installation have been carried out by a licensed plumber.
- Only mild household detergents and soft (non-abrasive) cloth has been used to clean the product.
- All goods of standard quality manufacture (excluding imperfections permitted within AS1976 - Vitreous China used in Sanitary Applications) will be credited or replaced by Propel Industries when advised within the warranty period, subject to prior inspection and agreement.
- Proof of purchase is required for warranty claims.

Warranty Limitations

To the extent permitted under the Trade Practices Act and other relevant legislation, Propel Industries liability is limited to:

- The cost of replacing the goods, or
- The cost of obtaining equivalent goods, or
- The cost of having the goods repaired
- Propel Industries is not responsible for any lack of operation or performance of goods (or any loss or damage) where goods are used or adapted for use with other goods not supplied by Propel Industries.
- It is the responsibility of the customer and installer before installation to ensure that all components are correct and free of obvious visible faults.
- Propel Industries is not responsible for the labour and rectification costs incurred in the above circumstance.

Conditions for On-Site Warranty Service Calls

Propel Industries will charge a service fee for each visit to an installation by its technician where it is determined that the fault is due to poorly executed or unlicensed installation work or where the product is not a genuine Propel Industries product or where the product is outside the warranty period. This may be paid in advance by credit card over the phone to a Propel Industries technician attending the site and will be refunded if the Propel Industries product is found to be at fault.

Cleaning & Care

- Clean only with a soft cloth or sponge using warm water and mild soap or detergent. Do not use any abrasive cleaning materials.
- Do not use any solvents or corrosive liquids.
- Water temperature is not to exceed 50 degrees Celsius or warranty will be void.

For warranty support, please contact Propel Industries



P 0800 427 335 **E** support@propelindustries.co.nz
www.propelindustries.co.nz

All installations should be carried out by a qualified tradesman in compliance with the National Plumbing & Draining Code or Local Authority Regulations, in accordance with AS/NZS 3500 series of standards and AS/NZS 6400. All Measurements are in millimeters and are subject to change without notice. For acrylic products, please allow +/- 6mm tolerance for manufacturing variance. Please refer to propelindustries.co.nz for the latest product specification.