

missionboatgear.com




THE BIG **PICTURE**

All you need, in a glance.

- Never drag! Inflated or deflated.
- Use pump in dual action mode.
- □ Inflate to 4 PSI.
- □ Use in deep water away from hard objects.
- □ D-ring goes down.
- □ Flat fold mat. Never roll.
- ALWAYS store deflated mat in bag.

Deployment

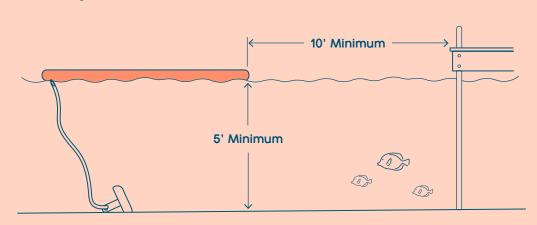

Float at least 10 feet away from any hard surfaces.

Contents Read all instructions and warnings before each use.

MISSION

1 REEF Mat

1 Storage Bag

1 Valve Wrench

1 High Capacity Hand Pump

1 Repair Kit (*Glue not included)

Use the D-ring to secure the mat in water deeper than 5 feet.

Check safety warnings for additional precautions.

Inflation

For faster inflation, start with the pump in "Double Action" mode. If it becomes difficult to pump, switch the lever over to "Single Action."



Lay flat with valve up Remove cap. *Avoid rough surfaces like driveways



Click the valve stem up to ensure that it is closed. *If it is not closed, air will escape when the hose is removed.



Attach the hose to the **INF** port on the pump.

Insert hose into the valve and turn clockwise to lock.



Inflate to desired pressure

2-3 PSI - a softer feel for 1-3 users 4 PSI - a preferred pressure **5-8 PSI** - a firmer feel or more users

*DO NOT INFLATE BEYOND 10 PSI

FAQ

Why are there white marks on the fold lines when unrolling for the first time? This is normal. They'll disappear after exposure to the sun.

What should I use to clean my REEF?

Clean with mild soap and water as necessary, Never use solvents or abrasive cleaners.

 MISSION Vinyl Cleaner is the perfect cleaner for your mat. · Never use a pressure washer to clean the mat. Permanent damage will occur

Why is my valve leaking air?

It's most likely a loose valve. Use the included valve wrench to tighten.

Storage

Always store your deflated mat in bag.

Never drag on concrete or hard surfaces.

WARNING: Creased edges of folded mat are vulnerable to damage.

Store mat in bag in a cool, dry location protected from sharp objects and critters.

For long term storage: Be sure to completely dry your mat with a soft cloth to prevent mold and mildew.

Deflation



Remove cap. Click the valve stem down to open valve.


*Avoid rough surfaces like driveways




To fully deflate, attach hose to pump using **DEF** port. Use "double action" setting for fast deflation.




Click the valve stem up to close valve. This keeps mat deflated for best fold.



For tips on deflating your mat while on the water use the QR code below.








Are you a visual learner? Scan this QR Code and watch the folding instructions on missionboatgear.com



Flat fold mat.



ALWAYS store deflated mat in bag.



Need to make a repair? Bummer. But don't worry, we'll walk you through it.

Scan this QR Code and watch full repair instructions on missionboatgear.com.



Allow 24 hours for

patch to cure.

*Due to shipping restrictions, we can no longer include adhesive. No worries though, go to www.missionboatgear.com and use discount code "GLUE_ON_US" to receive a complementary tube with free shipping. Alternatively, you can also use HH-66 vinyl cement.

MISSION

