


HOME CREATOR



Installation Guide Double Roller Blinds

www.homecreator.com.au

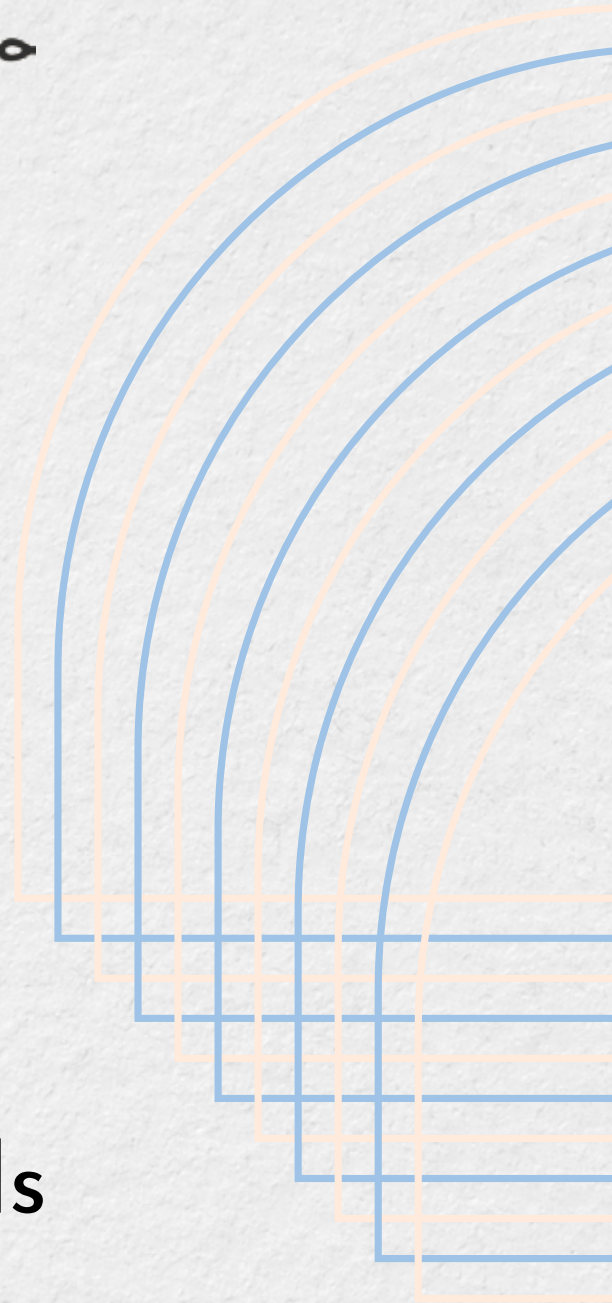

Level 2 – Double Roller Blinds Installation Guide



Left hand clutch double bracket



Right hand clutch double bracket



Idle End Double Bracket with

Idle End Plug




Clutch Double Bracket with

Clutch

- To confirm the position where roller blinds is fitted, recess fitting or face fitting.
- To confirm the position where Clutch (chain position) is fitted.
- Fit sunscreen blinds with back rolling style first on the lower bracket
- Fit blackout blinds with front rolling style on the upper bracket.



Fitting Position



Clutch to Clutch bracket



Idle End Plug to Idle End bracket



Fit Clutch bracket



Measure the blinds width,
fit Idle end bracket on the other side.



Insert clutch side into
lower clutch bracket
(sunscreen blinds)



Insert idle end plug into
lower idle end bracket
(sunscreen blinds)



Using spirit level to check
if the blinds fitted on the same level



Rolling control chain to put sunscreen blinds down



Insert clutch side into
upper clutch bracket
(blackout blinds)



Insert idle end plug into
upper idle end bracket
(blackout blinds)



Adjust two blinds and finished installation.



- To fix Child Safety Device

Our blinds are provided as standard with a compliant child-safety device, which must be installed.

The chain is less than 1500mm from floor level, safely preventing any risk of accidental strangulation.

1. Hole the device against the wall and mark the location of the screw hole.
2. Attach our cord – guide on the chain and fix the device to the wall.