



# Rotary Tool Kit Operator's Manual



## PACKAGE INCLUDES

<b>Cutting/Drilling Guide</b>  x1	<b>Flex Shaft</b>  x1
<b>Protective Shield</b>  x1	<b>Wrench</b> Spanner x1 L-pin x1
<b>Polishing/Cleaning</b> Felt Wheels x2 Small Felt Wheels x5 Stainless Steel Brush x1 Mandrel For Felt Wheel x1	<b>Sanding</b> Sanding Bands x10 Slim Sanding Bands x10 Sanding Paper x80 Sanding Drum x1 Slim Sanding Drum x1
<b>Cutting/Collet</b> Cut-off Wheels x40 Cutting Blade With Mesh x2 Diamond Disc x1 Mini Hss Cutter x1 Mandrels For Cut-off Wheel x2 Collet x2	
<b>Drilling/Engraving</b> Drilling Bits For Wood x1 Drilling Bits For Metal x2 Hss Cutter x1 Engraving Cutters x5	<b>Grinding/Sharpening</b> Grinding Head x1 Abrasive Stone x5

## PRODUCT DESCRIPTION



7. Protective Shield

8.Ventilation Openings

**Specifications:**  
 Color:Grey  
 Voltage:120V-60HZ  
 Input Power:135W  
 Accessories:178pcs  
 Adjustable Speed:5 Speeds  
 No Load Speed:10000-35000RPM  
 Special Function:LED Digital Display


Thank you for purchasing this product. To ensure proper use and trouble-free operation, please read this guide carefully before operation. If there is any issue, please contact us via Amazon or email [contact@hardell.com](mailto:contact@hardell.com). We will help you within 12 hours.



FCCE


## HOW TO USE

### Without Flex Shaft

			
1. Press down the safety lock button, take off the chuck nut.	2. Choose the suitable chuck and put the chuck nut.	3. Insert the accessory you need, screw on the nut until you hear a lock sound.	4. Release the safety lock button.

### with Flex Shaft

					
1. Unscrew the plastic nut, hold the safety lock button, and unscrew the chuck nut.	2. Pull out the shaft and insert the chuck.	3. Press down the safety lock button and use a spanner/your fingers to tighten the chuck nut.	4. Tighten the shaft cap.	5. Insert the L-pin into the small hole at the end of the flexible shaft and hold it to open the chuck nut.	6. Insert an accessory that you need, hold down the L-pin, and use a spanner/your fingers to tighten the chuck nut.

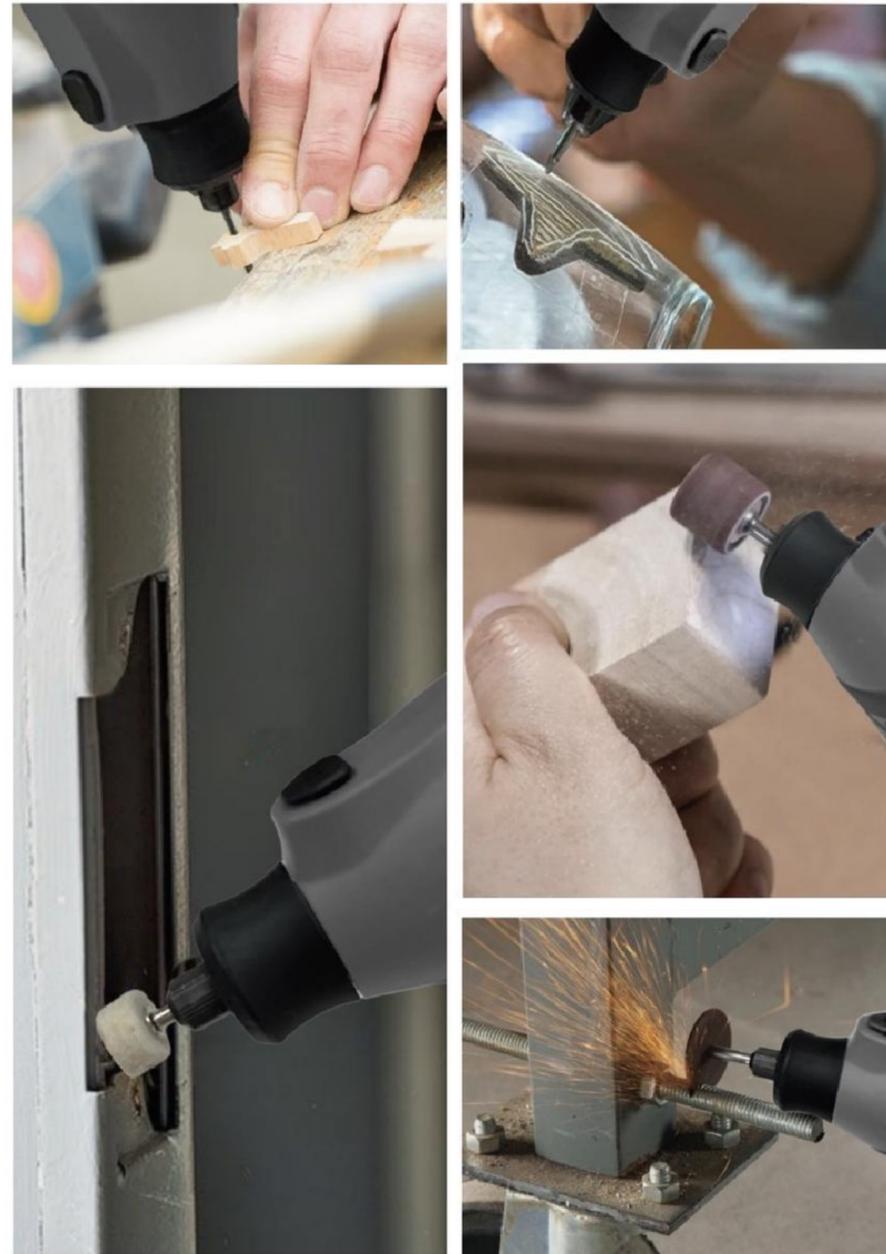

**Attention** Donoopaehaoayoomoehan15mnuea

any one time. Allow the rotary tool to cool for 15 minutes before second use.

### Safety Instructions:

1. Keep this product away from children.
2. Keep this product away from water.
3. Do not touch it with wet hands.
4. Do not place the product on hot surfaces, near hot surfaces or an open fire.
5. Do not dismantle the appliance under any circumstances.
6. Do not hold the work by hand or against your body and may lead to loss of control.
7. Do not replace accessories while the tool is on.
8. Maintain tools with care. Keep cutting tools sharp and clean.
9. Use only accessories that are recommended by the manufacturer for your model.
10. Use this power tool and accessories following the instructions.

### Warranty:

The product supports a 1-year warranty from the date of purchase. This warranty does not apply to products that have been lost, altered, broken, or damaged by misuse or failure to follow the instruction provided with the product. Never try to repair the product by yourself. For any inquiries concerning our products, please contact our after-sales team via [contact@hardell.com](mailto:contact@hardell.com) at any time.