

DUO STANDS

Heavy duty four leg height adjustable, pin lock pipe stands

The Duo is height adjustable and uses quick change style heads. Designed for large diameter pipe rotation and feeding. With locking brakes on the wheels to secure the load for marking, layout or fit-up.

Now supplied with folding legs as standard for ease of use and transport and ultra safe pin locking design.

Features and Advantages

- Load capacity 2,400kg / 5,290lbs
- Folding legs for ease of transport and storage
- Self centering head adjustment from either side
- Height adjustable 29 - 42.5" (74.5 - 108cm)
- 2 - 48" (51 - 1219 mm) pipe diameter capacity
- Quick height adjustment with additional fine thread for workpiece levelling
- 'Trued' wheels eliminate 'corkscrewing' of pipe during rotation
- Lockable wheels to hold pipe in position
- Safety pins to lock stand at working height
- CE Conformity Certified with CE Mark

The Duo Stand utilises the fine adjustment thread. This allows precise adjustment of the working height and can compensate for uneven surfaces to ensure pipe is level at all times.

The unique safety locking pins allow the Duo Stand to be fixed at the various working heights.

Final adjustment and leveling can then be made with the fine adjustment handle.



NEW
IMPROVED
PIN LOCK
DESIGN



Max 108cm / 42.5"
Min 74.5cm / 29"



The Quick Change style heads increase the versatility of the duo stand.

The heads can be changed in a matter of seconds, without tools, to adapt to almost any applications.

Roller wheels are available in steel, stainless steel or nylon. Ball transfer heads are available in steel or stainless steel.



Simple Head Changeover




1. Lift quick release tab



2. Slide forward and remove



Various height holes enable the operator to fix the stand at the required working height using the safety locking pins

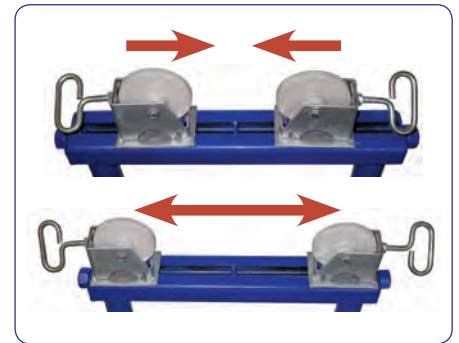

Self centering adjustable heads from 2 - 48" pipe

Base Unit Only



| PART NO. | LOAD CAPACITY (KG / LBS) | WEIGHT (KG / LBS) |
|----------|--------------------------|-------------------|
| DPS200 | 2,400kg / 5,290lbs | 19.5kg / 43lbs |

Pair Nylon Wheel Heads



| PART NO. | LOAD CAPACITY (KG / LBS) | WEIGHT (KG / LBS) |
|----------|--------------------------|-------------------|
| * NWH200 | 450kg / 990lbs | 2.2kg / 5lbs |

Pair Ball Transfer Heads



| PART NO. | LOAD CAPACITY (KG / LBS) | WEIGHT (KG / LBS) |
|------------|--------------------------|-------------------|
| BTH200 | 1,450kg / 3,197lbs | 3kg / 6lbs |
| * BTH200SS | 1,450kg / 3,197lbs | 3kg / 6lbs |

Pair Steel Wheel Heads



| PART NO. | LOAD CAPACITY (KG / LBS) | WEIGHT (KG / LBS) |
|------------|--------------------------|-------------------|
| SWH200 | 2,400kg / 5,290lbs | 3kg / 6lbs |
| * SWH200SS | 2,400kg / 5,290lbs | 3kg / 6lbs |

* Suitable for Stainless Steel

