

SLK

Wienold Superlift with counterbalance weights

Material lift

Particularly for Handicraft

For lifting 300 kg up to 7,90 m




SLK: Vigorous Material lift for Craftsmen

The Wienold Superlift with counterbalance weights is optimal in order to bring loads e.g. directly to walls, or on high lying porches. Therefore we arranged the outriggers and counterbalance weights in the back and the lifting attachments in front of the lift.

The Superlift is an ideal aid for handling heavy loads especially to handle window panes, heating and ventilation. The SLK is available in five pay loads of 300 - 450 kg. Scope of supply: four large swivel casters, 1-gear winch, counterbalance weight box with 8 x 16 kg weights.

Glazing @ it's best.

Ideal addition to the Superlift are our vaccum jacks: glass and window pane assemblies or building wintergardens will become faster and more simple by less physical effort.

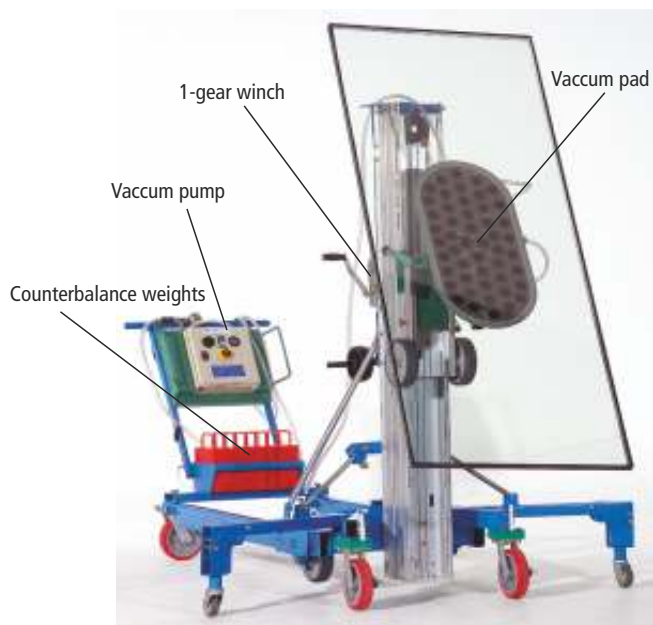

Vacuum attachment with electric pump: Scheibenbutler de Luxe SDL



Lifting and positioning heavy and large loads absolute safely and easily



Assemblies at walls easily made with the Wienold SLK



Technical Data	SLK-5	SLK-10	SLK-15	SLK-20	SLK-25
Lifting height - Standard forks up:	2,00 m	3,50 m	5,00 m	6,50 m	7,90 m
Height - stowed:	2,04 m	2,04 m	2,04 m	2,04 m	2,04 m
Length - stowed:	0,90 m	0,90 m	0,90 m	0,96 m	1,02 m
- Working position:	1,50 m	1,50 m	1,80 m	2,22 m	2,22 m
Width - stowed:	0,80 m	0,80 m	0,80 m	0,80 m	0,80 m
- Working position:	2,20 m	2,20 m	2,20 m	2,20 m	2,20 m
Ground clearance - working position:	0,08 m	0,08 m	0,08 m	0,08 m	0,08 m
Loading height min.:	0,27 m	0,27 m	0,27 m	0,27 m	0,27 m
Pay load:	450 kg	450 kg	360 kg	360 kg	300 kg
Weight basic chassis:	98 kg	118 kg	144 kg	184 kg	204 kg
Weight complete (+ 8x counterbalance weights á 16 kg):	226 kg	246 kg	272 kg	312 kg	332 kg