




Polaris RZR Standard Rock Sliders 2 & 4 Seat

Polaris RZR Tree Kickers 2 & 4 Seat

Thank you for purchasing our product. Below is a brief description on installation. Installation is basically the same for all products mention above.

1. Remove factory lower bolts as shown in picture. Save for later. (Tree Kickers will NOT use the rear upper factory bolt)
2. Set rock slider/tree kicker up to machine with the 45 degree cut on the tube facing forward.
3. Reinstall the factory bolts and snug them up to hold slider in place. Make sure the back side of the slider is tight to the machine. On tree kickers you may have to leave the factory lower bolts slightly loose until the rear upper anchor is installed.
4. Grab the anchors provided with the slider. Make sure the anchor itself is snug together *before* putting on machine. This keeps the nut on the anchor from spinning.
5. Slide the anchor through the large hole of the slider next to the factory bolt. Using a 19mm wrench to hold the flats of the anchor, tighten the 13mm bolt head to **17 ft lbs**. Do not exceed!

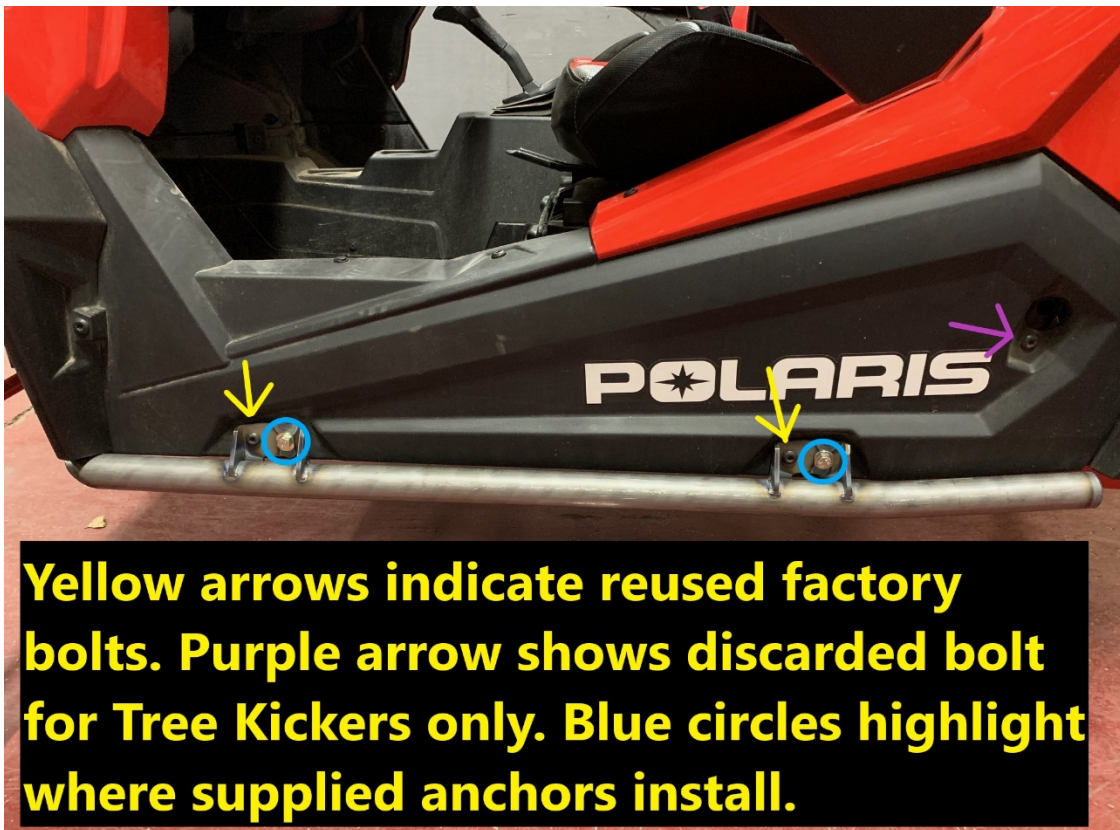

Yellow arrows indicate reused factory bolts. Purple arrow shows discarded bolt for Tree Kickers only. Blue circles highlight where supplied anchors install.