

## **PHOENIX**

LED PHEONIX PENDANT

The "PHOENIIX" series LED Luminaries is sure to impress. Utilizing an aluminum frame and solid acrylic lens for both down- light and up-light with a 360-degree spread, these provide a sleek option for architectural design. Fixtures color temperatures 3000K/3500K/4000K all in 1 select by Internal CCT Color selector switch or Tunable white & dimming by Wall switch / Smart phone control / Voice control. Perfect for office, conference room, hospital, labs and any other commercial applications.



Fixture can be manually adjusted from 1' to 10' with standard cable. Longer custom lengths available. Standard Finishes - Black, White, Silver, and Bronze. Other finishes available.



Silver







Material: Canopy Iron + Aluminium Profile + Acrylic

10' Adjustable Aircraft Cable/Power Cord Included (Custom length available)

Efficiency: Up to 85 LPW

CCT Selectable (Standard): 3000K, 3500K, 4000K

Controls: 1-10V (Standard), Color Tunable white & Dimming control by Wall Switch Phone

App, voice control ZigBee 3 in 1 Emergency Battery back up available Limited Warranty: 5 Years Ships Assembled UL, cUL, FCC Power factor: ≥0.95

Input Voltage: 100-277V universal

Beam Angle: 120°

Operating temperature: -40°F to 122°F







Model Information:	Example: SB-DE/SS/40W/S1S
--------------------	---------------------------

Products series	Options	Profile Finishes
SB-DE/SS/40W/S1S SB-DE/SS/40W/S1W	Blank=Color Selectable 3K/35K/4K (Standard), 4K factory color set	S=Platinum Silver (Stock Color)
	L=Line Triac dimming	W=Gloss White (Stock Color)
		Full Color Name or RAL number for Custom Colors

3000K-4000K Tunable white & Dimming control by DimTone wall Switch, Phone App and voice control are built in
















## Accessory

ACCESSORY ITEMS	MODEL NUMBER	DESCRIPTION
SCAN TO DOWNLOAD THE APP	SB-TONE-WSX	Tunable white & dimming DimTone Wall switch by moving 2 sliders on wall switch also available control by phone App and voice, 1 Wall Switch controls Max 700W light fixtures, 120V with no battery required
SB-EBP/5W/B Factory installed Remote Emergency Battery Pack 5W 9		Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## **Dimension & Weight:**

SB-DE/SS/40W/S1S: with canopy

## 13 lbs

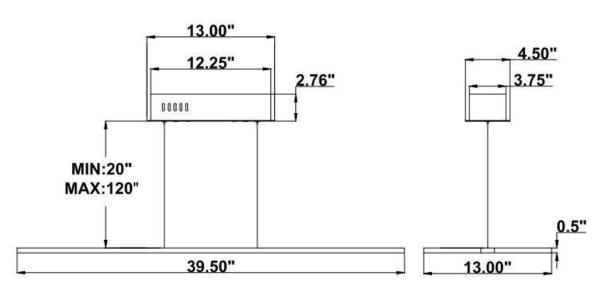

SB-DE/SS/40W/S1W: Remote Mount

13 lbs

