




# Albero

Item number: 33779



## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 275 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5852 Crib 5, IMO Res. A652 (16), C1 Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Care</b>	

State: 24.03.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Alessio DIMOUT

Item number: 29454




## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 295 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII),
<b>Dimout Rate</b>	The article stands out due to his significant high darkening effect.
<b>Lightfastness</b>	note 5-6
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/-1%, weft approx. +/-1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. +/-1%, weft approx. +/-1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 4-5, wet: note 4-5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 24.03.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

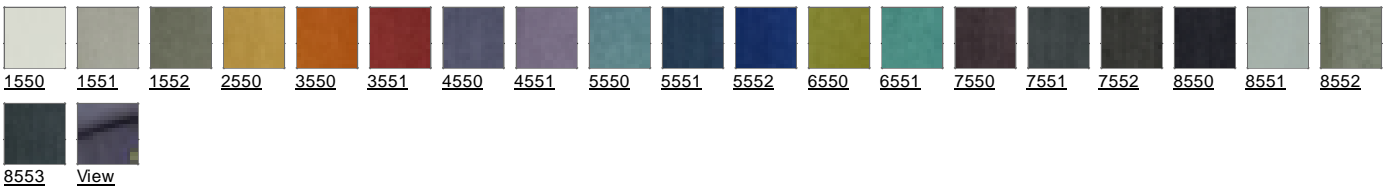

## Ambra DELIGARD

Item number: 36187




### Technical Sheet

<b>Width</b>	approx. 134 cm
<b>Weight</b>	approx. 695 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	Effective coat 100% Polyester
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, IMO Res. A471 (XII), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 60000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 5 at 2000 rubs
<b>Hydrostatic pressure test</b> DIN EN 20811	20 mbar
<b>Spray test</b> DIN EN 24920	note: 4
<b>Care</b>	see cleaning instructions for <u>DELIGARD</u> qualities Wir empfehlen, lösungsmittelfreien Kleber zu verwenden.

State: 24.03.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Ava

Item number: 36507





## Technical Sheet

<b>Width</b>	approx. 145 cm
<b>Weight</b>	approx. 220 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 5 cm, width approx. - cm
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Care</b>	

State: 24.03.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

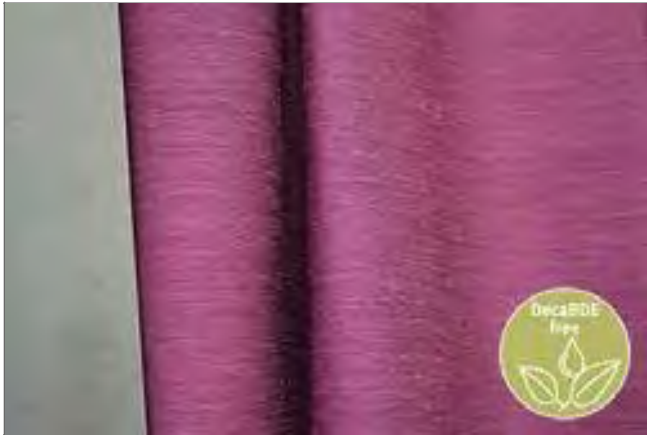

# Balea DELIBLACK

Item number: 36052




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 295 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Acrylat Softbeschichtung
<b>Flame retardant</b>	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
<b>Lightfastness</b>	note 5-6
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Rub Fastness</b>	dry: note 4-5, wet: note 4-5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 24.03.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

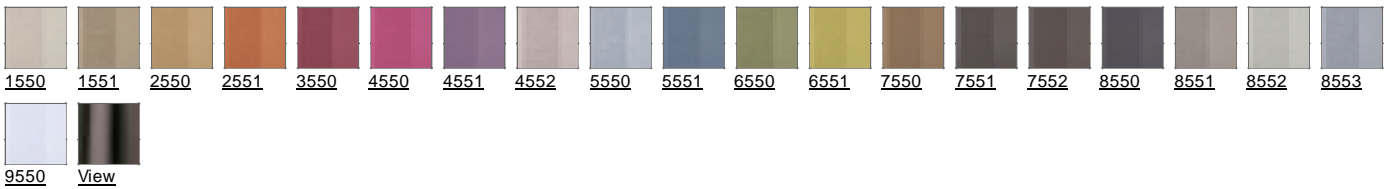


# Bond DIMOUT

Item number: 36427




## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 275 g/m <sup>2</sup>
<b>Repeat</b>	length approx. - cm, width approx. 16,5 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
<b>Dimout Rate</b>	The article stands out due to his significant high darkening effect.
<b>Lightfastness</b>	note 4-5
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 5, wet: note 5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 01.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

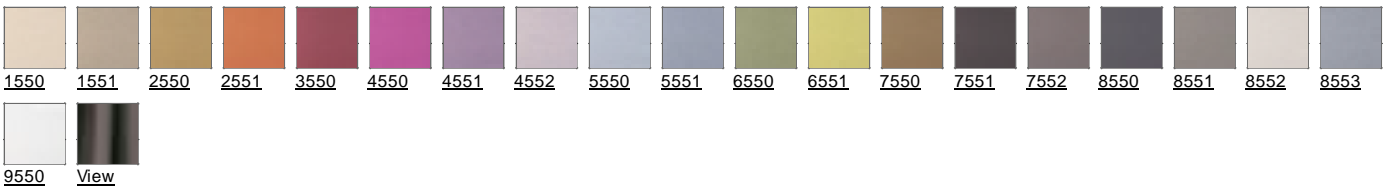


# Chester DIMOUT

Item number: 36416





## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 275 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
<b>Dimout Rate</b>	The article stands out due to his significant high darkening effect.
<b>Lightfastness</b>	note 4-5
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 5, wet: note 5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 01.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

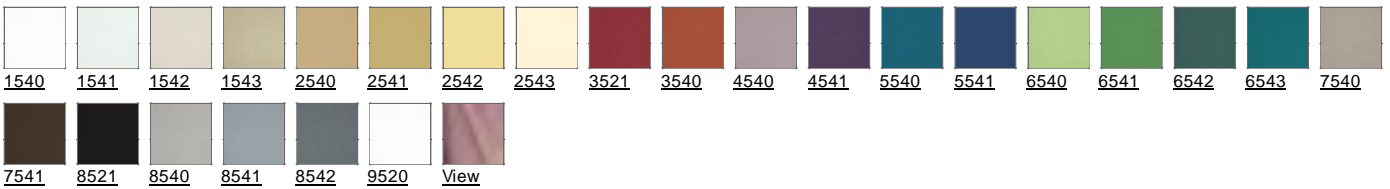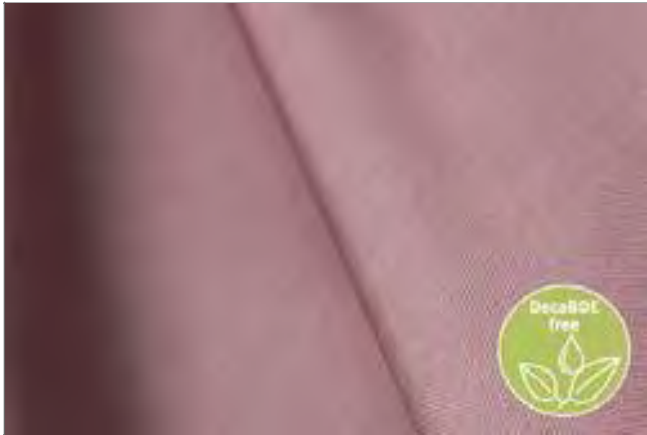


# Comet DELIBLACK

Item number: 48889




## Technical Sheet

<b>Width</b>	approx. 138 cm
<b>Weight</b>	approx. 270 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Acrylat Softbeschichtung
<b>Flame retardant</b>	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII),
<b>Lightfastness</b>	note 4-5
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/-1%, weft approx. +/-1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Rub Fastness</b>	dry: note 4-5, wet: note 4-5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 26.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.





## Comino DELIGARD

Item number: 27040



### Technical Sheet


<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 449 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	Effective coat 100% Polyester
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, IMO Res. A652 (16), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Hydrostatic pressure test</b> DIN EN 20811	60 mbar
<b>Spray test</b> DIN EN 24920	note: 5
<b>Care</b>	see cleaning instructions for <u>DELIGARD</u> qualities
<i>State: 03.08.2015</i>	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Contralux

Item number: 34057



## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 350 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 C1 ,
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Sound absorption factor</b>	0.8
<b>Sound absorption class</b>	B
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




## Contralux 300

Item number: 34068




Raumhöhe in 300 cm

### Technical Sheet

<b>Width</b>	approx. 300 cm
<b>Weight</b>	approx. 350 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 7176, BS 5867 TYP B, IMO Res. A471 (XII), C1
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Sound absorption factor</b>	0.8
<b>Sound absorption class</b>	B
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

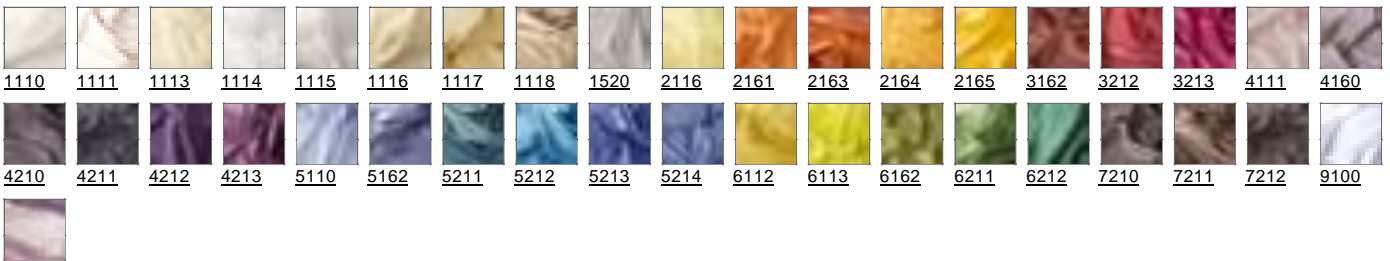

[View](#)


# Desiree Chintz DELILIGHT

Item number: 39607




Raumhöhe in 300 cm

## Technical Sheet

<b>Width</b>	approx. 300 cm
<b>Weight</b>	approx. 77 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	
<b>Care</b>	

State: 26.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



## Divan DELILIGHT

Item number: 29942



Raumhöhe in 310 cm

### Technical Sheet


<b>Width</b>	approx. 310 cm
<b>Weight</b>	approx. 90 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %

#### Care



State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

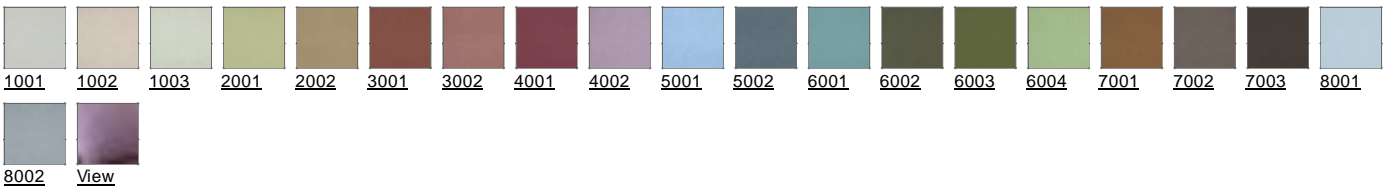


# Dos

Item number: 33953




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 185 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 , note 5-6
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	dry: note 4-5, wet: note 4-5
<b>Rub Fastness</b> DIN EN ISO 105-X12	
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



[View](#)

# Elvin DELIGARD


Item number: 36176



## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 500 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	Effective coat 100% Polyester
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 5 at 2000 rubs
<b>Hydrostatic pressure test</b> DIN EN 20811	40 mbar
<b>Spray test</b> DIN EN 24920	note: 3
<b>Care</b>	see cleaning instructions for <u>DELIGARD</u> qualities
<i>State: 29.07.2015</i>	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

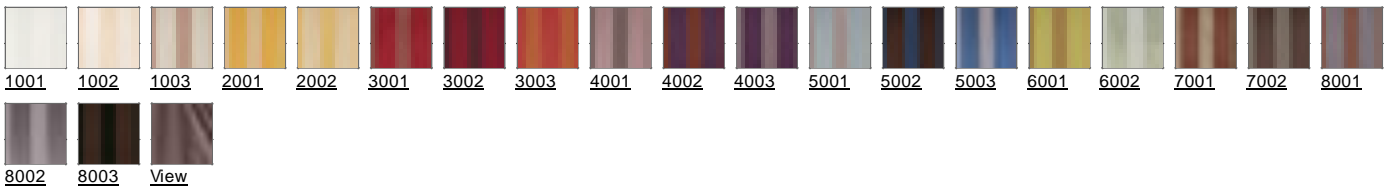


# Erino

Item number: 29589




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 220 g/m <sup>2</sup>
<b>Repeat</b>	length approx. - cm, width approx. 4,5 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.





## Fellini DELIGARD

Item number: 27903



### Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 390 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	Effective coat 100% Polyester
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, IMO Res. A652 (16), Flame-resistance is dependant of foam that is used. note 5-6
<b>Lightfastness</b> DIN EN ISO 105-B02	
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 70000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4 at 2000 rubs
<b>Hydrostatic pressure test</b> DIN EN 20811	30 mbar
<b>Spray test</b> DIN EN 24920	note 4
<b>Care</b>	see cleaning instructions for <u>DELIGARD</u> qualities
<i>State: 20.07.2015</i>	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Gavi

Item number: 29352




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 280 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 7176, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 6-7
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/- 1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/- 1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 80000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Sound absorption factor</b>	0.6
<b>Sound absorption class</b>	C
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

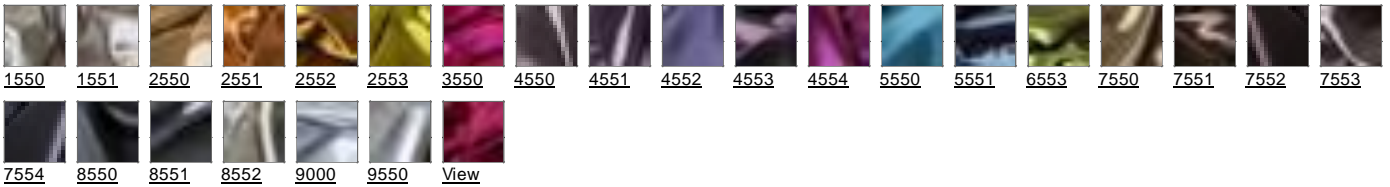


## Glamour DIMOUT

Item number: 33046




### Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 245 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII),
<b>Dimout Rate</b>	The article stands out due to his significant high darkening effect.
<b>Lightfastness</b>	note 4-5
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. +/- 1%, weft approx. +/- 1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 5, wet: note 5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 13.01.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




## Gordon DIMOUT

Item number: 36438




### Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 260 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 8 cm, width approx. 9,5 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
<b>Dimout Rate</b>	approx. 99 %
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Sound absorption factor</b>	0.65
<b>Sound absorption class</b>	C
<b>Care</b>	

State: 01.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Juno

Item number: 29603




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 260 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 9,5 cm, width approx. 3,5 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Justus

Item number: 48685




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 480 g/m <sup>2</sup>
<b>Repeat</b>	length approx. - cm, width approx. 17,5 cm
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 7176, BS 5867 TYP C, BS 5852 Crib 5, IMO Res. A652 (16), EN 13773 , Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

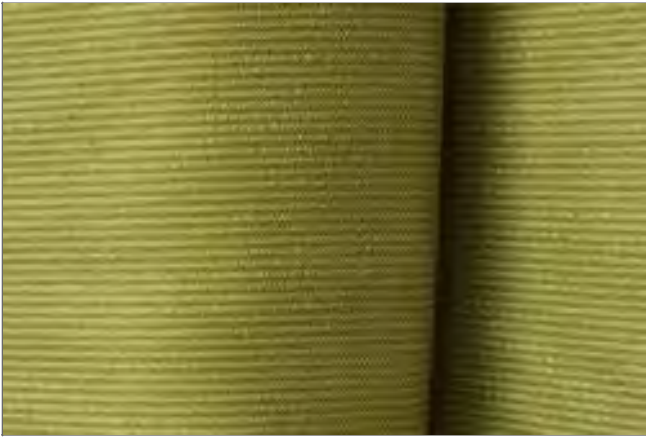

# Karat DIMOUT

Item number: 24585



## Technical Sheet

<b>Width</b>	approx. 155 cm
<b>Weight</b>	approx. 280 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII),
<b>Dimout Rate</b>	approx. 99 %
<b>Lightfastness</b>	note 4-5
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/-1%, weft approx. +/-1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. -1,5%, weft approx. +/-1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 4-5, wet: note 4-5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 13.01.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



## Keto DELILIGHT

Item number: 32619



Raumhöhe in 300 cm


### Technical Sheet

<b>Width</b>	approx. 300 cm
<b>Weight</b>	approx. 160 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	
<b>Care</b>	

State: 04.05.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



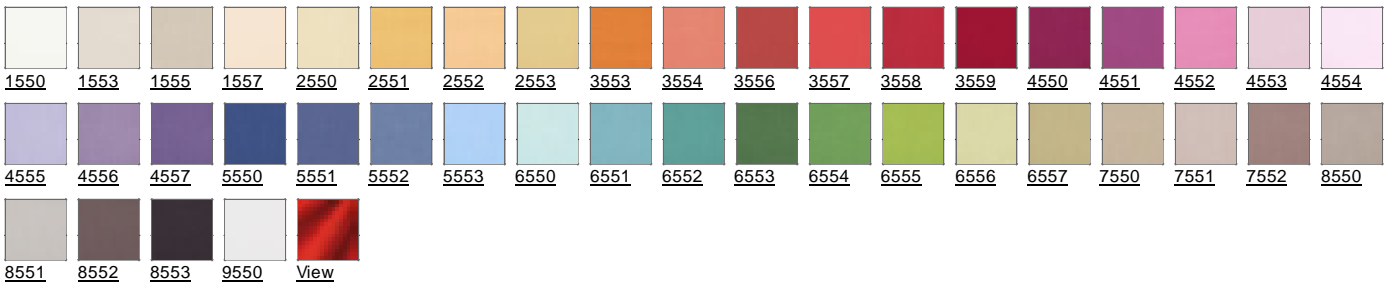


# Lexa

Item number: 25861



## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 250 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), C1 Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 20000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 3-4 at 2000 rubs
<b>Care</b>	

State: 26.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Luma

Item number: 29873




Raumhöhe in 300 cm

## Technical Sheet

<b>Width</b>	approx. 300 cm
<b>Weight</b>	approx. 280 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), EN 13773 , Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 50000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




1520 1521 2520 3520 4520 5520 6520 8520 8521 [View](#)

## Makoto DIMOUT

Item number: 36890



### Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 260 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 69 cm, width approx. 46 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773
<b>Dimout Rate</b>	approx. 99 %
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Sound absorption factor</b>	0.65
<b>Sound absorption class</b>	C
<b>Care</b>	

State: 10.05.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Mirano

Item number: 29614



## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 290 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Modena

Item number: 33432




Raumhöhe in 320 cm

## Technical Sheet

<b>Width</b>	approx. 320 cm
<b>Weight</b>	approx. 110 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	52% Polyester Trevira CS / 48% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), note 4
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Moiré Future DIMOUT

Item number: 33363




## Technical Sheet

<b>Width</b>	approx. 147 cm
<b>Weight</b>	approx. 230 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
<b>Dimout Rate</b>	The article stands out due to his significant high darkening effect.
<b>Lightfastness</b>	note 4-5
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/-1%, weft approx. +/-1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. +/-1%, weft approx. +/-1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 4-5, wet: note 4-5
<b>DIN EN ISO 105-X12</b>	
<b>Care</b>	

State: 13.01.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




## Odetta

Item number: 48674



### Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 450 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 35 cm, width approx. 35 cm
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 7176, BS 5867 TYP C, BS 5852 Crib 5, IMO Res. A471 (XII), EN 13773 , Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



## Opera DELIGARD

Item number: 36165




### Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 560 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	Effective coat 100% Polyester
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, IMO Res. A652 (16), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Hydrostatic pressure test</b> DIN EN 20811	25 mbar
<b>Spray test</b> DIN EN 24920	note: 4
<b>Care</b>	see cleaning instructions for <u>DELIGARD</u> qualities Wir empfehlen, lösungsmittelfreien Kleber zu verwenden.

State: 14.12.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



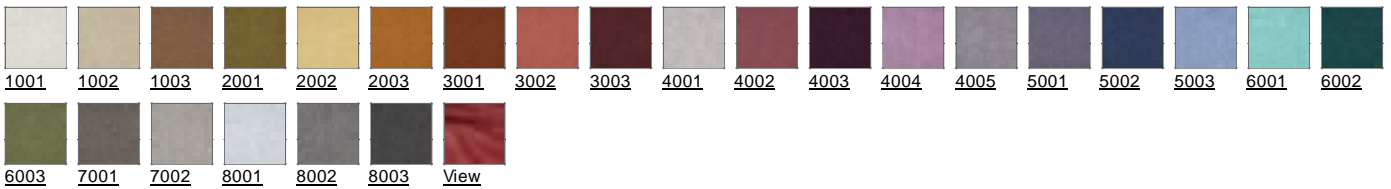


# Oxford

Item number: 26944




## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 390 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Wolle
<b>Flame retardant</b>	DIN 4102/B2, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5867 TYP B, IMO Res. A471 (XII), IMO Res. A652 (16), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-3%, weft approx. +/-1,5 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 30000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 2-3 at 2000 rubs
<b>Sound absorption factor</b>	0.85
<b>Sound absorption class</b>	B
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

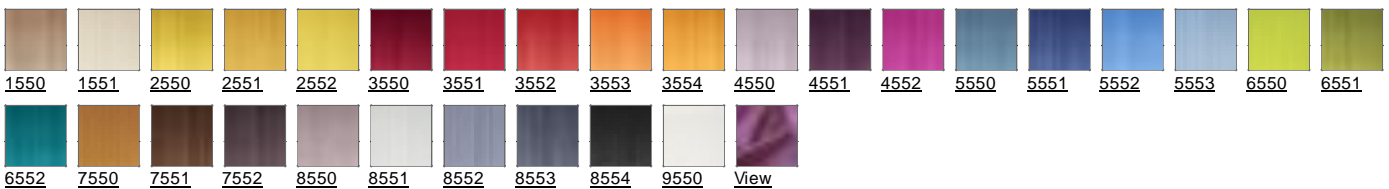


# Palas

Item number: 36584




## Technical Sheet

<b>Width</b>	approx. 145 cm
<b>Weight</b>	approx. 520 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 4-5 at 2000 rubs
<b>Sound absorption factor</b>	0.75
<b>Sound absorption class</b>	C
<b>Care</b>	

State: 01.02.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

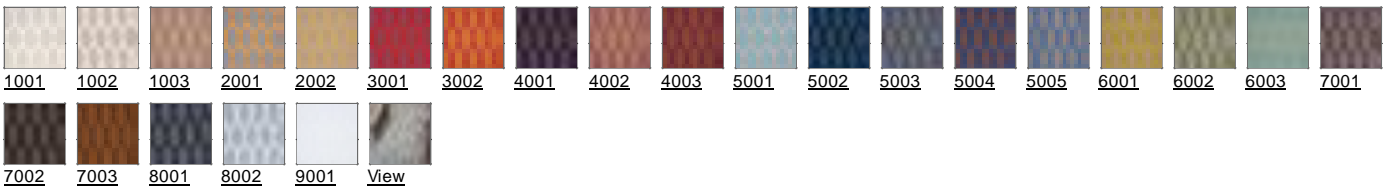


# Pina

Item number: 27539




## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 245 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 7,5 cm, width approx. 3 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 , note 5-6
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	dry: note 4-5, wet: note 4
<b>Rub Fastness</b> DIN EN ISO 105-X12	
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

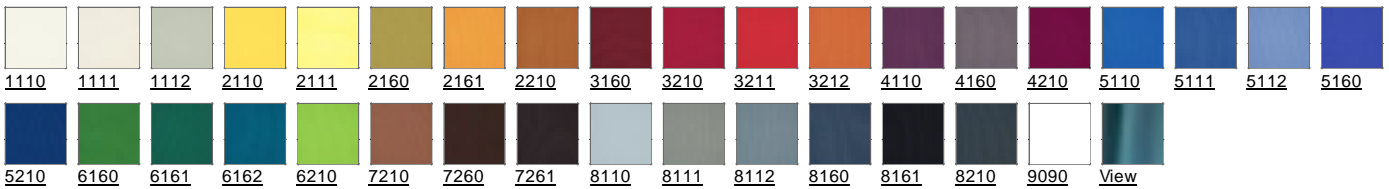

# Platus

Item number: 27685



## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 240 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, IMO Res. A471 (XII), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 3-4 at 2000 rubs
<b>Care</b>	

State: 29.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




## Platus 300

Item number: 26015



Raumhöhe in 300 cm

### Technical Sheet

<b>Width</b>	approx. 300 cm
<b>Weight</b>	approx. 240 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, IMO Res. A471 (XII), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 40000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 3-4 at 2000 rubs
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




## Sisto DIMOUT

Item number: 29443




### Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 300 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
<b>Dimout Rate</b>	The article stands out due to his significant high darkening effect.
<b>Lightfastness</b>	note 5-6
<b>DIN EN ISO 105-B02</b>	
<b>Fastness to Washing 40°</b>	note 4-5
<b>DIN EN ISO 105-C10</b>	
<b>Fabric relaxing washing 40°C</b>	warp approx. +/-1,5%, weft approx. +/-1 %
<b>DIN EN ISO 6330/DIN EN ISO 5077</b>	
<b>Fabric relaxing dry cleaning</b>	warp approx. +/-1,5%, weft approx. +/-1 %
<b>DIN EN ISO 3175-1</b>	
<b>Rub Fastness</b>	dry: note 4-5, wet: note 4
<b>DIN EN ISO 105-X12</b>	
<b>Sound absorption factor</b>	0.85
<b>Sound absorption class</b>	B
<b>Care</b>	

State: 13.01.2016

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



# Tiba DELIGARD

Item number: 33614



## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 480 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	Effective coat 100% Polyester
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, IMO Res. A652 (16), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 3-4, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 60000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 5 at 2000 rubs
<b>Hydrostatic pressure test</b> DIN EN 20811	40 mbar
<b>Spray test</b> DIN EN 24920	note: 3-4
<b>Care</b>	see cleaning instructions for <u>DELIGARD</u> qualities
<i>State: 25.09.2015</i>	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




# Watson

Item number: 34942




## Technical Sheet

<b>Width</b>	approx. 150 cm
<b>Weight</b>	approx. 360 g/m <sup>2</sup>
<b>Repeat</b>	no repeat
<b>Composition</b>	100% Wolle
<b>Flame retardant</b>	DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), Flame-resistance is dependant of foam that is used.
<b>Lightfastness</b> DIN EN ISO 105-B02	note 5-6
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-3%, weft approx. +/-2 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 3-4, wet: note 4-5
<b>Scrub resistance Martindale</b> DIN EN ISO 12947-2 / DIN EN 14465-2006	approx. 25000 rubs
<b>Pilling</b> DIN EN ISO 12945-2	note 3-4 at 2000 rubs
<b>Sound absorption factor</b>	0.9
<b>Sound absorption class</b>	A
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



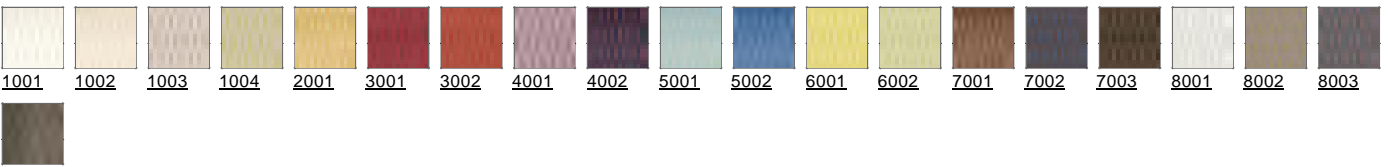


[View](#)

# Zelda

Item number: 29636



## Technical Sheet

<b>Width</b>	approx. 140 cm
<b>Weight</b>	approx. 250 g/m <sup>2</sup>
<b>Repeat</b>	length approx. 9 cm, width approx. 2 cm
<b>Composition</b>	100% Polyester FR
<b>Flame retardant</b>	DIN 4102/B1, DIN EN 1021 Teil 1, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), EN 13773 , note 4-5
<b>Lightfastness</b> DIN EN ISO 105-B02	note 4-5
<b>Fastness to Washing 40°</b> DIN EN ISO 105-C10	note 4-5
<b>Fabric relaxing washing 40°C</b> DIN EN ISO 6330/DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
<b>Fabric relaxing dry cleaning</b> DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
<b>Rub Fastness</b> DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
<b>Care</b>	

State: 20.07.2015

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.