




## Abby DELILIGHT

Article Number 36926

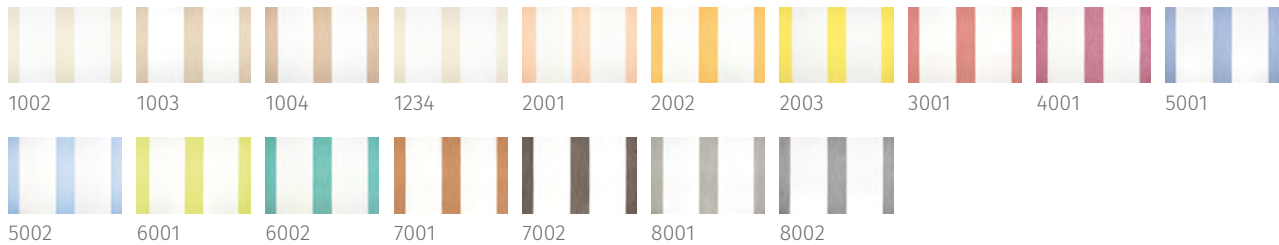

Width	300 cm
Weight	104 g/m <sup>2</sup>
Repeat	length approx. - cm, width approx. 22,5 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	
Care Health & Care	
Other	Supplied with lead possible with a surcharge.



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Acrobat Desiree-Chintz DELILIGHT

Article Number 27878



1520

Width	140 cm
Weight	71 g/m <sup>2</sup>
Repeat	length approx. 300 cm, width approx. 138 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	
Care Health & Care	
Other	Supplied with lead possible with a surcharge.






The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Acrobat Opus

Article Number 27834




1521



Width	140 cm
Weight	220 g/m <sup>2</sup>
Repeat	length approx. 300 cm, width approx. 138 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Adesso DIMOUT

Article Number 38863




Width	140 cm
Weight	260 g/m <sup>2</sup>
Repeat	length approx. - cm, width approx. 23 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 2%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	
Care Health & Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Adina DELILIGHT


Article Number 39378



1550



1551




9550

Width	295 cm
Weight	54 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/- 1%, weft approx. +/- 1 %
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.











The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Akita DIMOUT

Article Number 32732




1520 1521 3520 5520 6520 8520

Width	140 cm
Weight	260 g/m <sup>2</sup>
Repeat	length approx. 32 cm, width approx. 34,5 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1_%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	    
Care Health & Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

# Albero

Article Number 33779

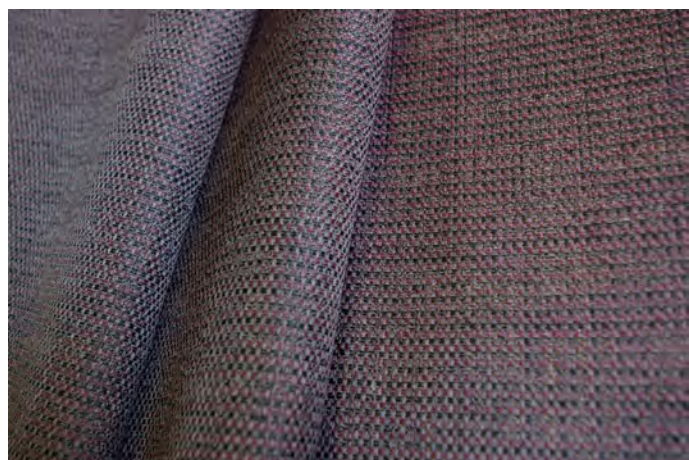

Width	140 cm
Weight	275 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), C1  TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	40000

Pilling DIN EN ISO 12945-2

note 4-5 at 2000 rubs

Care



Care Health & Care









The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

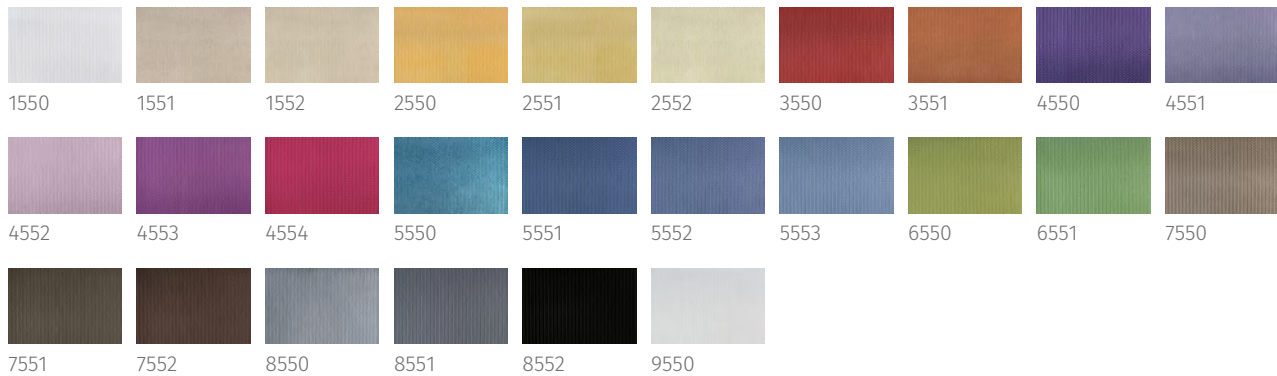

# Alerion DIMOUT

Article Number 26139









Width	150 cm
Weight	295 g/m <sup>2</sup>
Repeat	length approx. 0,5 cm, width approx. 0,5 cm
Composition	100% Polyester FR
Darkening factor	The article stands out due to his significant high darkening effect.
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.
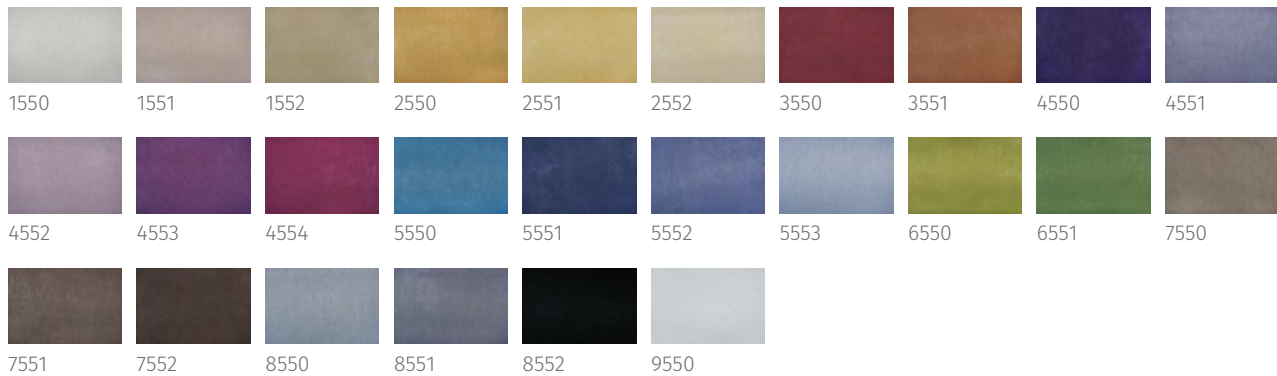
# Alessio DIMOUT

Article Number 29454





Width	150 cm
Weight	295 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester FR
Darkening factor	The article stands out due to his significant high darkening effect.
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

# Alto DELIBLACK

Article Number 36595








Width	280 cm
Weight	450 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	
Care Health & Care	
Other	Nur die unbeschichtete Seite bügeln!

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Antica

Article Number 33013



Width	140 cm
Weight	340 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-3%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    











The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Applause Desiree-Chintz DELILIGHT

Article Number 27856




1520

Width	140 cm
Weight	71 g/m <sup>2</sup>
Repeat	length approx. 300 cm, width approx. 138 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.






The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Applause Opus

Article Number 27845



1521

Width	140 cm
Weight	220 g/m <sup>2</sup>
Repeat	length approx. 300 cm, width approx. 138 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4-5
Care	    



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Arosa DIMOUT

Article Number 37306



1520      3520      5520      6520      8520


Width	140 cm
Weight	260 g/m <sup>2</sup>
Repeat	length approx. 66,5 cm, width approx. 68,5 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	
Care Health & Care	






The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.



## Asmera

Article Number 36686










Width	140 cm
Weight	270 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/- 1%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.
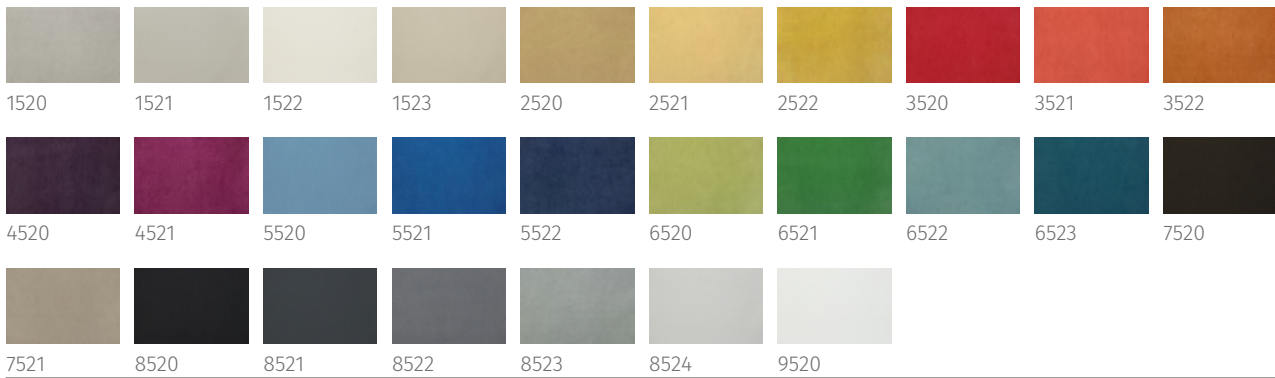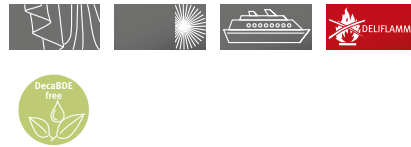
# Astra DELIBLACK

Article Number 37394





Width	140 cm
Weight	300 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    
Other	Nur die unbeschichtete Seite bügeln!

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

# Astra 280 DELIBLACK

Article Number 37408

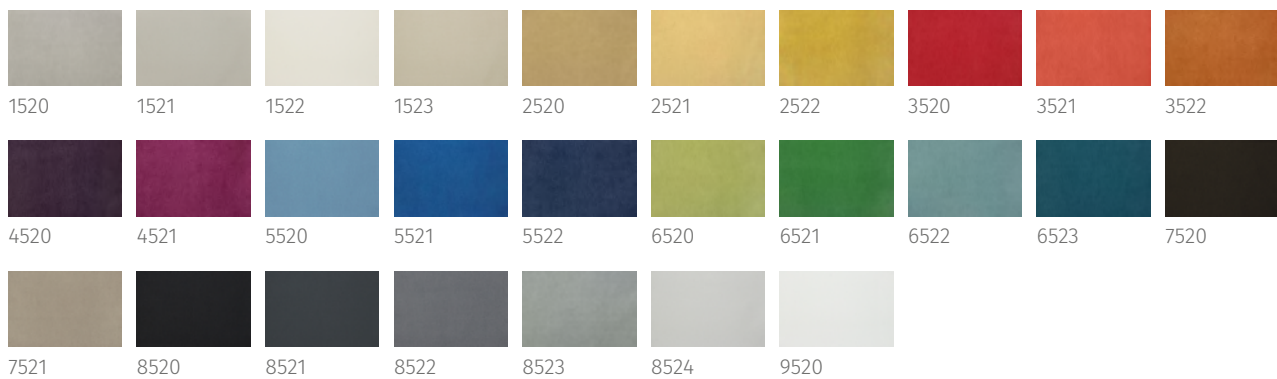







Width	280 cm
Weight	300 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773
Light fastness	4
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.
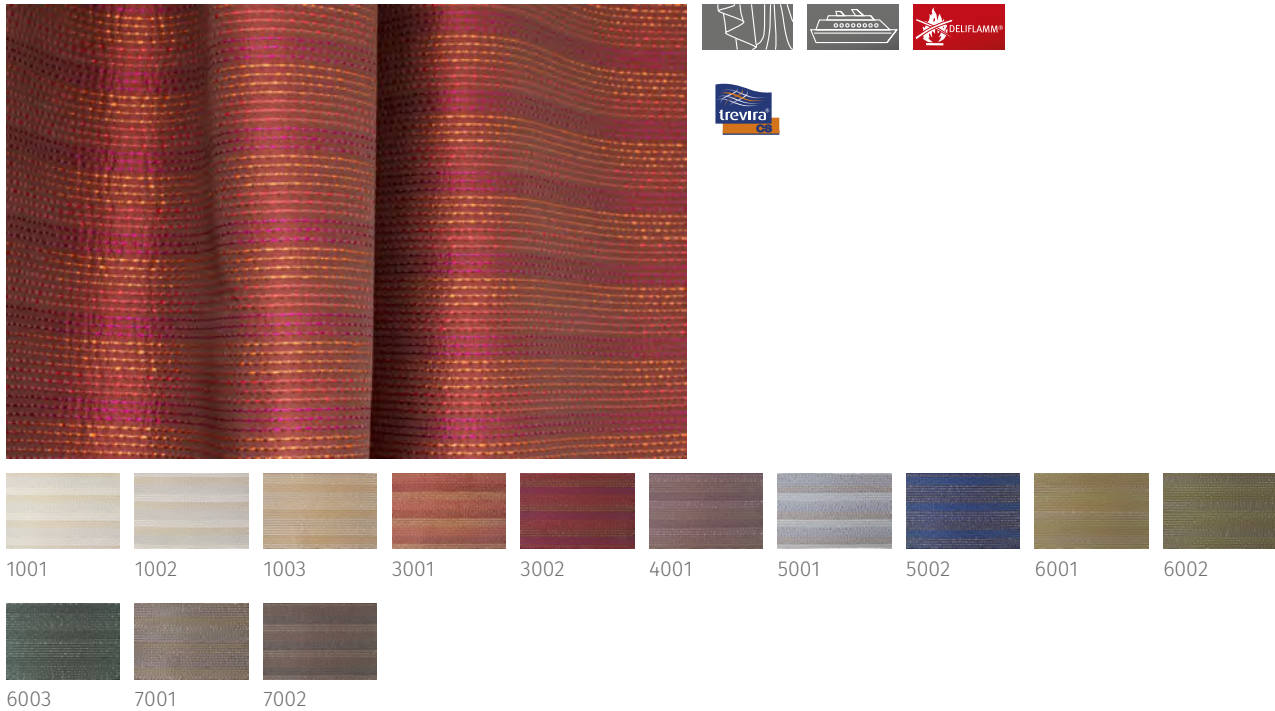
## Ava

Article Number 36507



Width	145 cm
Weight	220 g/m <sup>2</sup>
Repeat	length approx. 5 cm, width approx. - cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Balea DELIBLACK

Article Number 36052



Width	140 cm
Weight	295 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773

Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 2%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5

Care 

Care Health & Care 

Other

Nur die unbeschichtete Seite bügeln!


The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Barcley DIMOUT



Article Number 33090



1520 2520 2521 3520 4520 4521 5520 5521 6520 7520



8520 8521

Width	140 cm
Weight	260 g/m <sup>2</sup>
Repeat	length approx. 56 cm, width approx. 46 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 2%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	
Care Health & Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.




## Black-Lining DELIBLACK

Article Number 36799



0000

Width	138 cm
Weight	260 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	6-7
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	






The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

## Black 280-Lining DELIBLACK

Article Number 36802



0000

Width	280 cm
Weight	260 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	6-7
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.