


Manchester

Article Number 32470

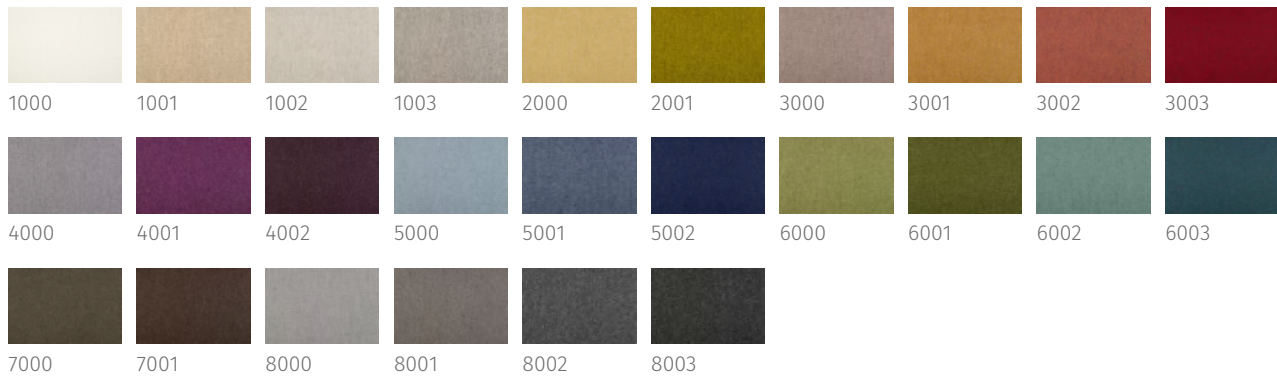

Width	155 cm
Weight	390 g/m ²
Repeat	no repeat
Composition	100% Wolle
Flame resistance	DIN 4102/B2, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-5%, weft approx. +/- 2 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	30000
Pilling DIN EN ISO 12945-2	note 3 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.85

Sound absorption class

B

Care





The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Maria DIMOUT

Article Number 37292




1520 3520 5520 6520 8520






Width	140 cm
Weight	260 g/m ²
Repeat	length approx. 57 cm, width approx. 29,5 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	
Care Health & Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

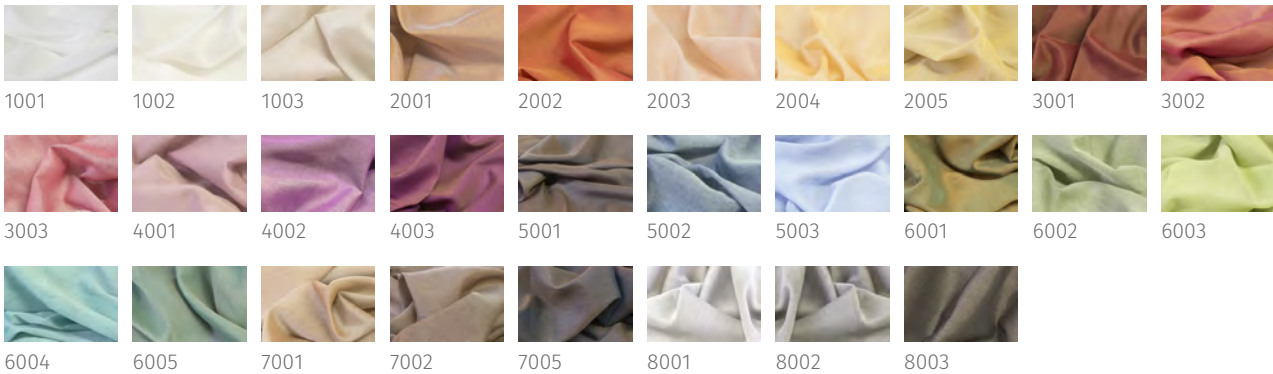Maris DELILIGHT

Article Number 36937



Width	300 cm
Weight	90 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 C1 ,
Light fastness	6-7
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 5
Care	    

Care Health & Care




Other


Supplied with lead possible with a surcharge.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Melina

Article Number 24359

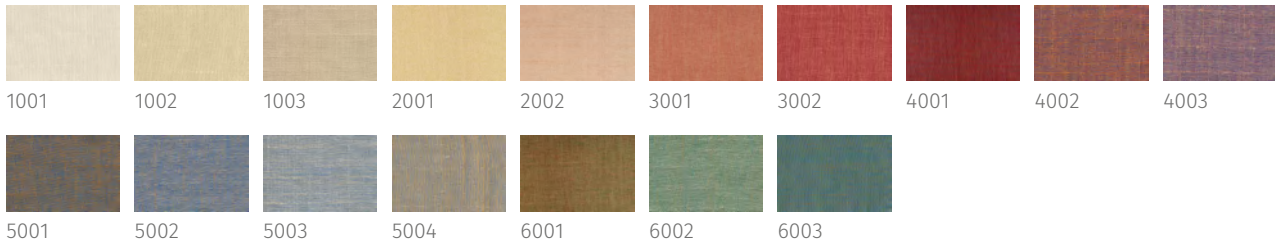


Width	140 cm
Weight	155 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Mila

Article Number 28699

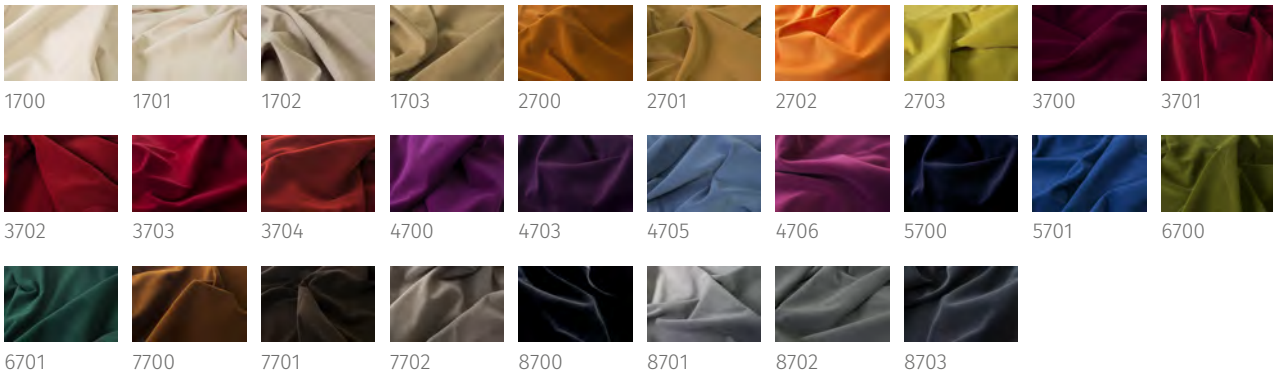

Width	140 cm
Weight	380 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP C, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), EN 13773 C1 , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	100000
Pilling DIN EN ISO 12945-2	note 4-5 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.75

Sound absorption class

C

Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Mina DELILIGHT











Article Number 37598



1001



9001

Width	300 cm
Weight	47 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.











Minerva DELILIGHT

Article Number 36609



9100



9150

Width	300 cm
Weight	45 g/m ²
Repeat	no repeat
Flame resistance	DIN 4102/B1, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Mingo DIMOUT

Article Number 34181

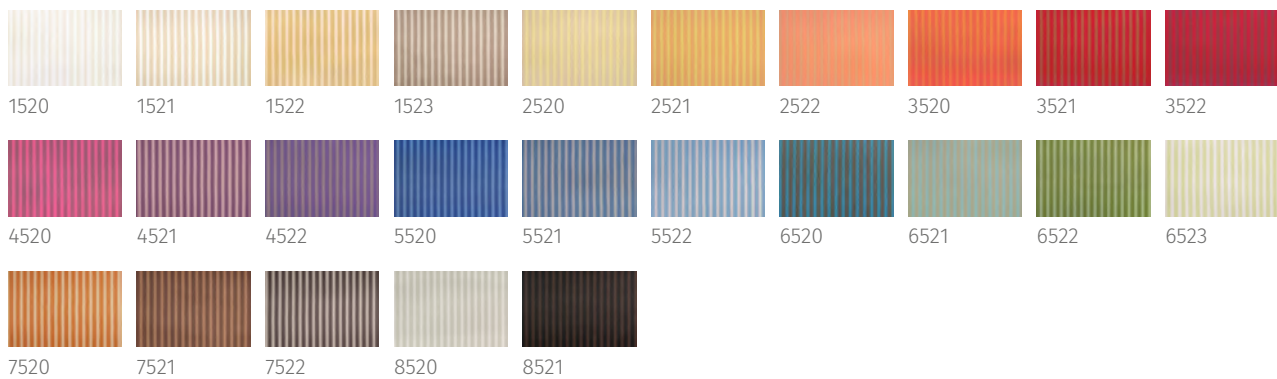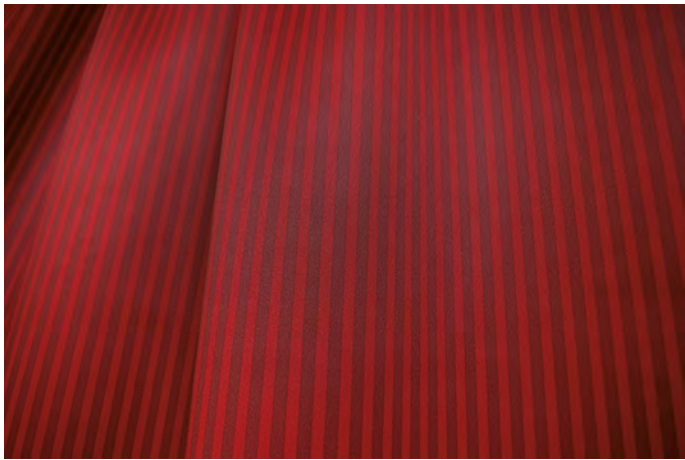

Width	150 cm
Weight	260 g/m ²
Repeat	length approx. - cm, width approx. 1,2 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C

Care





Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Mio DIMOUT

Article Number 32721

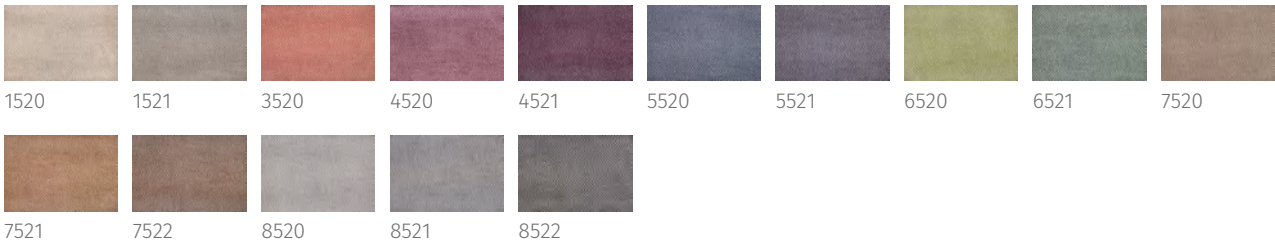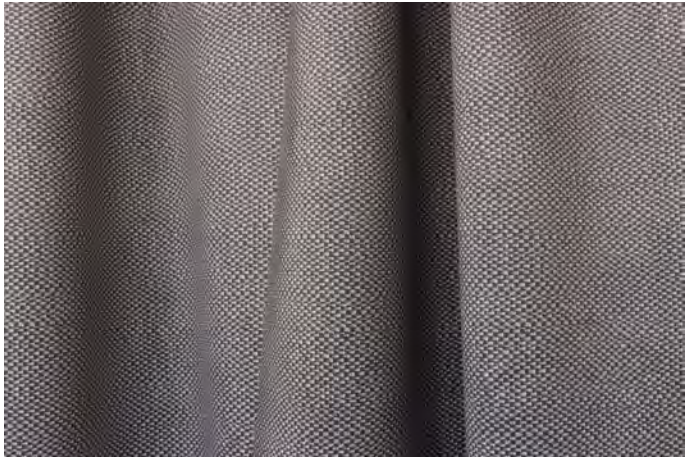

Width	140 cm
Weight	260 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	    


Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Miro

Article Number 38670

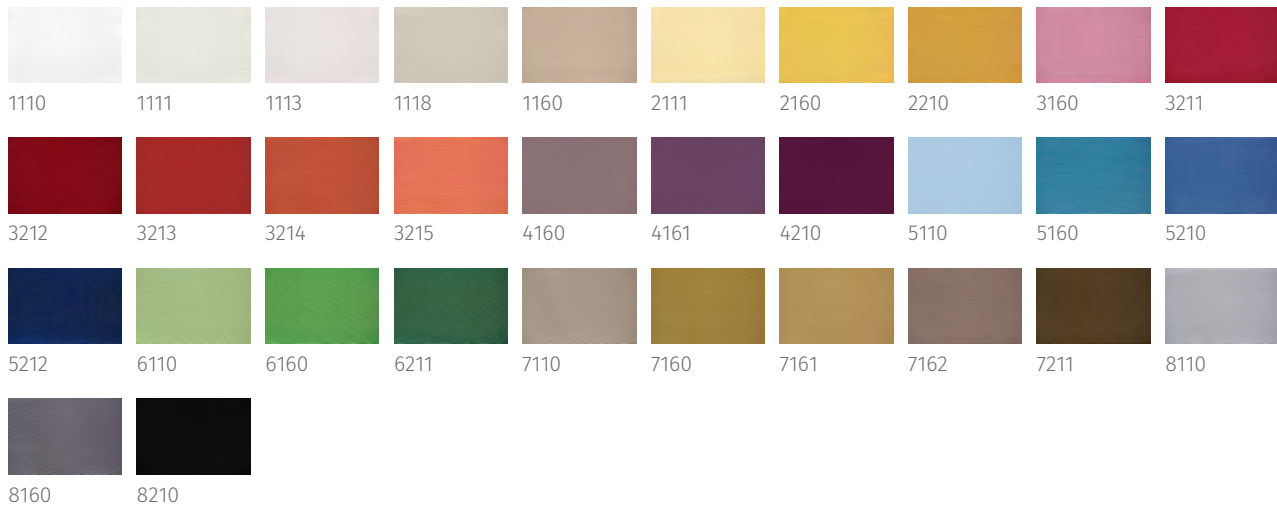



Width	140 cm
Weight	165 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Modena

Article Number 33432

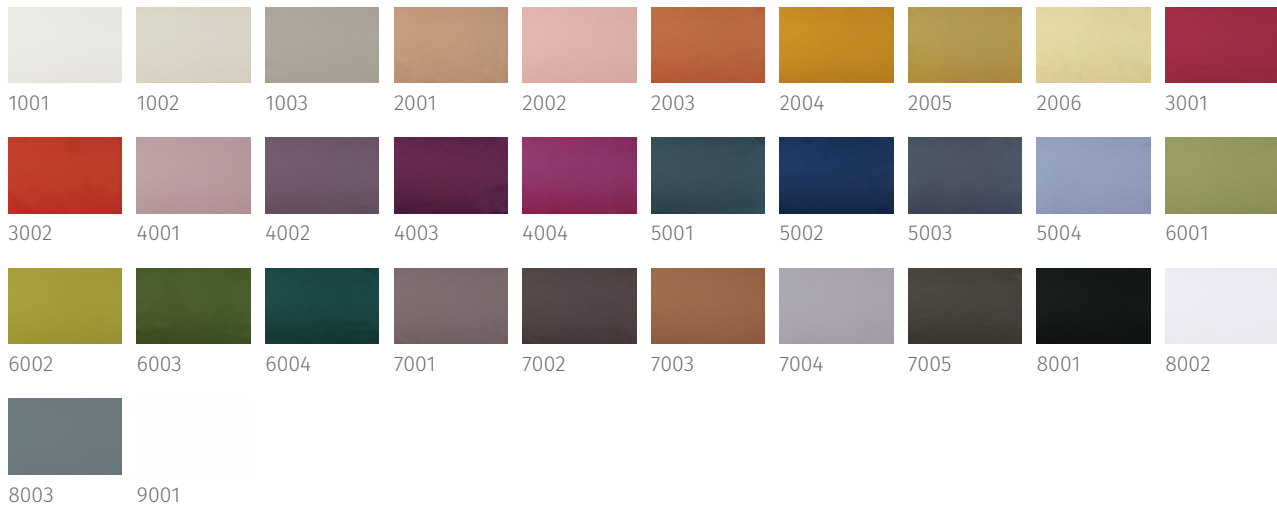






Width	320 cm
Weight	110 g/m ²
Repeat	no repeat
Composition	52% Polyester Trevira CS / 48% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	4
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Moon DELIBLACK

Article Number 34603



Width	300 cm
Weight	330 - 430 g/m ²
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 C1,
Light fastness	6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 5
Care	    
Other	Nur die unbeschichtete Seite bügeln!











The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Muto DIMOUT

Article Number 32754



1520 1521 3520 5520 6520 8520

Width	140 cm
Weight	260 g/m ²
Repeat	length approx. 46 cm, width approx. 69 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	    
Care Health & Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Nel DELILIGHT











Article Number 37237



1001

8001


9001

Width	310 cm
Weight	45 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 5
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Nova

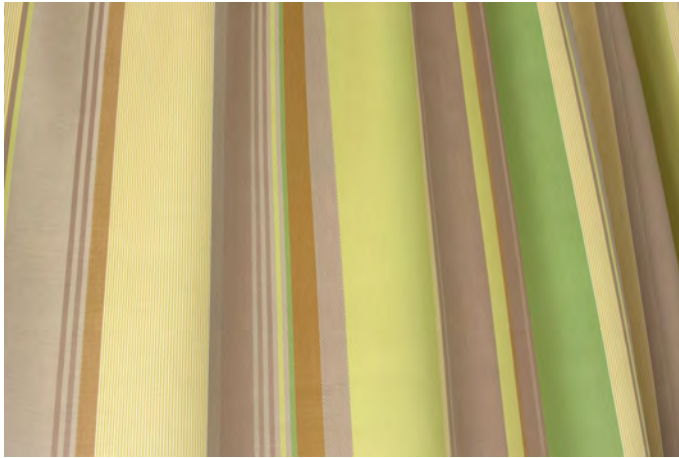Article Number 29840




1001 2001 3001 5001 6001

Width	140 cm
Weight	235 g/m ²
Repeat	length approx. - cm, width approx. 67,5 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773
Light fastness	6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	
Care Health & Care	


The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Octa

Article Number 36493





1630






Width	140 cm
Weight	250 g/m ²
Repeat	length approx. 109 cm, width approx. 69 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP C, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), EN 13773 , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	4
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	40000
Pilling DIN EN ISO 12945-2	note 4 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.7
Sound absorption class	C
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

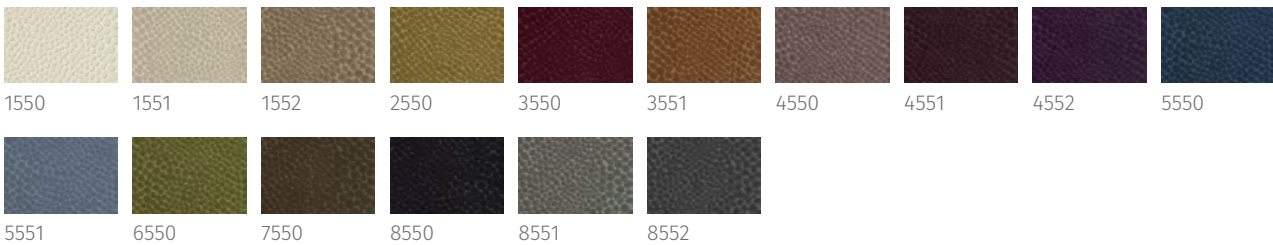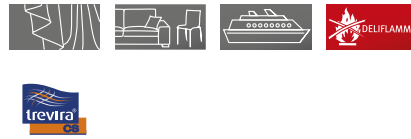Odetta

Article Number 48674



Width	140 cm
Weight	390 g/m ²
Repeat	length approx. 35 cm, width approx. 35 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP C, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), 1-M, EN 13773 , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	40000
Pilling DIN EN ISO 12945-2	note 4-5 at 2000 rubs
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Ombra DELILIGHT

Article Number 32459



1001



1002



2001













3001



8001





8002

Width	300 cm
Weight	30 g/m ²
Repeat	length approx. - cm, width approx. 12,5 cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.


The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Orbit DELIBLACK

Article Number 48947

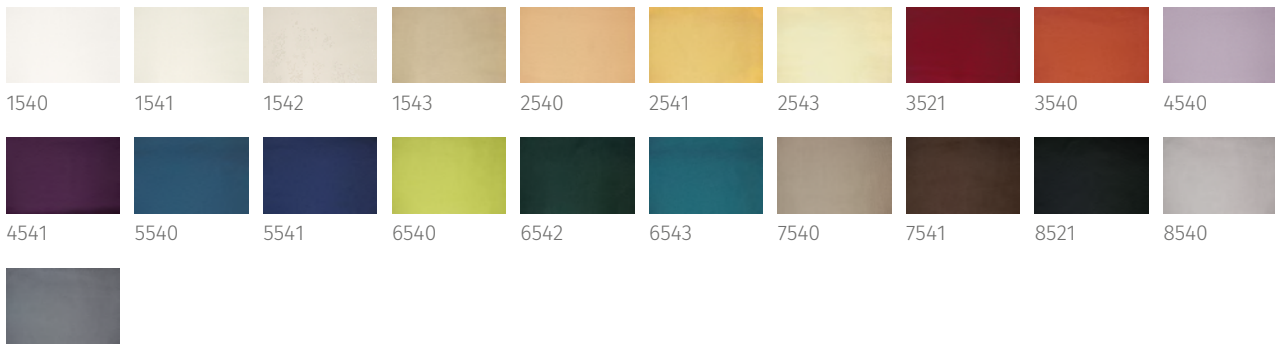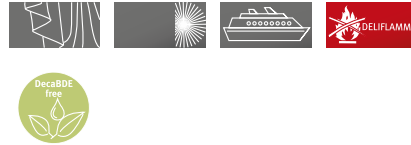


8541






Width	280 cm
Weight	270 g/m ²
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Darkening factor	100 %
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773
Light fastness	3-4
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	
Other	Nur die unbeschichtete Seite bügeln!

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Ovida

Article Number 29625




Width	140 cm
Weight	310 g/m ²
Repeat	length approx. 11 cm, width approx. 7 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Oxford

Article Number 26944

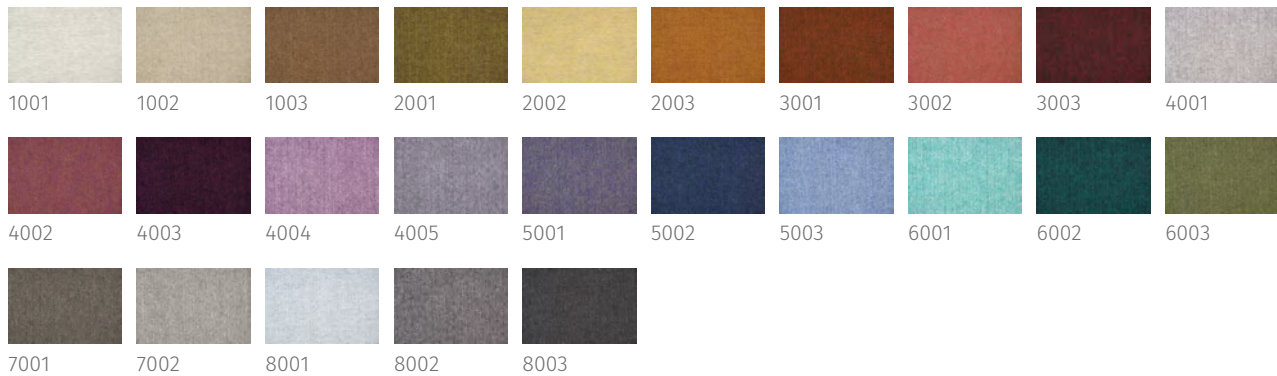

Width	150 cm
Weight	390 g/m ²
Repeat	no repeat
Composition	100% Wolle
Flame resistance	DIN 4102/B2, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5867 TYP B, IMO Res. A471 (XII), IMO Res. A652 (16), , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 30°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-3%, weft approx. +/-1,5 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	30000
Pilling DIN EN ISO 12945-2	note 2-3 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.85

Sound absorption class

B


Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Palas

Article Number 36584

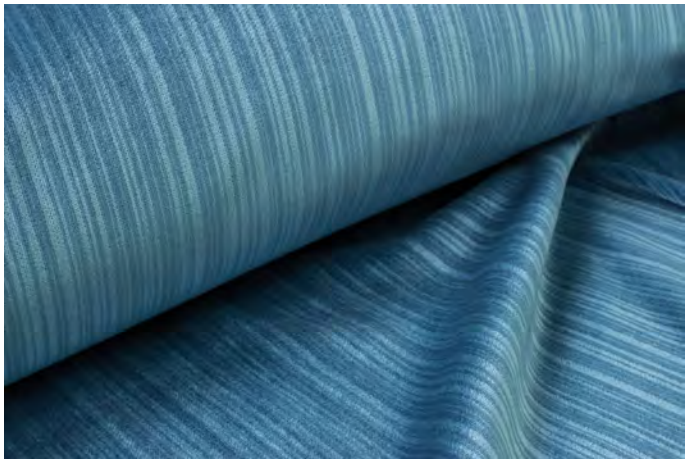

Width	145 cm
Weight	520 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), EN 13773 , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	40000
Pilling DIN EN ISO 12945-2	note 4-5 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.75

Sound absorption class

C

Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.