

Pale

Article Number 33975



1001 1003 2001 2002 3001 3002 4002 5002 6001 6002



6004 7002 8001 8002

Width	140 cm
Weight	280 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/- 3%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Parevo DIMOUT

Article Number 26977



Width	155 cm
Weight	382 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Darkening factor	The article stands out due to his significant high darkening effect.
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-2%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.85
Sound absorption class	B
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Paulette DIMOUT

Article Number 28382



Width	140 cm
Weight	260 g/m ²
Repeat	length approx. 24 cm, width approx. 53 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 C1 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. -1,5%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C

Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Phoenix DELIBLACK

Article Number 32583



Width	280 cm
Weight	441 g/m ²
Repeat	no repeat
Composition	100% Polyester Acrylat Softbeschichtung
Flame resistance	DIN 4102/B1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1%
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Pina

Article Number 27539




Width	140 cm
Weight	245 g/m ²
Repeat	length approx. 7,5 cm, width approx. 3 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4-5
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Pinto

Article Number 37565

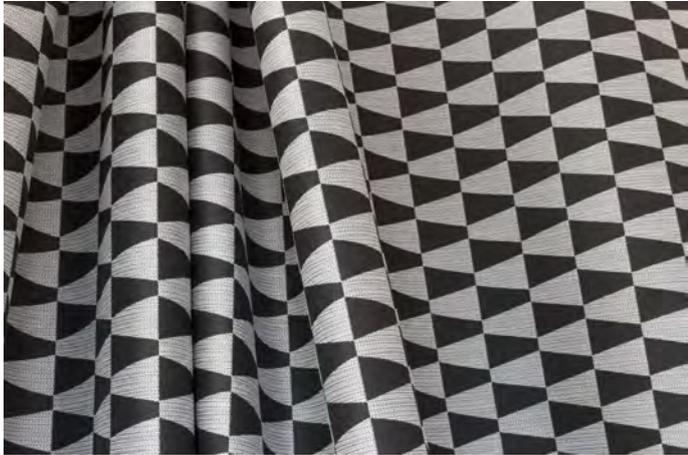

1000 4000 5000 6000 7000 8000 8001

Width	140 cm
Weight	242 g/m ²
Repeat	length approx. 4,2 cm, width approx. 9 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), EN 13773 , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	25000
Pilling DIN EN ISO 12945-2	note 3-4 at 2000 rubs
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Platus

Article Number 27685



Width	150 cm
Weight	240 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, IMO Res. A471 (XII), , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %

Rub fastness DIN EN ISO 105-X12

dry: note 4-5, wet: note 4-5

Abrasion to Martindale DIN EN ISO 12947-2
DIN EN 14465-2006 40000

Pilling DIN EN ISO 12945-2

note 3-4 at 2000 rubs

Care



Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Platus 300

Article Number 26015



Width	300 cm
Weight	240 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, IMO Res. A471 (XII), , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %

Rub fastness DIN EN ISO 105-X12

dry: note 4-5, wet: note 4-5

Abrasion to Martindale DIN EN ISO 12947-2
DIN EN 14465-2006

40000

Pilling DIN EN ISO 12945-2

note 3-4 at 2000 rubs

Care



Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Ponti

Article Number 32765




Width	140 cm
Weight	385 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867 TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), EN 13773 , TRANSLATE EN: Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-2 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4, wet: note 4
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	30000
Pilling DIN EN ISO 12945-2	note 4 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.75
Sound absorption class	C
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Prelude

Article Number 34396

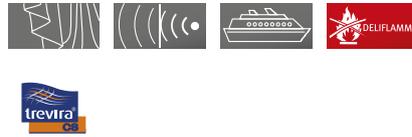

9110

Width	140 cm
Weight	185 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 C1 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.7
Sound absorption class	C
Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Primus DIMOUT

Article Number 28134



Width	150 cm
Weight	260 g/m ²
Repeat	length approx. - cm, width approx. 5 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 C1 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1,5%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C

Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Raiku DIMOUT

Article Number 32743



3520 5520 6520 8520 8521

Width	140 cm
Weight	260 g/m ²
Repeat	length approx. 32 cm, width approx. 17,25 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	    
Care Health & Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Resi DIMOUT

Article Number 37317




1520 3520 5520 6520 8520

Width	140 cm
Weight	260 g/m ²
Repeat	length approx. 66,5 cm, width approx. 68,5 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	
Care Health & Care	

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Rob

Article Number 32914



1118 2170 4160 6112 7167 8110 8111 9110

Width	150 cm
Working width	Nutzbreite 148 cm cm
Weight	106 g/m ²
Repeat	length approx. 43 cm, width approx. 16,5 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 4-5
Pilling DIN EN ISO 12945-2	note 4 at 2000 rubs
Care	
Care Health & Care	
Other	Auch in allen übrigen Farben des Artikel Target 24188 erhältlich ab einer Mindestbestellmenge von 120 lfm pro Farbe.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods.

Warranties are not given.

Robin DELILIGHT

Article Number 32517



2520

4520

6520

7520

Width	295 cm
Working width	Nutzbreite 272 cm cm
Weight	70 g/m ²
Repeat	length approx. 68 cm, width approx. - cm
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    
Care Health & Care	    
Other	Nur ohne Bleiband lieferbar.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Roxy

Article Number 32903



1118 2170 4610 6112 7167 8110 8111 9110

Width	150 cm
Working width	Nutzbreite 144 cm cm
Weight	106 g/m ²
Repeat	length approx. 12,5 cm, width approx. 4,8 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 4-5
Pilling DIN EN ISO 12945-2	note 4 at 2000 rubs
Care	
Care Health & Care	
Other	Auch in allen übrigen Farben des Artikel Target 24188 erhältlich ab einer Mindestbestellmenge von 120 lfm pro Farbe.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods.

Warranties are not given.

Ruby

Article Number 32936



1118 2170 4160 6112 7167 8110 8111 9110

Width	150 cm
Working width	Nutzbreite 148 cm cm
Weight	106 g/m ²
Repeat	length approx. 53,5 cm, width approx. 74 cm
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 5, wet: note 4-5
Pilling DIN EN ISO 12945-2	note 4 at 2000 rubs
Care	
Care Health & Care	
Other	Auch in allen übrigen Farben des Artikel Target 24188 erhältlich ab einer Mindestbestellmenge von 120 lfm pro Farbe.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods.

Warranties are not given.

Saba

Article Number 36857



Width	140 cm
Weight	270 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Sam DELILIGHT

Article Number 37168



1001



8001



8002



9001

Width	290 cm
Weight	95 g/m ²
Repeat	no repeat
Composition	100% Polyester Trevira CS
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Care	    
Care Health & Care	    
Other	Nur ohne Bleiband lieferbar.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Scott DIMOUT

Article Number 37510



9550

Width	148 cm
Weight	283 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-2 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 3-4, wet: note 4-5
Care	    

Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Selma DIMOUT

Article Number 33859



1520 1521 1522 2520 3520 3521 3522 4520 5522 6520



6521 7521 7522 8520 8521 8522

Width	140 cm
Weight	260 g/m ²
Repeat	length approx. 13 cm, width approx. 17 cm
Composition	100% Polyester FR
Darkening factor	approx. 99 %
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP-B + TYP-C, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/- 1%, weft approx. +/- 1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/- 1%, weft approx. +/- 1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C

Care



Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.

Silk DELILIGHT

Article Number 39039



1110

9100

Width	300 cm
Working width	auch in 360 cm und 423 cm Warenbreite erhältlich cm
Weight	70 g/m ²
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, M1, BS 5867 TYP B, IMO Res. A471 (XII), EN 13773 ,
Light fastness	4-5
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Care	    
Care Health & Care	    
Other	Supplied with lead possible with a surcharge.

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.