GSLENERGY

POWER Inverters GSL-H-12KLV-US



www.gsl-energy.com

GSL ENERGY

- +0755-84515360
- sales@gsl-energy.com
- (k) www.gsl-energy.com

Hybrid Series High Performace Inverter

GSL ENERGY has gone Above and Beyond to bring you the best technologies available to meet the ever changing demands of the renewable energy market. The New Hybrid Series High Performance Inverter delivers exceptional performance and unsurpassed quality in a All-In-One Solution for all your Energy needs.

Model GSL-H-12KLV-US

AC 220V Single Phase, 120/240V Split Phase, 120/208V Three Phase,

12kW EPS Output

10 Units Paralleling

AC Coupling Function

3 MPPT Input for max input 18kW

Separated Generator Input

200A AC Passthrough Current

Peak Shaving Function

5in Color LCD, Touch Screen

10 Years Long Term Warranty



Applications

Solar Renewable Energy

Back-Up Energy Systems

Home, Office and Trailer

Multiple Protection Management System

Other electric applications with high energy requirements







area

Villa

Communication base station





Household




Farm

Field power supply

pon

Hybrid GSL-H-12KLV-US High Performance Inverter

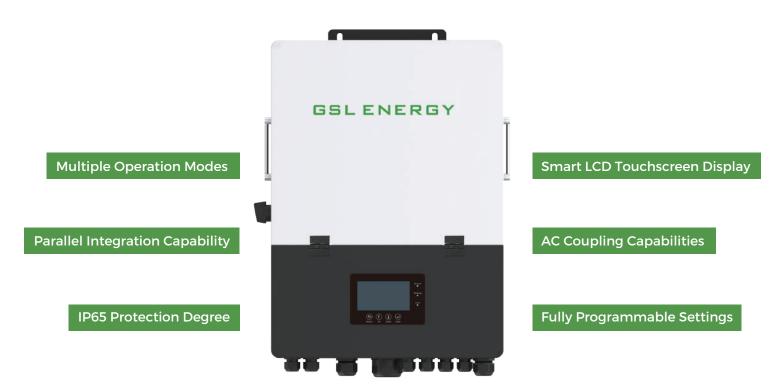

UNPARALLEL SAFETY

The GSL Hybrid Series Inverter includes a complete intelligent and comprehensive Management Energy System for multiple connections with abundant safety features such as PV Arc Faut Detection, PV Input Lightning Protection, Output Over Current Protection among many other safety protection protocols.



LONG LIFE DESIGN

The GSL Hybrid Series has been developed to withstand the harsh conditions of today's weather and temperatures with an IP65 protection rating making the unit the best of its kind. Our quality assurance is backed up by a 5 year warranty.



UNSURPASSED PERFORMANCE

Our Hybrid Series Inverter is designed to excel in every application. With up to 190A continuous discharge current, rest assured the GSL Hybrid Inverter will deliver the energy you need when you need every time.



UN MATCHED RELIABILITY

Every GSL Energy product is born from meticulous research and development and is then subjected to rigorous testing. The Nexen Hybrid Series is no exception, offering you total versatility without sacrificing maximum performance and reliability.



EASY INSTALLATION


The GSL Hybrid Series Inverter can work as a stand-alone unit or it can be mounted as a wall accessory for that sleek compact design that not only saves you space, but will definitely improve the looks of you renewable or backup system.


Hybrid Key Features

- 120V/240V Split phase Pure Sine Wave
- Self-consumption and feed-in to the grid.
- Auto restart while AC is recovering.
- Programmable supply priority for battery or grid.
- Multiple operation modes:On grid,off grid and UPS.
- Configurable battery charging current/voltage settings
- Configurable AC/Solar/Generator Charger Settings
- WIFI monitor Support Monitor System and Cloud Connect


- Voltage Compatibility
- Multiple Stages Protection
- Smart Battery Charger Design
- Limit Prevent Function Overflow
- Bulit-In 3 strings of MPP trackers
- Smart MPPT Charging System
- Time of use function.
- Smart Load Function.

Hybrid 5.0 inch Big Touchscreen LCD Display

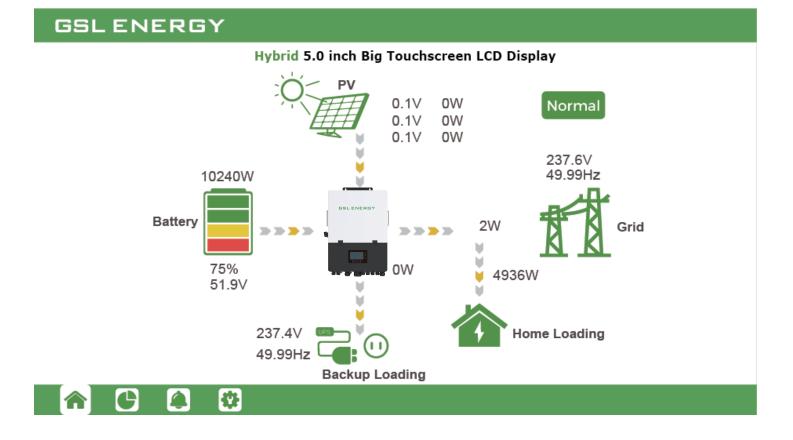


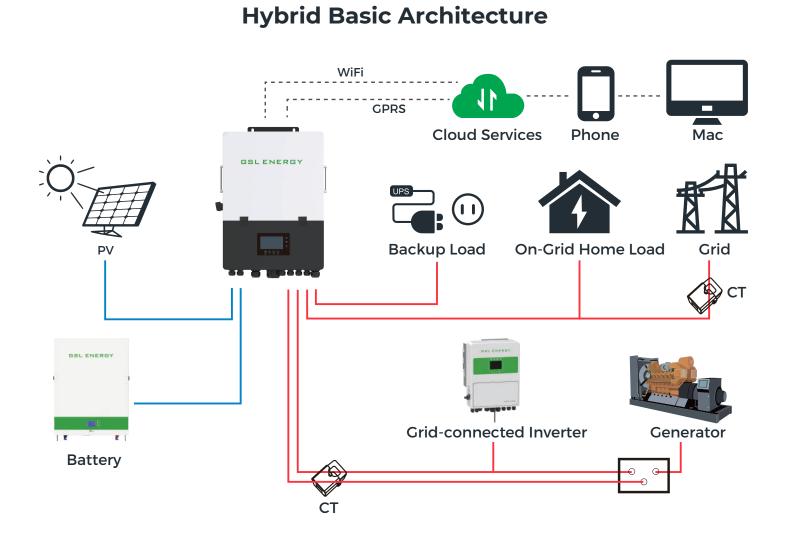


1. Solar and battery storage system

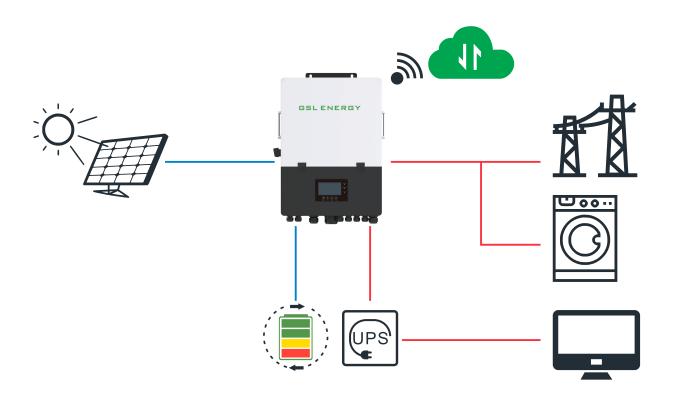


2. AC Coupling with existed solar system

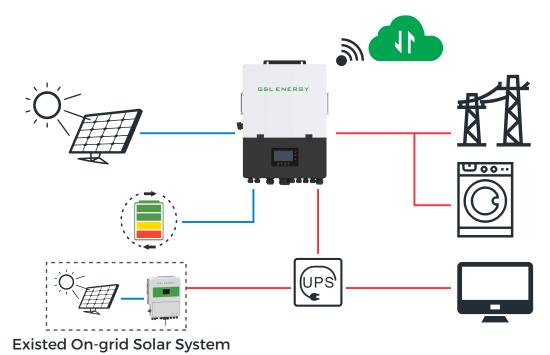


3. On-grid solar system without battery (Support EPS even without battery)

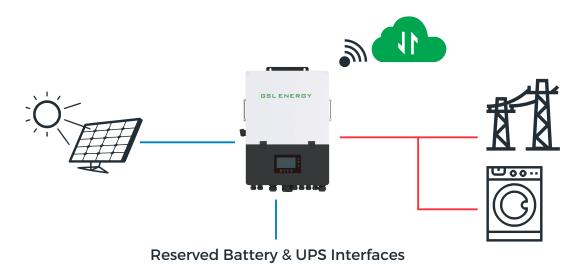


4. Off-grid and back-up applications

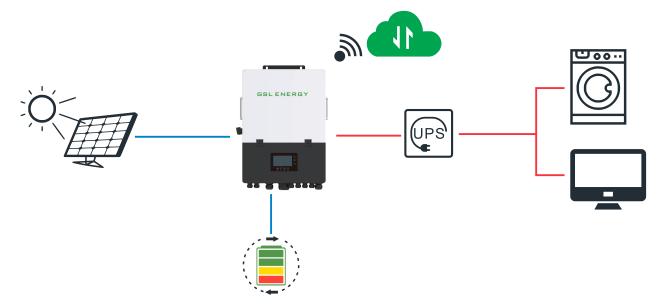

5. Single and three phase paralleling system

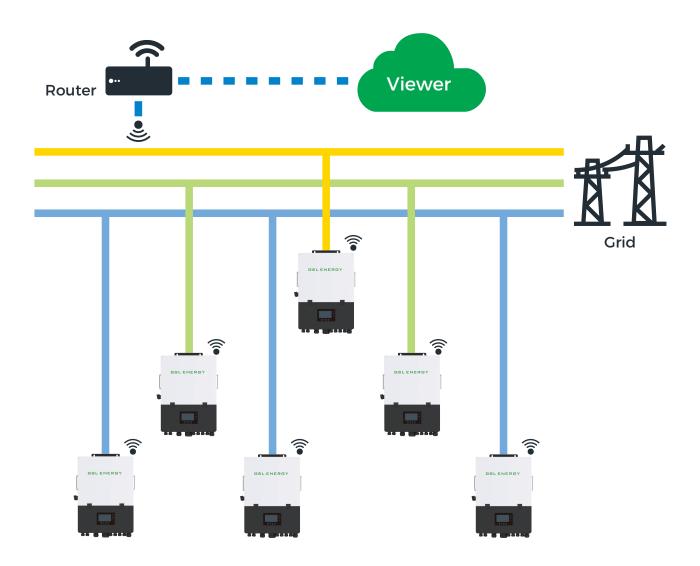

6. Energy storage system with peak shaving Function

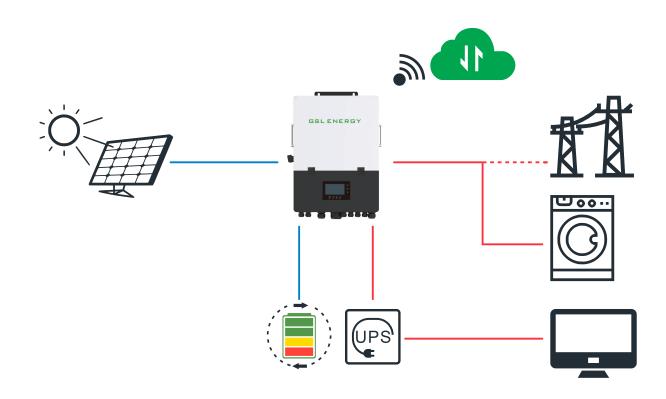

Specification

Specification	
Battery Parameters	GSL-H-12KLV-US
Compatible Battery Type	Lead-acid/Lithium
Nominal Battery Voltage	48V
Battery Voltage Range	40V~60V
Maximun Charging/Discharging Current	250A/250A
Maximun Charging/Discharging Power	12000W
Maximun charging/Discharging rower	12000#
Input DC (PV Side)	
Max. DC Input Power for Single MPPT	12000W/7000W
Max. PV Input Power	18000W
DC Input Voltage Range	100V~600V
Nominal DC Input Voltage	360V
Full Power MPPT Voltage Range	230 [~] 500V
Max. DC Input Current	25A/15A/15A
MPPT Number/(Strings per MPPT)	3 (2/1/1)
Output/Inout AC (Grid)	
Nominal Power	12000W
Nominal AC Voltage	AC 220V Single Phase, 120/240V Split Phase,
	120/208V Three Phase
Operating Voltage Range	180V [~] 270V
Max. Continuous AC Current	50A@240V, 50A@208V
Nominal AC Frequency	50Hz/60Hz
UPS Output-with Battery	
UPS Max. Output Power	12000W
UPS Nominal Output Voltage	AC 220V Single Phase, 120/240V Split Phase,
	120/208V Three Phase
UPS Nominal Output Frequency	120V/240V, 120V/208V
UPS Nominal Output Current	50Hz/60Hz
Peak Power	50A@240V, 57.7A@208V
	50A@240V, 57.7A@208V 14kW 10minutes / 16kW 5minutes / 20kW 500ms
Peak Power Switching Time	
Switching Time	14kW 10minutes / 16kW 5minutes / 20kW 500ms
Switching Time Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms
Switching Time Efficiency MPPT Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9%
Switching Time Efficiency MPPT Efficiency Max. Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5%
Switching Time Efficiency Max. Efficiency EU Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5%
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95%
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5%
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95%
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Protection	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95%
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Anti-islanding Protection	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5%
Switching Time Efficiency MAX. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% YES
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Mattery Discharging Efficiency Drotection Anti-islanding Protection DC Switch Ingress Protect Degree	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Mattery Discharging Efficiency Drotection DC Switch Ingress Protect Degree SPD Protection	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 95% 94.5% YES YES YES IP65
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Protection Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES YES IP65 YES
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Protection Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES IP65 YES OPT
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Ceneral Data	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES IP65 YES OPT OPT
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Protection Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Ceneral Data	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES YES IP65 YES IP65 YES OPT OPT OPT
Switching Time Efficiency MPPT Efficiency Max. Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Ceneral Data	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES YES IP65 YES IP65 YES OPT OPT OPT 670*490*265 42kg
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Dimension (mm) Weight Display	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% YES YES YES IP65 YES IP65 YES OPT OPT OPT 670*490*265 42kg Color LCD
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Dimension (mm) Weight Display	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% YES YES YES YES IP65 YES OPT OPT OPT 670*490*265 42kg Color LCD Transformer-less
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Ceneral Data Dimension (mm) Weight Display Topology	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% YES YES YES IP65 YES IP65 YES OPT OPT OPT 670*490*265 42kg Color LCD
Switching Time Efficiency MPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Dimension (mm) Weight Display Topology Ambient Temperature Range	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 95% 95% 94.5% YES YES YES YES YES IP65 YES OPT OPT OPT 670*490*265 42kg Color LCD Transformer-less
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Ceneral Data Dimension (mm) Weight Display Topology	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES IP65 YES OPT OPT OPT OPT COT Cotor LCD Transformer-less -25~60 C
Switching Time	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% 94.5% YES YES IP65 YES OPT OPT OPT OPT 670*490*265 42kg Color LCD Transformer-less -25~60 C FAN
Switching Time Efficiency MPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Deneral Data Dimension (mm) Weight Display Copology Ambient Temperature Range Cooling Communication	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% YES YES IP65 YES OPT OPT OPT OPT OPT 670*490*265 42kg Color LCD Transformer-less -25~60 °C FAN RS485/Wi-Fi/CAN
Switching Time Efficiency Max. Efficiency Battery Charging Efficiency Battery Discharging Efficiency Battery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI RSD Ceneral Data Dimension (mm) Weight Display Topology Ambient Temperature Range Cooling Communication	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% VES VES VES VES IP65 YES OPT OPT OPT 670*490*265 42kg Color LCD Transformer-less -25~60 C FAN RS485/Wi-Fi/CAN LEEE1547, FCC, SDOC
Switching Time Efficiency MPPT Efficiency Max. Efficiency EU Efficiency Battery Charging Efficiency Battery Discharging Efficiency Attri-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI SPD Protection AFCI Binension(mm) Weight Display Copology Ambient Temperature Range Cooling Communication EXC Standard & Certification	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms
Switching Time Efficiency Max. Efficiency EU Efficiency Editery Charging Efficiency Eattery Discharging Efficiency Anti-islanding Protection DC Switch Ingress Protect Degree SPD Protection AFCI SD Ceneral Data Dimension (mm) Weight Display Topology Ambient Temperature Range Cooling Conmunication	14kW 10minutes / 16kW 5minutes / 20kW 500ms <20ms 99.9% 97.5% 96.5% 95% 94.5% YES YES IP65 YES OPT OPT 0PT 670*490*265 42kg Color LCD Transformer-less -25~60 °C FAN RS485/Wi-Fi/CAN LEEE1547, FCC, SDOC



GSL ENERGY GREEN SOLUTIONS

ENJOY THE SUNNY SIDE OF OUR SOLUTIONS

SWITCH YOUR ENERGY NEEDS TO EFFICIENT RENEWABLE TECHNOLOGIES.

FROM STORED ENERGY TO ENERGY GENERATION , WE'VE GOT YOU COVERED.



86-755-84515360 🕲

139 2372 0280 🔘

www.gsl-energy.com