

Installation Instructions of Lever




Thank you for purchasing our products. Please review this manual thoroughly before operating your device. All pictures in this manual are for illustration purpose only. Actual product may vary due to product upgrade.

### **Parts list**

**TOOL REQUIRED:** 

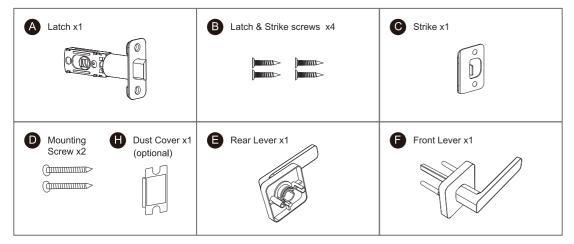

Do not use an electric screwdriver during installation.

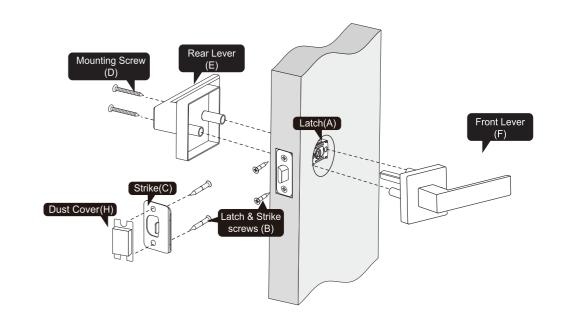

2-3/8" or 2-3/4"

(60 or 70mm)


2-1/8" (54mm) backset

(25mm)


Door thickness:

1-3/8" to 2"


(35mm or 50mm)



If your door already has the holes shown in the picture below, proceed to the next step, if your door does not have holes, use the mounting template to drill a new hole.



## 2. Latch backset adjustment




Backset is the distance from the door edge to the center of the hole in the door.

The latch is provided with adjustable design which can fit either 2-3/8"(60mm) or 2-3/4"(70mm) backset.

A. If the backset of your door is 2-3/8"(60mm), no need to adjust the latch.



**B**. If the backset of your door is 2-3/4"(70mm), please adjust the latch.

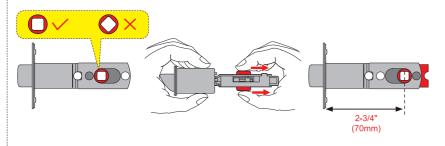

#### 3. Install latch and strike







Make sure the hole in door frame is drilled a minimum of 1" (25mm) deep.

## MPORTANT:

The latch should be aligned with the chiseled properly.

# 4. Install front and rear lever

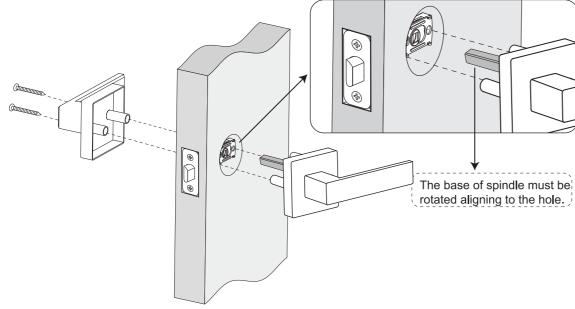

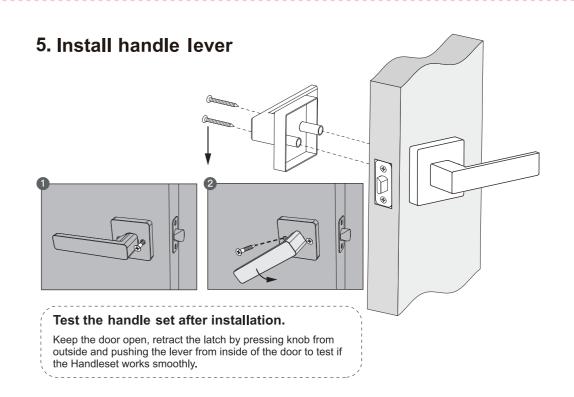

尺	寸:	成品尺寸:165x105mm 展开尺寸:330x210mm
材	质:	128g双铜纸
エ	艺:	四色双面印刷;十字折,先左右对折,再垂直对折
备	注:	红色虚线为折叠线,不需要印刷