

# Window Stays



**Whitco**<sup>®</sup>  
SECURING YOUR HOME™

**10YEAR** MECHANICAL WARRANTY

[whitco.com.au](http://whitco.com.au)

# Standard Narrow Window Stays

## Application/Description


- Robust metal window stays for both casement or awning windows. Available in both Standard (wide) and Narrow track designs for timber or aluminum joinery.
- Friction versions for manually open sashes and Non-friction versions for mechanically operated sashes.
- Standard passivated zinc plated steel and corrosion resistant stainless steel materials are available both with bronze foot

## Features and Specifications

- Robust construction
- Both Standard (wide) & Narrow track designs
- Both Friction and Non-friction versions
- Two materials available:
  - Passivated zinc plated steel
  - Stainless steel
- Bronze metal guide / friction foot
- Suitable for non-lipped window joinery only
- Packed with fastening screws
- Combination Retail/Trade pack
- Made to Whitco specifications
- Use in combination with - Whitco Window winders, Hook hinges, Window Locks & Catches



Aluminium  Timber



## Standard Finishes

Available in two materials/finish:


Passivated zinc plated steel/ Silver finish	01
Stainless steel/Natural finish	04

## Non Standard Finishes

Other finishes are not available.

## Keying

Not keyed

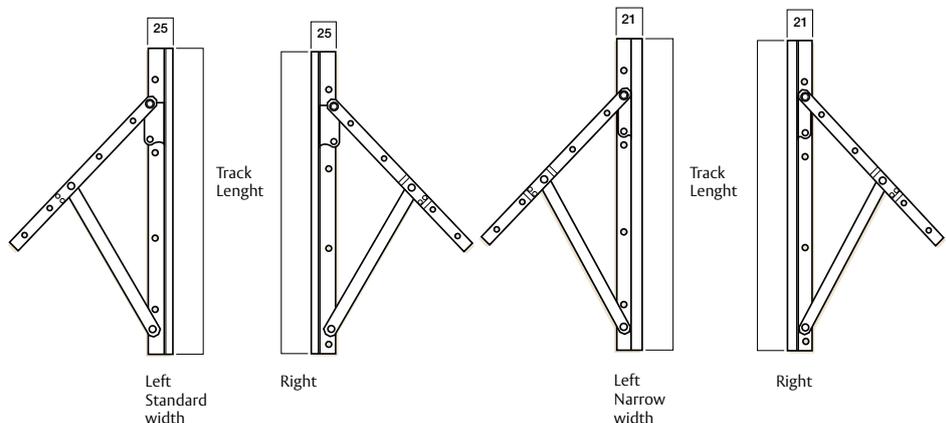

# Standard Narrow Window Stays

## Performance

### Window size and weight guidelines

- Maximum weight of sash 12.3 kg.
- Maximum recommended casement sash height is 1,350 mm and awning width is 900 mm.

### Corrosion

Minimal effect to full exposure to 96 hours Neutral Salt Spray mounted on powder coated Aluminium sill section.

### Weight

Recommended maximum window size & sash weight. Maximum recommended casement sash height is 1,350 mm. Maximum recommended awning sash width is 900 mm.

## Standard width versions

Track length	Casement sash width (mm)	Casement sash weight (Kg)	Awning sash height (mm)	Awning sash weight (Kg)
200 mm	Up to 635	10.0	Up to 535	6.3
300 mm	636 - 790	11.8	536 - 710	7.8
400 mm	791 - 840	12.3	711 - 990	10.0
500 mm	Not recommended		991 - 1,220	11.8

## Narrow width versions

Track length	Casement sash width (mm)	Casement sash weight (Kg)	Awning sash height (mm)	Awning sash weight (Kg)
200 mm	Up to 635	9.5	Up to 535	6.0
300 mm	636 - 790	11.3	536 - 710	7.3
400 mm	791 - 840	11.8	711 - 990	9.5
500 mm	Not recommended		991 - 1,220	11.3

## Ordering

Combination Retail / Trade Packs

Track length	Standard Width	Narrow Width
200 mm	W0103••	W0203••
300 mm	W0107••	W0207••
400 mm	W0111••	W0211••
500 mm	W0115••	W0215••

## Application Information

Standard versions suit a track rebate of 27.0 mm x 9.5 mm with •• mm stay height.  
Narrow versions suit a track rebate of 20.5 mm x 8.0 mm with •• mm stay height.

## Whitco<sup>®</sup>

Whitco protects millions of Australian homes and offers the largest range of security and hardware products for residential doors and windows in Australia. With our proud heritage, and by offering a wide variety of locks at affordable prices, Whitco has become one of Australia's most trusted brands.

The Whitco brand is an integral part of ASSA ABLOY Australia Pty Limited, the market leader in the lock and security products industry in Australia.

## ASSA ABLOY

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.

As the world's leading lock group, ASSA ABLOY offers a more complete product range of door opening solutions than any other company in the market.

**ASSA ABLOY Australia Pty Ltd**  
235 Huntingdale Road  
Oakleigh, Victoria, 3166  
Australia

info.au@assaabloy.com  
assaabloy.com.au

**ASSA ABLOY New Zealand Ltd**  
6 Armstrong Road  
Albany, North Shore City, 0632  
New Zealand

info.nz@assaabloy.com  
assaabloy.co.nz

An ASSA ABLOY Group brand

**Disclaimer**

Whilst every effort has been made to ensure that the information contained in this brochure is accurate at the time of publication, ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") recommends that you consult ASSA ABLOY or its agents prior to placing an order to ascertain current information on specific products, as ASSA ABLOY reserves the right to make any changes without notice. ASSA ABLOY will not be liable for any injury, loss or damage whatsoever, arising from any errors or omissions in the information contained in the brochure or arising from the use or application of the information contained herein.