


MIB Pro 60 Technical Specifications

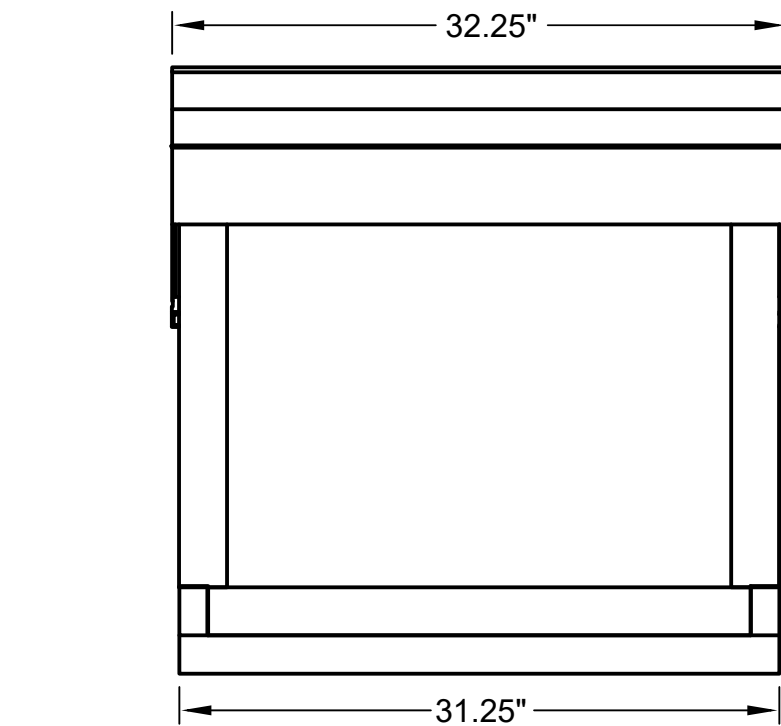

Electrical Data

Voltage: 103-127 volts
 Phase: 1
 Frequency: 60 Hz
 Amperage: 8.5 amps
 GFCI Trip Level: 4mA~6mA UL/CUL Certified
 Temperature control: Inkbird ITC-310

Mechanical Data

Compressor: Tecumseh AE4450Y-AA1A
 Operating temperature: 0-115 F
 Refrigerant/Charge: R134a/12.1oz
 Cooling Capacity: 6000 BTU/hr
 Insulation rating: R9
 Winterization Protection: 0 F

Exterior Dimensions & Protection

Weight with lid (empty): 277 lbs
 Weight with lid (filled 60 gal): 777 lbs
 Length: 81.88 in.
 Width: 32.25 in.
 Height with lid: 31.25 in.
 Tub: 16 gauge 304 Stainless Steel
 Floor skids: non marking composite plastic
 Wood finish: exterior grade plyw with UV protection

Water Treatment

Filtration Pump: Intex C1000
 Mechanical Filter: Intex Type A (#29000E)
 Mechanical Filtration: 50 microns
 Ozone Generator: Del Ozone O3 Series UO3
 Ozone Injection rate: 50 mg/hr nominal
 Filtration Flow rate: ≤ 240 GPH
 Tub capacity: 60 gal

info@morozkoforge.com
 Morozko Forge
 7150 W. Roosevelt Rd. A-161
 Phoenix, AZ 85043