



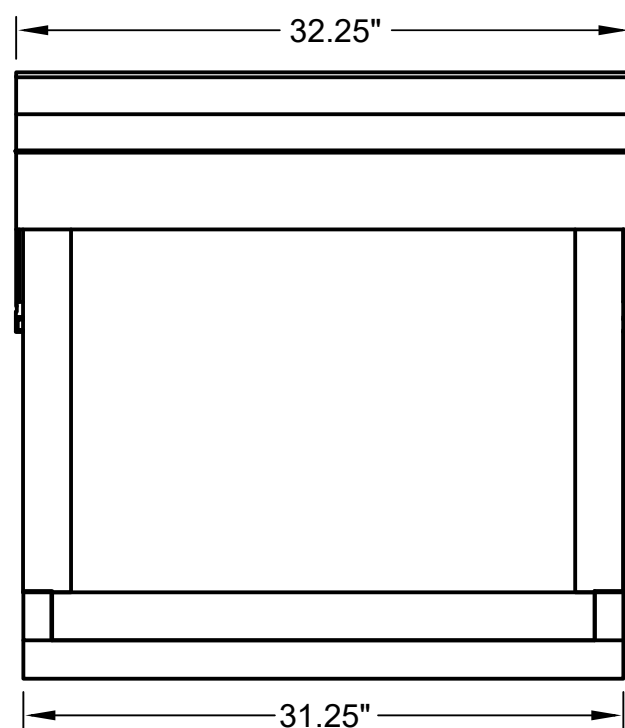

MIB Pro 66 Technical Specifications

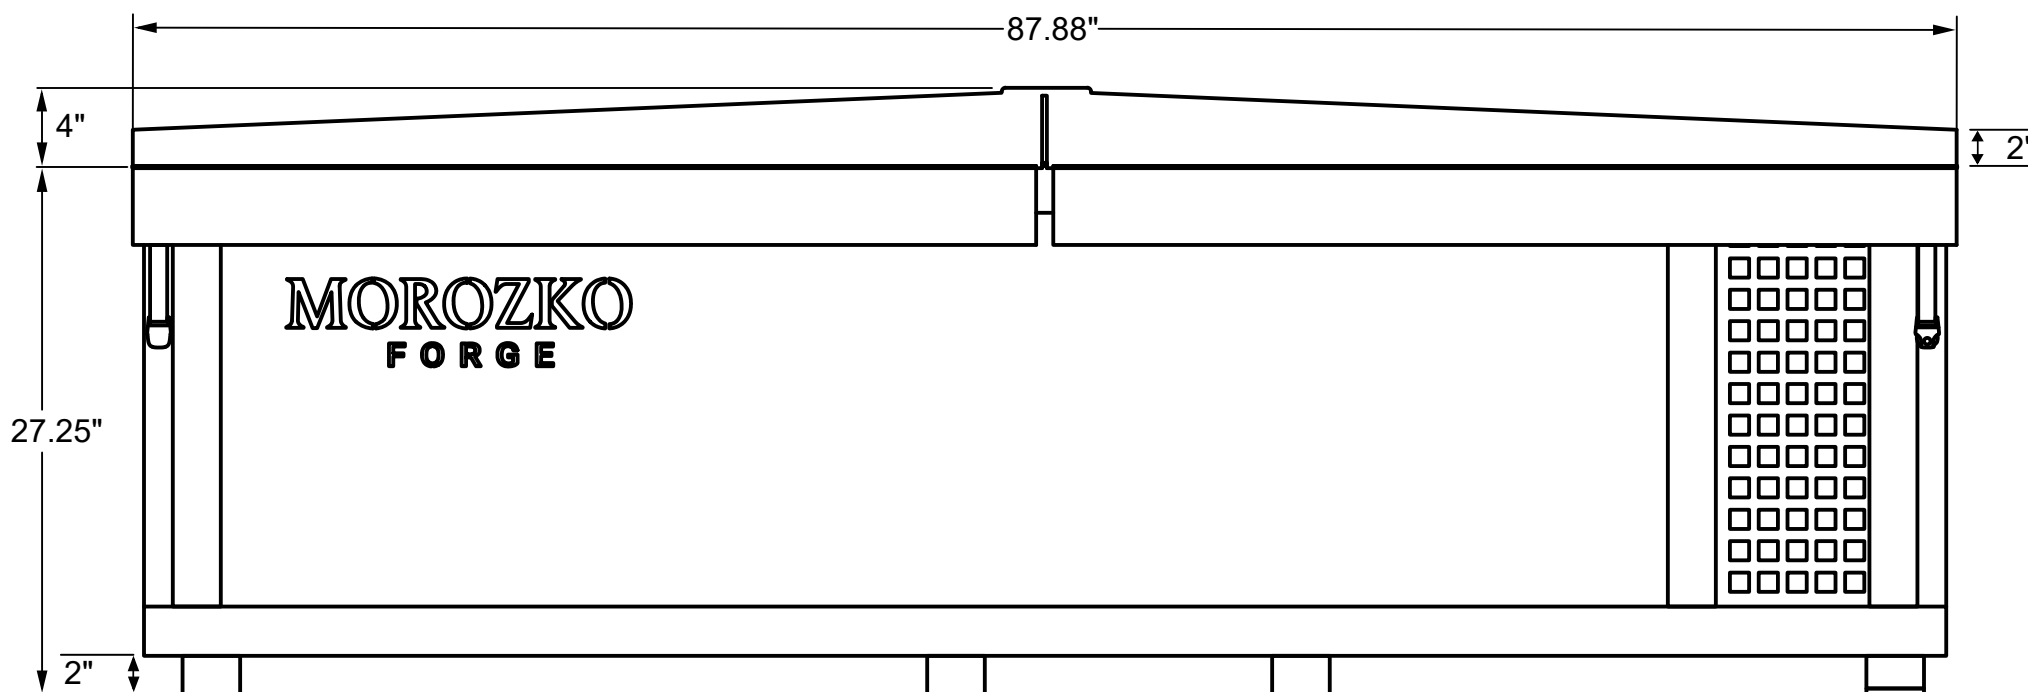

info@morozkoforge.com
Morozko Forge
7150 W. Roosevelt Rd. A-161
Phoenix, AZ 85043

Electrical Data

Voltage: 103-127 volts
Phase: 1
Frequency: 60 Hz
Amperage: 8.5 amps
GFCI Trip Level: 4mA~6mA UL/CUL Certified
Temperature control: Inkbird ITC-310

Mechanical Data

Compressor: Tecumseh AE4450Y-AA1A
Operating temperature: 0-115 F
Refrigerant/Charge: R134a/12.1oz
Cooling Capacity: 6000 BTU/hr
Insulation rating: R9
Winterization Protection: 0 F

Exterior Dimensions & Protection

Weight with lid (empty): 296 lbs
Weight with lid (filled 80 gal): 963 lbs
Length: 87.88 in.
Width: 32.25 in.
Height with lid: 31.25 in.
Tub: 16 gauge 304 Stainless Steel
Floor skids: non marking composite plastic
Wood finish: exterior grade plyw with UV protection

Water Treatment

Filtration Pump: Intex C1000
Mechanical Filter: Intex Type A (#29000E)
Mechanical Filtration: 50 microns
Ozone Generator: Del Ozone O3 Series UO3
Ozone Injection rate: 50 mg/hr nominal
Filtration Flow rate: \leq 240 GPH
Tub capacity: 80 gal