## Technical Specification

# CVOFIRE

### Compact Fire Ribbon

Index # 21 - Rev-23 / 23-Sept-2021

#### **DESCRIPTION**

The Compact Fire Ribbon has a mesmerising dancing ribbon of flame. The gas fire is supplied as a complete

fireplace package including gas ribbon burner, enclosure, remote control and natural stone fascia. The 5.7Kw gas burner is operated by a thermostatic remote control with digital handset. The fire is designed with minimal depth, 317mm, to allow installation into most properties. The fire requires only a gas supply and can be used with any chimney or flue liner system. No air vent is required with this modern contemporary fireplace design.

The enclosure is available in either Polished, Brushed or Satin Black Steel



Choose any fascia from the CVO natural stone range Visit our website www.cvo.co.uk



#### **UKCA & UKNI APPROVAL**

The Compact Fire Ribbon is UKCA & UKNI approved for Natural Gas Only I2H – G20 / 20mBar and is available for the United Kingdom Only.

#### POWER RATING & RUNNING COST

Natural Gas – Heat Input 5.7kW, Flow Rate 0.543m3/hour, 24p/hour

#### **DIMENSIONS**

Overall dimensions of the fire – See drawings on page 2

#### OTHER TECHNICAL INFORMATION

- 1. When installed, the enclosure is positioned 20mm out from the wall; when the fascia is fitted the gap is closed by the fascia. This means, in real terms the required depth is 315mm.
- 2. The fire must be installed with the fascia.
- 3. Ignition The fire is operated by a RF (radio frequency) battery powered, remote system with handset. The handset shows the condition of the batteries in both the handset and the fire. High quality batteries must be used and have a life of approximately 12 months or greater depending on usage. The remote also includes a thermostat to regulate the room temperature.
- 4. Chimney or Flue System Brick built Class 1 or Class 2. 127mm flue liner (or larger) with a minimum length of 3 metres.
- 5. Gather It is recommended to buy the standard gather with the fire to ensure correct installation and to stop debris falling into the enclosure.
- 6. Safety device Tested to the latest UKCA & UKNI safety standard. Fitted with ODS (Oxygen Depletion System) safety system which monitors oxygen levels in the room and shuts off the fire should the chimney be blocked. It is advised that when operating the appliance in a room where children or elderly people will be present that a fireguard should be used.
- 7. Ventilation No additional room ventilation is required from outside (air vent).


CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd.


All dimensions include a +/-2mm tolerance.



## Compact Fire Ribbon

Index # 21 - Rev-23 / 23-Sept-2021

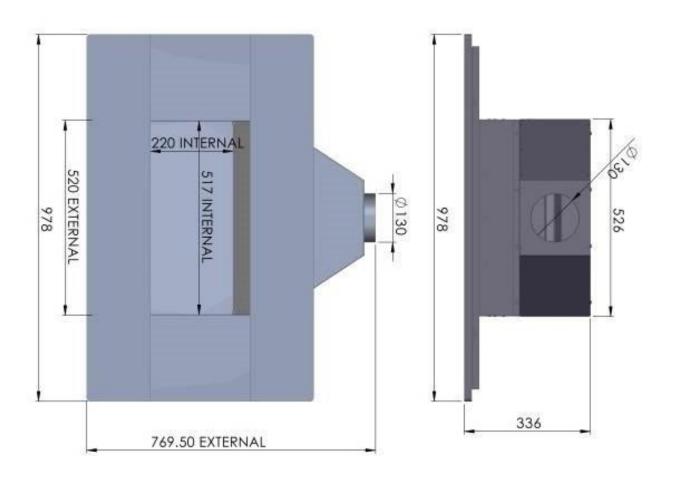

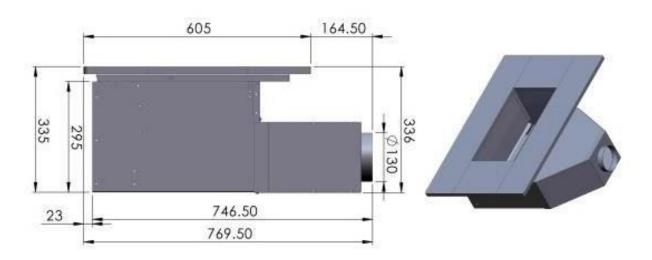

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd.

All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: <a href="mailto:sales@cvo.co.uk">sales@cvo.co.uk</a> Web: <a href="mailto:www.cvo.co.uk">www.cvo.co.uk</a>