


Double-Sided Fire Wave™


Index Number: 84, Rev-6, Page 1 of 2

CVO Fire : 01325-301020 : [www.cvo.co.uk](http://www.cvo.co.uk) : [sales@cvo.co.uk](mailto:sales@cvo.co.uk)

Shown below as trimless.

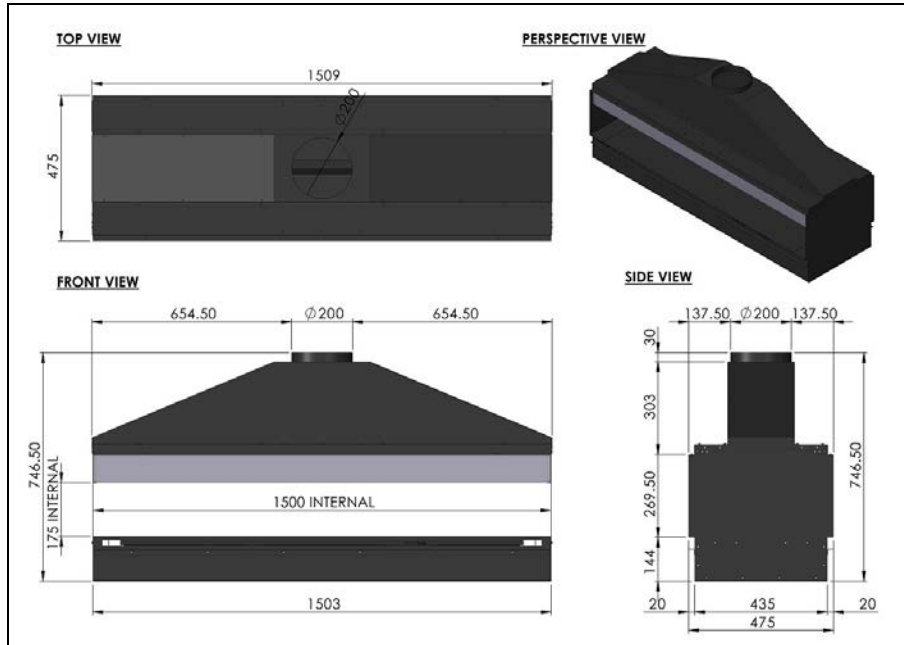

Shown below with fascia on one side.

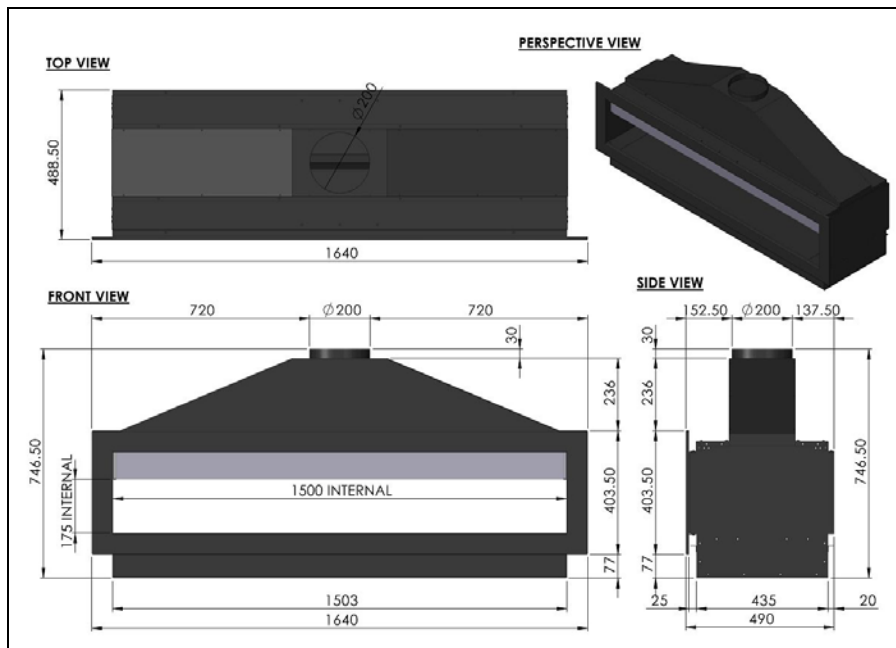

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.


Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN  
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: [sales@cvo.co.uk](mailto:sales@cvo.co.uk) Web: [www.cvo.co.uk](http://www.cvo.co.uk)

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit [www.firevault.co.uk](http://www.firevault.co.uk) or call 01325-301020 for full contact details, location maps and directions.

## Double-Sided Fire Wave™

Index Number: 84, Rev-6, Page 2 of 2

CVO Fire : 01325-301020 : [www.cvo.co.uk](http://www.cvo.co.uk) : [sales@cvo.co.uk](mailto:sales@cvo.co.uk)

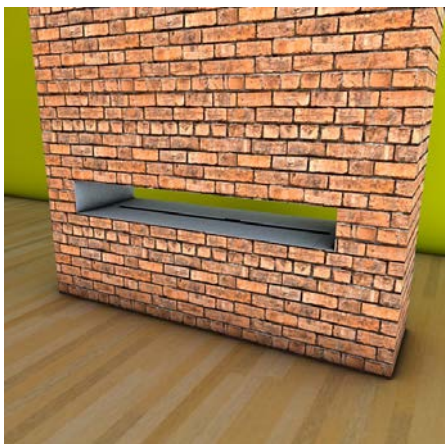

The gas fire is supplied as a complete package of enclosure, gather and gas burner with remote control. There is an option to add either a metal or stone trim on either one or both sides. Ask for details.

### OPTIONS:

- **Finish** : Brushed, Black or Polished.
- **Trim** : Stone or metal upon request.
- **Upgrade** : Mains 240v supply, Fireplace Logs or Pebbles.
- Bespoke sizes may be possible, please ask.

### APPROVALS:

- Gas Types - I2H, I2E, I2E+, I2L, I3P, I3+, I3B/P
- Gas Categories – G20, G25, G30, G31 [Natural Gas and LPG/Propane]
- Countries - AT, CH, CZ, DK, EE, ES, FI, GB, GR, HR, IE, IT, LT, LV, NO, PT, RO, SE, SI, SK, TR, DE, LU, PL, RO, BE, FR, NL, CY, HU, TI.

**VERSIONS:** The standard version is shown on Page 1 with a 265mm opening. Another version with a 175mm opening height is available upon request.

**DIMENSIONS:** The standard 265mm version is shown in the image on page 1.

### RIBBON POWER RATING:

Natural Gas : 10.7kw Flow Rate : 1.2m<sup>3</sup>/Hour  
LPG/Propane: 10.7kw Flow Rate: 0.7m<sup>3</sup>/Hour

**VENTILATION:** This appliance requires a 100cm<sup>2</sup> air vent to provide ventilation from outside.

### OTHER TECHNICAL INFORMATION:

- The fire is designed as a complete package with the gas burner and gather fitted before delivery to site. The gather is an integral part of the fire and must be fitted to ensure the fire operates safely and remains structurally sound.
- This fire is supplied with battery powered remote system operated by a hand set. The remote includes a unique thermostatic function which can be used to maintain the room temperature by automatically adjusting the flame.
- Burner can be set for operation to Natural Gas or LPG/Propane - please specify when ordering.
- Safety Devices are fitted as standard – FFD (Flame Failure Device) & ODS (Oxygen Depletion System).
- As a single-sided fire the fire is approved for use in a class 1 flue system or with a 200mm flue liner with a minimum length of 2.5m (3m LPG). As this is a double-sided or “see-through” fire, open on both sides it is likely that mechanical extraction will be required to avoid spillage. To avoid the use of a fan a trim with a glass panel can be purchased and fitted on one side. If the fire is to be open on both sides consult a flue specialist for guidance.
- In older properties we recommend that the chimney is swept and tested prior to installation.
- This is a high power appliance which requires air routed from the room into the burner chamber. Consult the installation booklet.
- Appliance must be installed by Gas Safe Registered Installer [UK].
- With all gas appliances an increase in noise can be expected when using the low setting as the gas flow is restricted by the valve to reduce the flame and power. This noise is quite normal for the power rating of this fire.
- When installing this fire into an existing brick built chimney without a flue liner the enclosure & gather must be sealed to the existing chimney to ensure that air cannot flow from the burner box into the space behind the enclosure. Failure to install the fire correctly will result in serious damage to the burner unit.
- If in doubt about any aspect of this specification, please call our Sales Team on 01325-301020 to discuss.

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification, please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN  
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: [sales@cvo.co.uk](mailto:sales@cvo.co.uk) Web: [www.cvo.co.uk](http://www.cvo.co.uk)

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit [www.firevault.co.uk](http://www.firevault.co.uk) or call 01325-301020 for full contact details, location maps and directions.