



Firenze Gas fireplace insert

Warmth atmosphere.

MAIN FEATURES

TECHNICAL

Visible flame surface: L 701 mm x H 418 mm.
Traditional shape suitable for any ambient.

END USER

Classic dimension for a relaxing visible flame.
Flame setting (Min/Max).

01_ Radio remote control with timer and display (optional)



01

02_ Casing for redirecting the heating flow equipped standard




02


BALANCED FLUE FIREPLACE INSERT

- > Frameless version: minimalist installation with dancing flame prominence
- > Possibility to install the gas valve away from insert
- > Adjustable feet
- > Coaxial chimney
- > Standard remote control or with display (accessory)

RANGE, SIZE AND WEIGHT

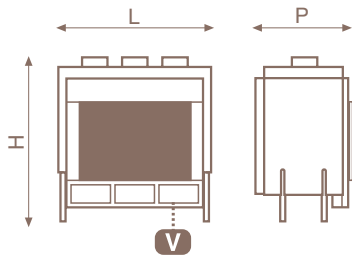

Model	Firenze 70 frameless	u.m.
Length (L)	861	mm
Height (H)	886	mm
Depth 1 sided (P)	490	mm
Depth 2 sided (P)	483	mm
Glass length	701	mm
Glass height	418	mm
Net weight 1 sided	78,5	Kg
Net weight 2 sided	78	Kg




Equipped standard

- standard remote control (with no display)
- adjustable feet
- convection casing with air pipes Ø13cm

- **V** remote gas valve with external door
- couple of wall fixing bracket (1 sided insert model)
- suction cup for removing glass


NOTE: FOR THE APPLIANCE OPERATING WITH LPG, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "L" (EXP. IN07AT L0000).

RANGE





Model	Code	Description
70frameless	IN07AM M0000	1 sided insert
70frameless	IN07AT M0000	2 sided insert

INSTALLATION TYPOLOGIES

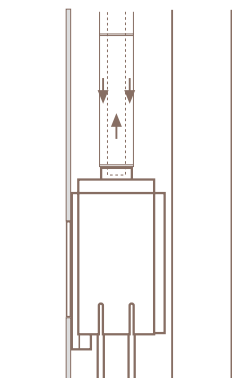

Flue line length for balanced flue series.

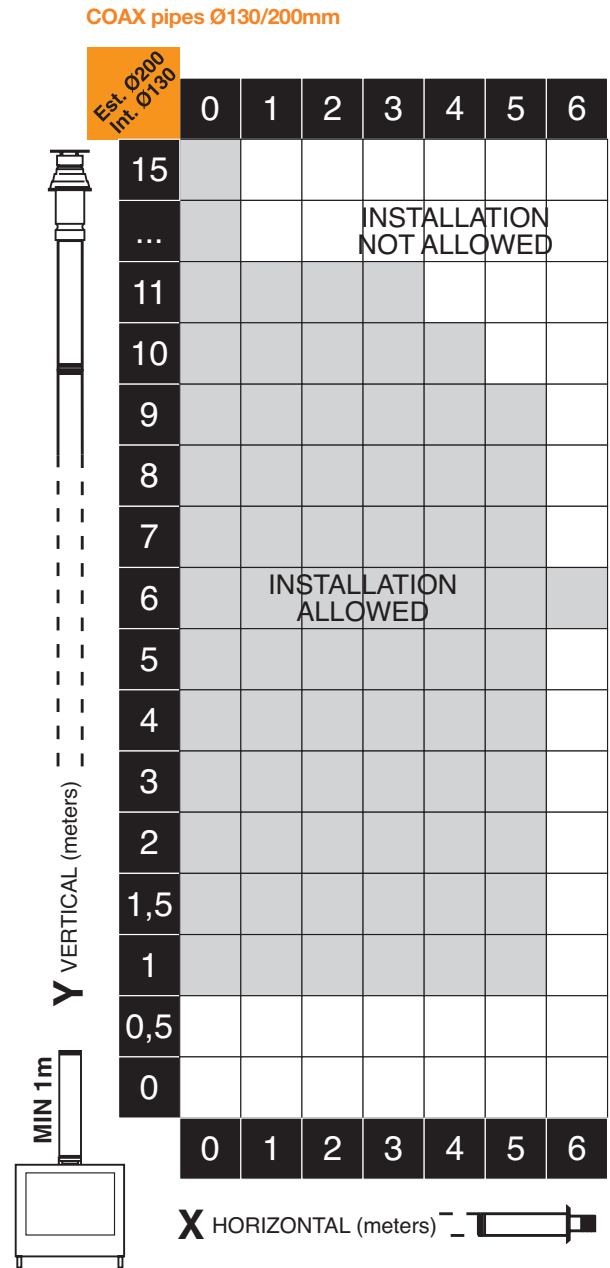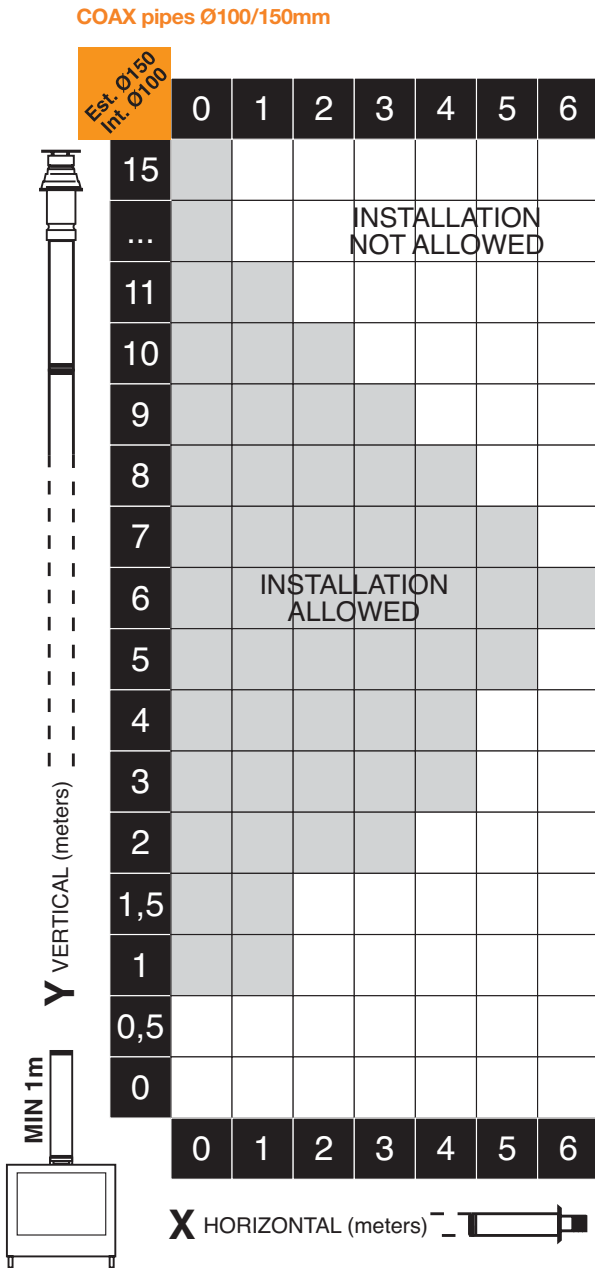

NOTE: FOR CERTAIN TYPES OF INSTALLATION OR LENGTHS GREATER THAN THE VALUES LISTED ABOVE, CONTACT ITALKERO TECHNICAL OFFICE.

