



RANGE, SIZE AND WEIGHT

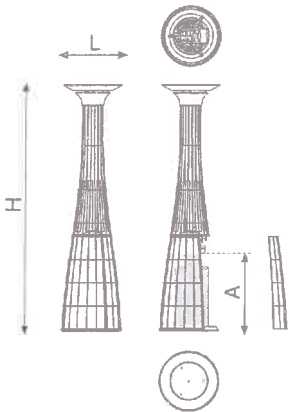

Model	manual	remote-controlled	u.m.
Hat (L)	545	545	mm
Base (L)	558	558	mm
Height (H)	2280	2280	mm
Height cylinder (A)	750	721	mm
Net weight	27	28	Kg
Gross weight	35	36	Kg



Equipped standard

- Anti-tipping device
- Manual model, various power levels
- Remote control model, 3 power levels

NOTE: FOR APPLIANCE OPERATING WITH NATURAL GAS, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "L" (EX. LF12M2 M0300).

RANGE



Model	Code	Description
12m	LF12M2 L0300	Manual ign. - galvanized and painted (transparent).
12t	LF12A2 L0300	Rem. Control - galvanized and painted (transparent).
12m	LF12M2 L0000	Manual ignition polished stainless steel.
12t	LF12A2 L0000	Rem. Control polished stainless steel.

INSTALLATION TYPOLOGIES

