



## Portofino Gas fireplace insert

# Warmth atmosphere.

### MAIN FEATURES

#### TECHNICAL

Visible flame surface: L 435 mm x H 386 mm.

Tiny, fitting everywhere.

#### END USER

Cosy atmosphere thanks to a cosy dancing flame.

Flame setting (Min/Max).

01\_ Radio remote control with timer and display (optional)



01

02\_ Casing for redirecting the heating flow equipped standard




02


## BALANCED FLUE FIREPLACE INSERT

- > Frameless version: minimalist installation with dancing flame prominence
- > Possibility to install the gas valve away from insert
- > Adjustable feet
- > Coaxial chimney
- > Standard remote control or with display (accessory)

### RANGE, SIZE AND WEIGHT



Model	Portofino 50 frameless	u.m.
Length (L)	595	mm
Height (H)	855	mm
Depth 1 sided (P)	408	mm
Depth 2 sided (P)	401	mm
Glass length	435	mm
Glass height	386	mm
Net weight 1 sided	52	Kg
Net weight 2 sided	51,5	Kg




#### Equipped standard

- standard remote control (with no display)
- adjustable feet
- convection casing with air pipes Ø13cm

- **V** remote gas valve with external door
- couple of wall fixing bracket (1 sided insert model)
- suction cup for removing glass


**NOTE:** FOR THE APPLIANCE OPERATING WITH LPG, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "L" (EXP. IN04AT L0000).

### RANGE





Model	Code	Description
50frameless	IN04AM M0000	1 sided insert
50frameless	IN04AT M0000	2 sided insert

### INSTALLATION TYPOLOGIES

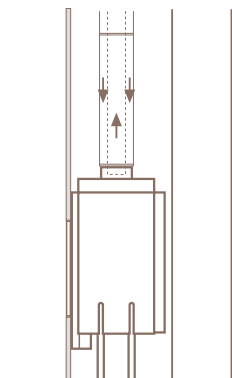

**Flue line length for balanced flue series.**

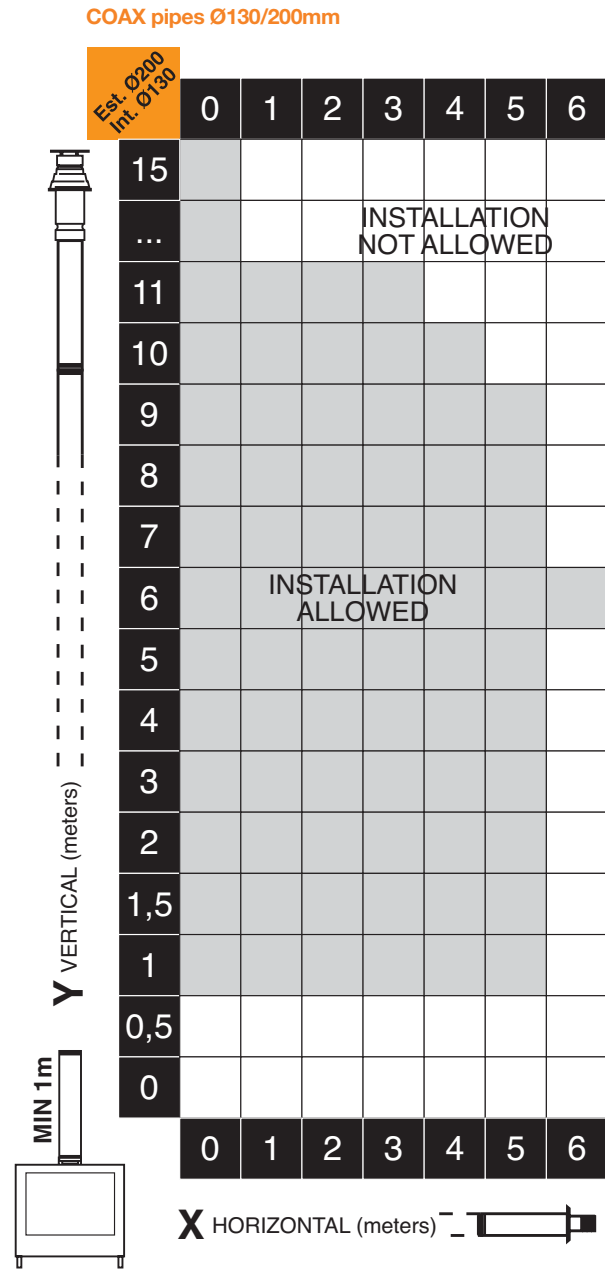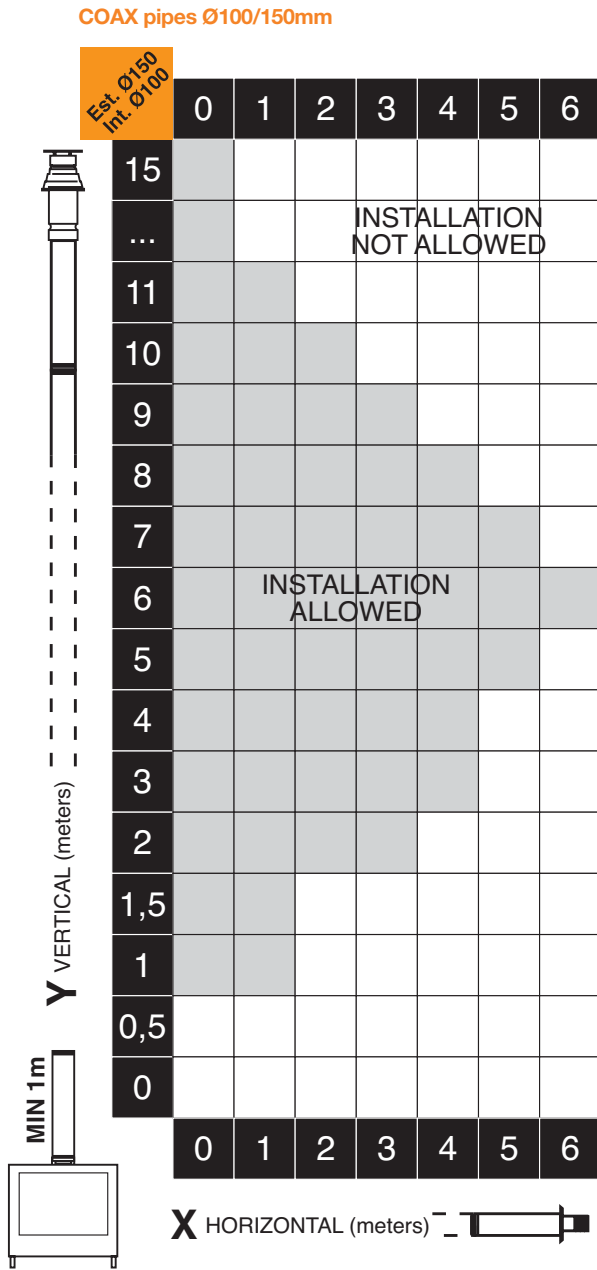

NOTE: FOR CERTAIN TYPES OF INSTALLATION OR LENGTHS GREATER THAN THE VALUES LISTED ABOVE, CONTACT ITALKERO TECHNICAL OFFICE.

