



Roma Gas fireplace insert

Warmth atmosphere.

MAIN FEATURES

TECHNICAL

Visible flame surface: L 435 mm x H 986 mm.

END USER

Creates atmosphere by a rising up visible flame.
Flame setting (Min/Max).

01_ Radio remote control with timer and display (optional)



01

02_ Casing for redirecting the heating flow equipped standard




02

BALANCED FLUE FIREPLACE INSERT

- > Frameless version: minimalist installation with dancing flame prominence
- > Possibility to install the gas valve away from insert
- > Adjustable feet
- > Coaxial chimney
- > Standard remote control or with display (accessory)

RANGE, SIZE AND WEIGHT

Model	Roma 50 frameless	u.m.
Length (L)	595	mm
Height (H)	1455	mm
Depth 1 sided (P)	408	mm
Depth 2 sided (P)	401	mm
Glass length	435	mm
Glass height	986	mm
Net weight 1 sided	76,5	Kg
Net weight 2 sided	76	Kg

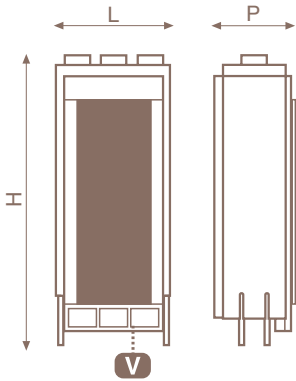


Equipped standard	
<ul style="list-style-type: none"> · standard remote control (with no display) · adjustable feet · convection casing with air pipes Ø13cm 	<ul style="list-style-type: none"> · V remote gas valve with external door · couple of wall fixing bracket (1 sided insert model) · suction cup for removing glass


NOTE: FOR THE APPLIANCE OPERATING WITH LPG, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "L" (EXP. IN05AT L0000).

RANGE



Model	Code	Description
50frameless	IN05AM M0000	1 sided insert
50frameless	IN05AT M0000	2 sided insert



INSTALLATION TYPOLOGIES

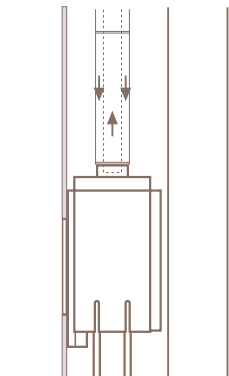

Flue line length for balanced flue series.

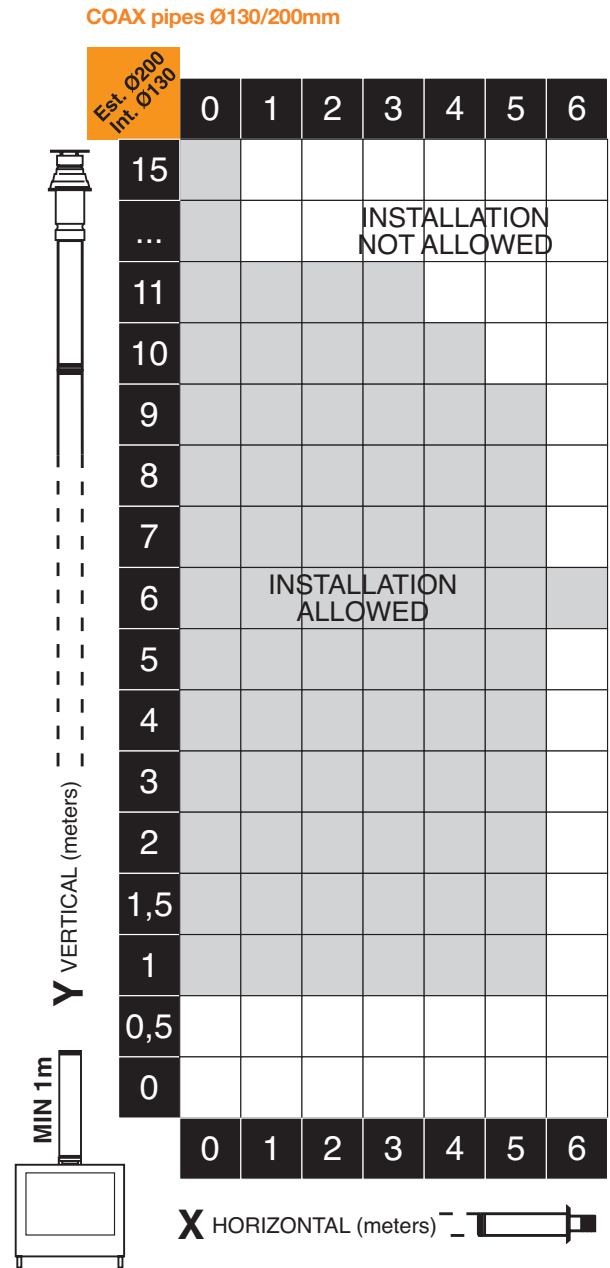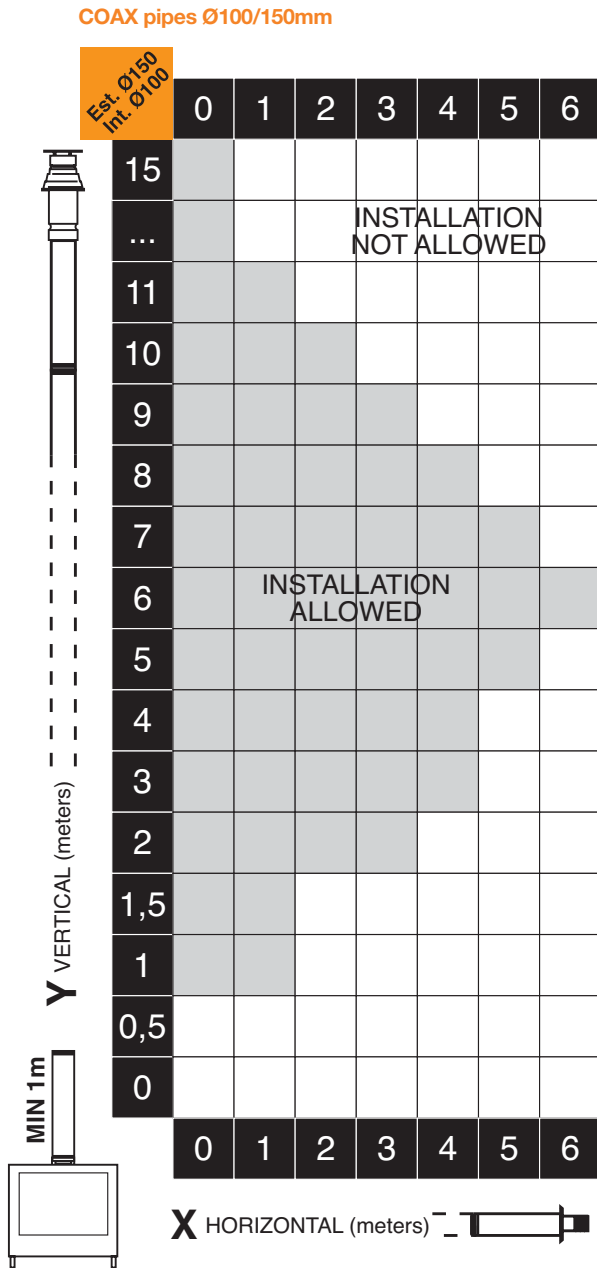

NOTE: FOR CERTAIN TYPES OF INSTALLATION OR LENGTHS GREATER THAN THE VALUES LISTED ABOVE, CONTACT ITALKERO TECHNICAL OFFICE.

