



SETH

Exterior LED surface mounted wall & bollard lights

- Input voltage range: 100-240V AC 50/60Hz
- Constant current driver included
- Material: double anti-corrosion powder coated high-pressure cast aluminium & anti aging UV protected PC diffuser
- LED chips: 8pcs 3030 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- *Bollard lights can not be used inground
- For bollard lights, to maintain the IP rating please use circular cable in junction
- For bollard lights, for parallel and single connection we recommend using an appropriate IP68 connector (CLA Connector: CONN001 & CONN002)

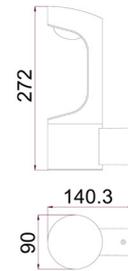

SETH1
(Wall Light)

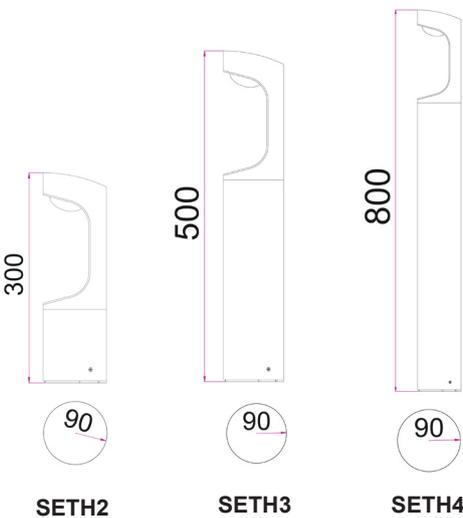

SETH2
(Bollard Light)



SETH3
(Bollard Light)



SETH4
(Bollard Light)

Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
SETH1	WALL LED 240V S/M Matt Black	3000K	428.76LM	9W	>0.5	>80	L 272 x W 90mm		1/8
SETH2	BOLLARD LED Matt Black	3000K	428.76LM	9W	>0.5	>80	H 300mm	Ø90mm	1/9
SETH3	BOLLARD LED Matt Black	3000K	428.76LM	9W	>0.5	>80	H 500mm	Ø90mm	1/9
SETH4	BOLLARD LED Matt Black	3000K	428.76LM	9W	>0.5	>80	H 800mm	Ø90mm	1/9

*These bollards are designed for mounting on a solid surface such as a concrete path or sturdy timber decking

*To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)