



How To Change A Tire


Courtesy of EVERYDAYCARRYSUPPLY.COM

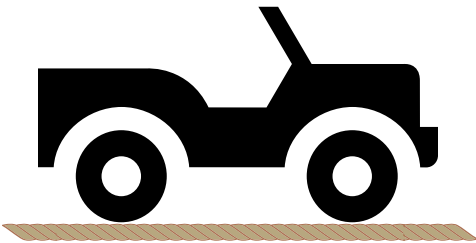


1. Park car(1st or reverse if manual) and set emergency brake.
2. Gather all tools. No in and outs after car is raised.
3. Chock the wheel diagonal to the wheel being changed.
4. Loosen lug-nuts but do not remove(1 full rotation per lug-nut is suffice)

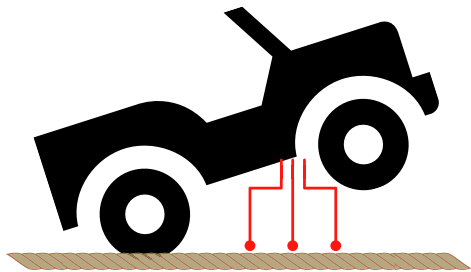

5. Properly engage jack-this varies from car to car(consult car manual for jack points).
6. Raise car until wheel moves free from ground.
*Never get under a car that's on jacks.

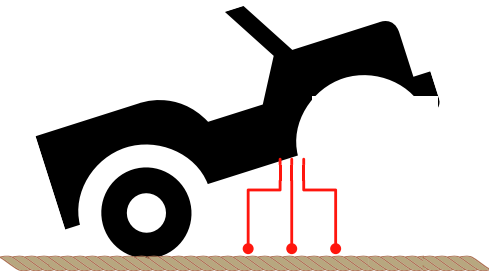

7. Remove wheel and replace with spare.
*Keep track of lug nuts. That Starbucks venti double frappe cup in the cupholder seems perfect for this.
8. Hand thread all the lug nut until hand-tight.
9. Use lug wrench to tighten nuts as much as possible in a cross pattern(shown below).

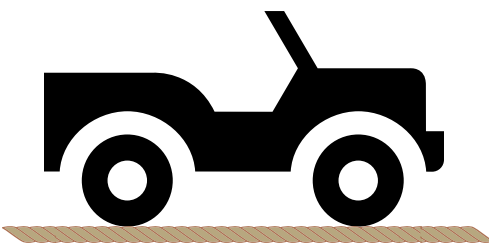

10. Lower vehicle. Make sure all limbs and other valuables such as people are clear.
11. With tire on ground, really tighten those lug nuts in a cross pattern (look below).
12. Get out of Dodge. Get your tire fixed.

4-Lug



5-Lug



6-Lug

