

HERE'S HOW TO USE YOUR ESTES CATALOG Information for each rocket kit is provided on the page where the Kit Feature Symbols indicate

rocket is displayed. This information includes:

- · Skill Level number recommends the modeling skill and experience necessary for a rocketeer to successfully construct the kit. Skill Level 1 kits are suggested for beginners, Skill Level 2 kits for experienced rocketeers, Skill Level 3 kits for advanced modelers and Skill Level 4 kits are recommended for the master modeler.
- Kit Name
- Special features and additional kit information including length, diameter and weight.
- · Engines lists all recommended engines to fly the rocket. Engines are listed from least to most powerful. (Ist Flt.) indicates which engine should be used to become familiar with your rocket's flight profile.
- Product number for kit which should always be used when
- Price of the kit (or see Price List.) All prices in this catalog are subject to change without notice.
- · Average Shipping Weight for kits.

Kit Feature Symbols indicate the following kit features:




















©Copyright Estes Industries, 1988. All Rights Reserved.

Model Rocketry Is An Internationally Recognized Hobby With A Safety Record Of More Than 300 Million Successful Model Rocket Launchings.

Estes Model Rocket Engines Are NAR Certified*

Engines tested by the National Association of Rocketry met performance standards of NFPA 1122 and

Estes Model Rocket Engines Have Been Tested And Approved By:

- •United States Government
- Truesdail Laboratories, Inc.
- •Governments of West Germany, France, Great •Canadian Association of Rocketry Britain, and Canada

Estes Model Rocketry Products Meet The Boy Scouts of America National 4-H Clubs Standards And Requirements Established •U.S.A.F.-J.R.O.T.C. By:

- •National Fire Protection Association
- •U.S. Consumer Product Safety Commission
- •U.S. Food & Drug Administration
- •U.S. Department of Transportation

Federal Aviation Administration

- •U.S. Postal Service •United Parcel Service
- •American Insurance Association
- •International Air Transport Association
- •International Maritime Organization

•Air Line Pilots Association

Model Rocketry Is Endorsed As A Safe And Rewarding Hobby By:

- Civil Air Patrol
- ·NASA ·Hobby Industry of America
- Colleges, Universities, Elem., Jr. High, & High Schools
- •Future Astronaut Training Program
- •Hundreds of Camp and Recreation Programs

PLEASE NOTE: Unless otherwise stated, all the model rocketry kits in this catalog are hobby kits requiring assembly. Launch system, engines, launch supplies, glue, batteries, paint, tools, and finishing materials are not included. Recommended for ages 10 through adult. Adult supervision suggested for those under 12 years of age.

FULL ONE YEAR WARRANTY

Your Estes product is warranted against defects exclusion or limitation of incidental or consein materials or workmanship for one year from quential damages, so the above exclusion may the date of the original purchase. Any Estes prod- not apply to you. uct, except computer software, which, because of This warranty gives you specific legal rights and proves to be defective within the one-year war- state to state. ranty period will be repaired or replaced, at Estes' option and at no charge to you, provided it is please return the defective part of your Estes returned to Estes with proof of purchase.


This warranty does not cover incidental or consequential damage to persons or property caused by the use, abuse, misuse, failure to comply with operating instructions or improper storage of the warranted product. Some states do not allow the

a manufacturing mistake, malfunctions or you may also have other rights which vary from

For repair or replacement under this warranty, product with proof of purchase to:

Estes Industries, Customer Service Department, Penrose, Colorado 81240.



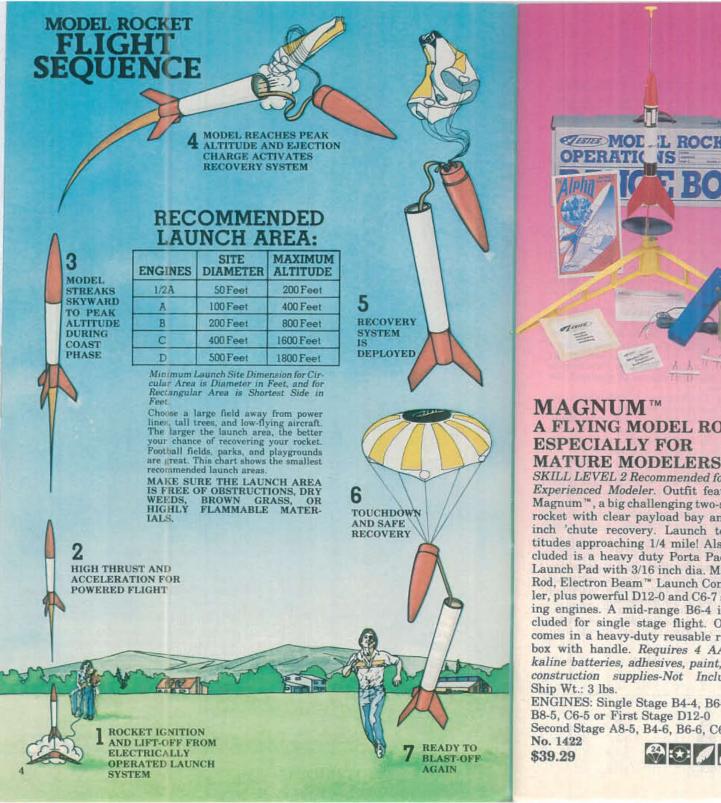

ALPHA III™ FLYING MODEL ROCKETRY STARTER SET

SKILL LEVEL 1 Recommended for the Beginning Modeler. Includes easy-tobuild Alpha III'm model rocket kit. Colored Parts - no painting required! Also includes Porta-Pad® II launch pad with blast deflector plate and 1/8" x 36" twopiece launch rod, assembled Electron Beam™ launch controller and three NAR certified model rocket engines, recovery wadding and igniters. Requires 4 alkaline AA batteries, glue and finishing supplies-Not Included. Ship. Wt. 3 lbs.

ENGINES: 1/2A6-2, A8-3 (1st Flt.), A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-5 C6-7.

No. 1406 \$25.99



STARTER SET COMES IN REUSABLE RANGE BOX

A FLYING MODEL ROCKET OUTFIT

SKILL LEVEL 2 Recommended for the Experienced Modeler. Outfit features Magnum™, a big challenging two-stage rocket with clear payload bay and 24 inch 'chute recovery. Launch to altitudes approaching 1/4 mile! Also included is a heavy duty Porta Pad® II Launch Pad with 3/16 inch dia. Maxi™ Rod, Electron Beam™ Launch Controller, plus powerful D12-0 and C6-7 staging engines. A mid-range B6-4 is included for single stage flight. Outfit comes in a heavy-duty reusable range box with handle. Requires 4 AA alkaline batteries, adhesives, paint, and construction supplies-Not Included.

ENGINES: Single Stage B4-4, B6-4, B8-5, C6-5 or First Stage D12-0 Second Stage A8-5, B4-6, B6-6, C6-7





NAR/HIA MODEL ROCKETRY SAFETY CODE (Eff. 1.1-87)

1. Construction-My model rockets will be made of lightweight materials such as paper, wood, rubber, and plastic, without

any metal as structural parts.

2. Engines—I will use only pre-loaded factory-made NAR Certified model rocket engines in the manner recommended by the manufacturer. I will not alter or dismantle model rocket engines or their ingredients in any way or attempt to reload these engines.

3. Recovery-I will always use a recovery system in my rockets that will return them safely to the ground so that they may be flown again. I will use only flame-resistant recovery wadding in my rockets.

4. Weight Limits-My model rocket will weigh no more than 1500 grams (53 oz.) at lift-off, and the engines will contain a total of no more than 125 grams (4.4 oz.) of propellant. My model rockets will weigh no more than the engine manufacturer's 10. Launch Safety-I will not let anyone aprecommended maximum lift-off weight for the engines used or will use the engines recommended by the manufacturer for my rocket.

5. Stability—I will check the stability of my model rockets before their first flight, except when launching models of already

proven stability.

6. Payloads-My model rockets will never carry live animals or payloads that are intended to be flammable or explosive.

7. Launch Area-I will launch my model rockets outdoors in a cleared area, free of hazardous to people or property. tall trees, power lines, and buildings. I 12. Pre-Launch Test—When conducting rewill ensure that people in the vicinity are aware of the pending rocket launch and are in a position to see the rocket's lift-off before I begin my audible 5-second countdown.

8. Launcher-I will launch my model rockets from a rod or other device which provides rigid guidance until the rocket has 13. Launch Angle-I will not launch rockets reached a speed adequate to ensure a safe flight path. To prevent accidental eye in-jury, I will always place the launcher so that the end of the rod is above eye level or will cap the end of the launch rod when approaching it. I will cap or disassemble 14. Recovery Hazards-If a model rocket my launch rod when not in use and will never store it in an upright position. The launch device will have a jet deflector to

prevent the engine exhaust from hitting the ground directly. I will always clear the area around my launch device of brown grass, dry weeds, and other easy-toburn materials.

9. Ignition System-The system I use to launch my model rockets will be remotely controlled and electrically operated and will contain a launching switch that will return to "off" when released. The system will contain a removable safety interlock in series with this firing switch. When launching, all persons will remain at least 15 feet away from any model rocket when igniting engines totalling 30 N-sec of total impulse or less and at least 30 feet when igniting engines totalling more than 30 N-sec total impulse. I will use only electrical igniters which will ignite my rocket engine within one second of actuation of the launching switch.

proach a model rocket on a launcher until I have made sure that the safety interlock has been removed or the battery has been disconnected from the launcher. In the event of a misfire, I will wait one minute before allowing anyone to approach the

launcher.

11. Flying Conditions-I will launch my model rocket only when the wind is less than 20 miles per hour, and under conditions where the model will not fly into clouds, fly near aircraft in flight, or be

search activities with unproven designs or methods I will, when possible, deter-mine their reliability through pre-launch tests. I will conduct launchings of unproven designs in complete isolation from persons not participating in the actual launching.

so their flight path will carry them against targets. My launch device will be pointed within 30 degrees of vertical. I will never use model rocket engines to propel any device horizontally.

becomes entangled in a power line or other dangerous place, I will not attempt to re-

As a member of the Estes Model Rocketry Program, I promise to faithfully follow all rules of safe conduct as established in the above code.

Signature _











SIZZLER FLYING MODEL ROCKETRY STARTER SET

SKILL LEVEL 1 Recommended for the Beginning Modeler. Includes the 23 inch long Sizzler" model rocket kit featuring parachute recovery and flights over 900 feet. Also included are the assembled Electron Beam" Launch Controller and Porta-Pad* II Launch Pad with blast deflector plate, and 1/8" x 36" launch rod. Legs remove easily for compact storage. Flight Pak includes three NAR certified model rocket engines, recovery wadding, and igniters. Requires 4 AA alkaline batteries, glue and finishing supplies-Not Included.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5.

No. 1432 \$29.99



BOTH SETS PACKAGED IN REUSABLE RANGE BOXES!

SPACE SHUTTLE™ FLYING MODEL ROCKETRY STARTER SET

SKILL LEVEL 2 Recommended for the Experienced Modeler. Set includes beautiful scale model of America's space transport vehicle. All Space Shuttle names are included on the kit decal. Also included is the assembled Electron Beam™ launch controller, Porta-Pad® II launch pad, and three engines, plus igniters and wadding.

Over 10 inches high, the Space Shuttle™ can be launched to altitudes of 500 feet. The model returns to Earth via 18 inch parachute recovery.

Requires white glue, plastic cement, paint, finishing supplies, and 4 AA size alkaline batteries for operation-Not Included. Ship. Wt.: 2 lbs.

ENGINES: A8-3 (1st Flt.), B4-4,

B6-4, B8-5, C6-5 No. 1441 \$32.69



READY TO FLY

NO CONSTRUCTION REQUIRED





REVOLUTIONARY SERIES™

Assemble and attach the 12 inch parachute, go out to the flying field, prep your model and launch to over 1200 feet with a "C" engine. Length: 15" Dia.: 0.976 Wt. 1.2 oz.

MINUTEMAN" No. 0731

ENGINES: 1/2A6-2, A8-3 (1st Flt.), A8-5. B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7

Engines and launch system, are not included. Avg. Ship. Wt.: 10 oz.



PATRIOT" No. 0730

EASY TO BUILD

SKILL LEVEL 1

Recommended for the Beginning Modeler.



ALPHA III"

SKILL LEVEL 1 Another great first or second kit. Plastic nose cone and fin assembly make for easy, quick assembly. This rocket will deliver outstanding performance flight-after-flight. Length 12.25" Dia. 0.976" Wt. 1.2 oz. ENGINES: 1/2A6-2, A8-3 (1st Flt.), A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7.

No. 1256 \$6.99







GNOME™

SKILL LEVEL I Red nose cone, white body tube, plus green fin unit and launch lugs make this kit a snap to construct. And streamer recovery makes it easy to find after awesome flights over 800 feet. This could be your favorite rocket! Length: 10.25" Dia. 0.544" Wt. 0.42 oz. ENGINES: 1/2A3-2T (1st Flt.), A3-4T, A10-3T,

No. 0886 \$3.19





Engines, launch systems, and adhesives are not included. Avg. Ship. Wt. 10 oz.

LAUNCH CONTROLLERS

Battery-powered launch controllers provide the electricity necessary to heat the igniter for model rocket engine ignition. Removing the safety key disables the launch controller so the rocket cannot be launched accidentally. Insert the safety key only after the rocket is prepped, the micro-clips attached to the igniter in the engine, everyone has left the launch pad area, and you are ready for countdown. The continuity or arming light should glow after the safety key is inserted. At zero on the countdown, press and hold the launch button depressed until the rocket lifts off.



Recommended for the Beginning Modeler.

RELIANT

SKILL LEVEL 1 Excellent beginner's model features die-cut fiber fins, two-color decal. quick-release engine mount, flights to 1500 feet, and recovery via streamer.

Length 12.5" Dia. 0.736" Wt. 0.62 oz. ENGINES: 1/2A6-2 (1st Flt.), A8-3, A8-5, B4-4. B4-6, B6-4, B6-6, B8-5, C6-5, C6-7,

No. 1986 \$3,19



THUNDERHAWK

SKILL LEVEL 1 This lean 22 inch long sport flier features simple construction and fun. Five fins mean stable flights over 1100 feet. Length: 22" Dia. 0.976" Wt. 1.22 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, C6-5

No. 2002 \$6.29



YELLOW JACKET

SKILL LEVEL 1 High performance is a top feature of this easy-to-assemble sport flier. Flights over 1200 feet high are possible with a "C" engine.

Length: 16.8" Dia. 0.976" Wt. 1.08 oz. ENGINES: A8-3 (1st Flt.), A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7

No. 2008 \$5.79 ASTRO™



SKILL LEVEL 1 Over 1 foot tall, this super flier can reach 1000 feet. With fast assembly and streamer recovery. Astro™ is fun to fly over and over.

Length: 12.75" Dia. 0.736" Wt. 0.79 oz. ENGINES: 1/2A6-2(1st Flt.), A8-3, B4-4, B6-4, C6-5

No. 1937 \$3.59



NINJA™

SKILL LEVEL 1 Dark and sleek, this model speeds to heights of 800 feet and lands gently via brightly colored streamer.


Length: 10.563" Dia. 0.736" Wt. 0.56 oz. ENGINES:1/2A3-4T (1st Flt.), A3-4T, A10-3T

No. 0882 \$4.19



Separate igniters by cutting the tape but do not remove it. Place the igniter deep inside the engine so it is touching the propellant. Use masking tape to firmly secure the igniter in place. The igniter must be touching the propellant when the electricity heats the igniter to cause ignition. Attach clean micro-clips as close to the igniter's center as possible. To avoid a short-circuit the micro-clips and igniter leads must not touch one another or any other metal. If igniter burns in two without igniting the engine, disarm controller, wait one minute and replace the igniter.

Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 10 oz.





RELIANT TM

THUNDERHAWK"

Recommended for the Beginning Modeler.

BLUE STAR™

SKILL LEVEL 1 Out of sight flights are easy with this little performer. Kit includes plastic nose cone and die-cut fins. A streamer provides gentle landings from flights up to 1000 feet. Length: 11.55" Dia. 0.736" Wt. 0.57 oz.

ENGINES: 1/2A6-2 (1st Flt.), A8-3, A8-5, B4-4, B6-4, B6-6, C6-5, C6-7.

No. 1991 \$3.19

5 1

YANKEE™

SKILL LEVEL 1 Easy-to-build, yet performance that will rival any rocket. Capable of flights over 2,000 feet with 30" long streamer recovery.

Length: 11" Dia. 0.736" Wt. 0.42 oz.

ENGINES: 1/2A6-2, A8-3, A8-5 (1st Flt.), B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7.

No. 1381 \$3.59





PULSAR™

SKILL LEVEL 1 Excellent first choice for beginners uses low-cost mini-engines. Easy to assemble, Pulsar™ delivers super performance flights and returns to Earth via break-apart recovery. Can be flown over and over again. Length: 9" Dia. 0.544" Wt. 0.25 oz.

ENGINES: 1/2A3-2T(1st Flt.), A3-4T, A10-3T

No. 0870 \$2.99



MOSQUITO™

SKILL LEVEL 1 The smallest of all Mini-Brutes combines fantastic performance with feather-weight recovery. Balsa and paper construction with simple spray paint decor makes for quick-and-easy assembly.

Length: 3.9" Dia. 0.541" Wt. 0.1 oz.

ENGINES: 1/2A3-4T (1st Flt.), A10-3T No. 0801

\$1.99



ZINGER.

SKILL LEVEL 1 This sporty little flier with 18" streamer recovery will reach "awesome" altitudes up to 2000 feet.


Length: 10.25" Dia. 0.736" Wt. 0.3 oz.

ENGINES: A8-5(1st Flt.), B4-6, B6-6, C6-7.

No. 1917 \$2.99



Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 6 oz.

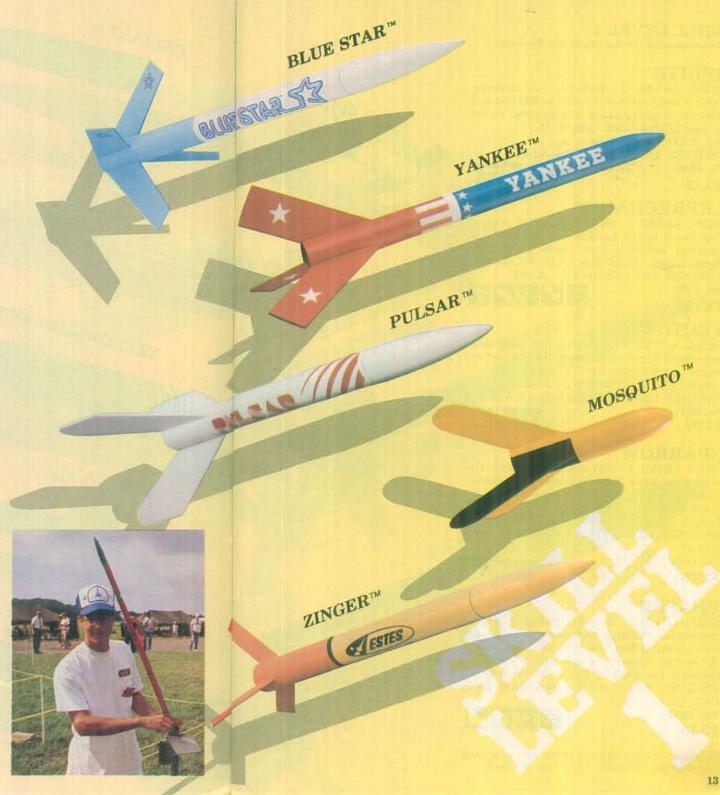

Recommended for the Beginning Modeler.

SPRITE™

SKILL LEVEL 1 Assembles in minutes. Paint it and launch it. Flights to 800 feet and streamer recovery make this an ideal rocket for small flying fields. Length: 11.1"

Dia. 0.541" Wt. 0.43 oz.

ENGINES: 1/2A3-4T (1st Flt.), A3-4T.

No. 0885

\$3.19



LEPRECHAUN™

SKILL LEVEL 1 Building this kit is easy. Painting it is fun. Launch it to 900 feet. The streamer brings it back safely flight after flight. Length: 10.25" Dia. 0.544" Wt. 0.42 oz. ENGINES: 1/2A3-4T (1st Flt.), A3-4T.

No. 0887

\$3.19



VECTOR™

SKILL LEVEL 1 Features fast assembly, economical mini-engine power, break-apart recovery, and flight-after-flight fun.
Length: 7.75" Dia. 0.544" Wt. 0.25 oz.
ENGINES: 1/2A3-2T(1st Flt.), A3-4T, A10-3T

No. 0871 \$2.99





SKILL LEVEL 1 Fun to build and fun to fly, this racy little bird features mini-engine power, fiber fins, three-color decal and break-apart recovery.

Length: 10.75" Dia. 0.541" Wt. 0.39 oz. ENGINES: 1/2A3-2T (1st. Flt.), A3-4T,

A10-3T. No. 0872

\$2.99



PHASER™

SKILL LEVEL 1 Out-of-sight flights! Nearly one foot tall, this high-performance sport model with elliptical fins flies over 1200 feet with a "C" engine. Recovery is easy with a bright 18" streamer. Length: 11.5" Dia. 0.736" Wt. 0.41 oz. ENGINES: A8-5 (1st Flt.), B4-6, B6-6, B8-5, C6-5, C6-7.

No. 1984

\$3.79



Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 8 oz.



Recommended for the Beginning Modeler.

LIBERTY™

SKILL LEVEL 1 Sport flier features red plastic nose cone and fin unit, plus huge patriotic kit decal. A 12 inch parachute returns it to Earth slow and easy from altitudes of 1000 feet or more. Length 16" Dia. 0.976" Wt. 1.38 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C5-3, C6-3, C6-5, C6-7.

No. 1989 \$4.89 LASER™



SKILL LEVEL 1 Super flier featuring fast assembly and high-tech appearance reaches altitudes of 1000 feet and returns safely via streamer recovery.

Length: 12.25" Dia. 0.736" Wt. 0.79 oz.

ENGINES: 1/2A6-2(1st Flt.), A8-3, B4-4, B6-4, C6-5

No. 1938 \$3.59



SKINNY MINI

SKILL LEVEL 1 Long and lean, this miniengine sport flier is almost 2½ feet tall. A 30" streamer provides gentle descents for flights over 700 feet.

Length: 29.4" Dia. 0.541" Wt. 0.53 oz.

ENGINES: 1/2A3-2T (1st Flt.), 1/2A3-4T, A3-4T, A10-3T.

No. 0880 \$4.19



WIZARD™

SKILL LEVEL 1 Simple and quick-to-assemble. One of the highest performing vehicles in Estes' fleet with its 1,600 foot altitude capability and huge 30" streamer recovery system that makes it easy-to-track.

Length: 12" Dia. 0.736" Wt. 0.79 oz.

ENGINES: 1/2A6-2, A8-3 (1st Flt.), A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7.

No. 1292 \$3.59

TECH-TIP™





Recommended for the Beginning Modeler.

FIREHAWK™

SKILL LEVEL 1 Over 21/2 feet tall this "Golden Bird" will soar to heights over 500 feet. An 18 inch parachute assures smooth landings. Length: 31.5" Dia. 1.637" Wt. 3.0 oz. ENGINES: B4-4, B6-4 (1st Flt.), B8-5, C6-5

No. 2014

\$10.99



MINI MEAN MACHINE™

SKILLLEVEL 1 Mini-powered version of our huge Mean Machine™ kit. Over 38 inches long and capable of flights over 700 feet. Length: 38.5" Dia. 0.736" Wt. 1.06 oz. ENGINES: 1/2A3-2T(1st Flt.), A10-3T.

No. 0865

\$7.19



SIZZLER™

SKILL LEVEL 1 High performance design for flights over 900 feet. A long bird that's great for demonstrations. Length: 23.5" Dia. 0.976" Wt. 1.41 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5

No. 1906

\$7.19



ALPHA™

SKILL LEVEL 1 The ideal kit for your first or second rocket. Swept-fin design makes it a really great performer. Features red, white, or blue plastic nose cone and balsa fins. Length: 12.25" Dia. 0.976" Wt. 0.8 oz. ENGINES: 1/2A6-2, A8-3 (1st Flt.), A8-5, B4-4. B4-6, B6-4, B6-6, B8-5, C6-5, C6-7 No. 1225

\$5.79



ROCKET RECOVERY



In parachute and streamer models, loosely crumple the recommended amount (about 21/2 times the body tube dia.) of flame-resistant recovery wadding in your rocket's body tube to protect the recovery system from the engine's hot gases.

Lightly dust parachutes with talcum powder to prevent sticking. Fold parachutes to form a spike, fold again, and wrap loosely with shroud lines. Fold streamers in half, then roll up. Place parachute or streamer in body tube above wadding. Put nose cone and coiled shock cord into body tube. Wadding, parachute or streamer, and nose cone must not fit tightly. The engine's ejection charge must deploy the recovery system to return your model

Engines, launch system, glue, and finishing supplies not included Avg. Ship. Wt. 10 oz.

Recommended for the Beginning Modeler.

LANCER TM

SKILL LEVEL 1 Watch this racy sport flier leap to altitudes of 800 feet and descend beneath a brightly colored parachute. Plastic fin unit makes assembly quick so you can get outside to launch faster. Length: 18" Dia. 0.976" Wt. 1.31 oz.

ENGINES: 1/2A6-2 (1st Flt.), A8-3, A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7.

No. 1993

\$5.39



DASHER™

SKILL LEVEL 1 Superb sport flier features 1000 foot flights and forward swept fins. Parachute recovery and a quick-release engine mount will make this one of your favorite flying models. Length: 16.875" Dia. 0.976"
Wt. 0.92 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-3, C6-5.

No. 1992 \$5.39



JAVELIN™

SKILL LEVEL 1 Big, big performance delivers sky-high flights over 1700 feet with a powerful "C" engine. Recovery via 12 inch streamer keeps wind drift to a minimum. Length: 11.5" Dia. 0.736" Wt. 0.57 oz.

ENGINES: 1/2A6-2 (1st Flt.), A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-5, C6-7

No. 2005 \$3.99



BLAZER™

SKILL LEVEL 1 Excellent beginner's model features die-cut fiber fins, red decal, streamer recovery and 1000 foot flights with a "C" engine. No painting required! Length: 12.75" Dia. 0.736" Wt. 0.71 oz.

ENGINES: A8-3 (1st Flt.), A8-5, B4-4, B6-4, B8-5, C6-5, C6-7.

No. 1956

\$3.59



Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 10 oz.



Recommended for the Beginning Modeler.

ЕСНО™

SKILL LEVEL 1 Forward-swept, elliptical fins lend futuristic appearance to this high-performance sport model. Flights over 1000 feet with a "C" engine and recovery via streamer. Length: 10.5" Dia. 0.736" Wt. 0.47 oz. ENGINES: A8-5 (1st Flt.), B4-4, B6-4, B8-5, C6-5, C6-7

No. 1950 \$3.79



MICRON™

SKILL LEVEL 1 This little rocket has all the extras. Powered by mini engines, Micron™ delivers great flights and returns to Earth via streamer recovery. Length: 8.25" Dia. 0.736" Wt. 0.50 oz.

ENGINES: 1/2A3-2T (1st Flt.), A3-4T, A10-3T

No. 0876 \$3.95



BIG BERTHA™

SKILL LEVEL 1 Big and burly with dramatic lift-offs, awesome flights, and huge 18" parachute recovery, this two foot tall model is everyone's favorite. Includes gigantic decal and die-cut fins.

Length: 24" Dia. 1.637" Wt. 2.2 oz.

ENGINES: A8-3, B4-2, B4-4, B6-2 (1st Flt.),

B6-4, B8-5, C6-5.

No. 1948 \$8.19



VIKING™

SKILL LEVEL 1 Great first or second model can be built with 3, 4, or 5 die-cut fiber fins You decide! Easy-to-build, no painting required and flights to 1000 feet! Length: 12.125" Dia. 0.736" Wt. 0.71 oz.

ENGINES: A8-3 (1st Flt.), A8-5, B4-4, B6-4,


B8-5, C6-5, C6-7.

No. 1949 \$2.99





ECHO™

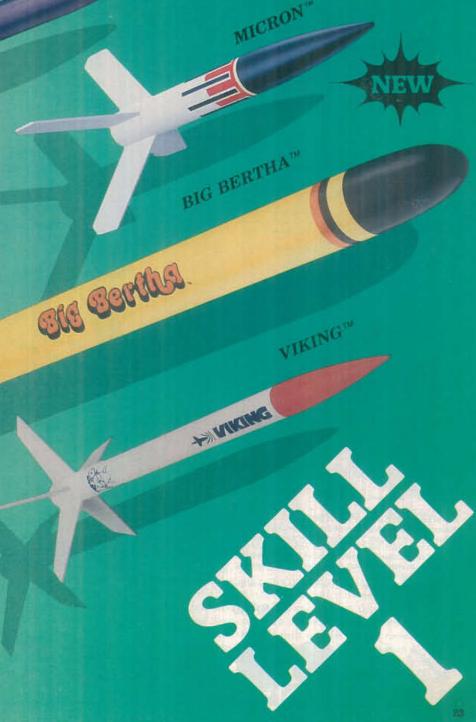

Engines, launch system, glue and finishing supplies not included. Avg. Ship. Wt. 10 oz.



YANKEE CLIPPER™ Rocket Kit

High performance 17.5 inch long model

Exclusive--Available only to Estes Space Program™ members

Dynamic red, white, and blue decor with great decals

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5.

ESTES SPACE PROGRAM CLOTH PATCH

Official club emblem on a beautiful cloth patch. Sew it on your favorite jacket., windbreake , cap, or shirt. This celorful patch looks great anywhere. The patch is 2 x 3 inches in size

FULL-COLOR ISSUE OF MODEL ROCKET NEWS MAGAZINE

DECAL SHEET

Full-color Estes Space Program emblems to use on your rockets. The decals for decurating your Yankee Clipper" are provided on this sheet

Many extra decals for making other rockets part of your official ESP** fleet are also provided. Both large and small decals for use on your range box and elsewhere are also provided.

MEMBERSHIP CERTIFICATE

Distinctive official membership certificate printed in three colors. Display it with pride! Looks beautiful on your wall. Official record for your achievements. Attach your official ESP~ Achievement Awards as you earn them

ESP™ MEMBERSHIP CARD

Official membership card identifies you as a member of the Estes Space Program". Official card also provides a handy record of your ESP" awards

ESTES SPACE PROGRAM STATIONERY

Special ESP" stationery is included.

ACHIEVEMENT AWARDS

These special ESP Achievement Awards are available only to Estes Space Program" members. Earn these distinctive awards as you learn more about model rocketry. Build and fly the different types of rockets included in the program to prove your expertise Display with pride the Achievement Awards you earn.

Four page letter welcomes you to the ESP" and explains the first 5 awards you can earn.

Ship. Wt. 16 oz.

\$8.69

No. 1443
















skills







TAKE REAL HIGH ALTITUDE PHOTOS!





ASTRO CAM™110

AERIAL CAMERA WITH DELTA II" LAUNCH VEHICLE

SKILL LEVEL 2 Experience the excitement of taking color photographs from hundreds of feet in the sky. Astro Cam 110's 1/500th second shutter speed is activated at ejection just prior to parachute deployment. Features include easyassembly, acrylic lens, plastic housing, glass first surface mirror, and high performance design. Easy to operate and shoots one full-color 110 photo per flight. Delta II™ features white body tube and pre-colored plastic fin-unit for stability. No painting required. Uses Kodak Kodacolor 110 color print film, ASA 400, or equivalent-Not Included. Film and developing are available locally. Camera not sold separately. Use Delta II™ as launch vehicle. Other launch vehicles are not recommended. Specifications - Camera with Launch Vehicle: Length: 19.1" Dia, 1.34" Fin Span 4.75" Wt. 3.75 oz. Camera Specifications: Length: 6.5 " Dia. 1.39" Wt. 1.36 oz. (without film). Wt. 1.76 oz. (with film) (Engines, launch system, film, glue and finishing supplies not included.) Ship. Wt. 14 oz.

ENGINES: C6-7 (1st Flt.).



No. 1327 \$33,29

Recommended for the Experienced Modeler.

FIREAERO™

SKILL LEVEL 2 Soaring to altitudes of 1200 feet, this beautiful sport flier includes balsa die-cut fins, quick-release engine mount, plastic nose cone, kit decal, and returns to Earth via 12" parachute. Length: 18" Dia. 0.976" Wt. 1.08 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4 C6-3, C6-5.

No. 1953 \$5.79



SUPERNOVA"

SKILL LEVEL 2 With this sleek model you can launch payloads up to 1800 feet or more. Launch it single stage or add another stage for greater altitude. See-through cargo area allows greater observation. Payloads are assured safe recovery via 12 inch parachute. Length: 27" Dia. 0.976" Wt. 1.7 oz. without payload ENGINES: Single Stage A8-3, B4-4 (1st Flt.), B6-4, B8-5, C6-5 or First Stage B6-0 (1st Flt.), C6-0

Second Stage A8-5 (1st Flt.), B4-6, B6-6, C6-7

No. 2011 \$8.99



BULL PUP 12D™

SKILL LEVEL 2 Scaled down version of U.S. Air Force air-to-ground missile features three-color decal, 800 foot flights and recovery via 12" 'chute. Length: 15.625" Dia. 1.325" Wt. 1.8 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5.

No. 1972 \$6.49 HAWKEYE™



SKILL LEVEL 2 Military styling, fiber fins, and three-color decal make this a fine addition to any model rocket collection. Mini-engine flights are out-of-sight! Length: 8.5" Dia. 0.541" Wt. 0.42 oz.

ENGINES: 1/2A3-2T (1st Flt.), A3-4T, A10-3T.

No. 0873 \$2.99



TECH-TIP™ PAYLOADS

Some model rockets have a special section used to carry cargo. This cargo or "payload" can be a camera, such as AstroCam" 110, to take aerial photos of your launch site. For competition, try launching a raw egg and retrieving it-UNBROKEN! Please do not launch mice, gerbils, and other rodents as the tremendous acceleration and g forces of model rocket flight could be very frightening and harmful to them.



Recommended for the Experienced Modeler.

MINI-SCALE COMBO™PAK

SKILL LEVEL 2 Two scale rockets in one package feature balsa nose cones, scale decals, die-cut fiber fins and break-apart recovery. Includes:

EXOCET™

Model of French ship-to-ship missile is capable of flights to 800 feet. Length: 9.5" Dia. 0.541" Wt. 0.3 oz.

ENGINES: 1/2A3-2T (1st Flt.), 1/2A3-4T, A3-4T, A10-3T.

I.Q.S.Y. TOMAHAWK

U.S. sounding rocket model delivers great performance with mini-engine power. Length: 10.9" Dia. 0.541" Wt. 0.25 oz. ENGINES: 1/2A3-2T (1st Flt.), 1/2A3-4T, A3-4T, A10-3T.

MINI SCALE COMBO™ PAK No. 0874 \$6.49

TORNADO™

SKILL LEVEL 2 Recovery with a new twist from flights to 1700 feet! When the engine's ejection charge is activated Tornado™ separates into two sections, each employing spinning helicopter recovery.

Length: 9.5" Dia. 0.736" Wt. 0.49 oz. ENGINES: 1/2A6-2 (1st Flt.), A8-3, A8-5, B4-4, B4-6, B6-4, B6-6, B8-5

No. 2004 \$3.49



HELIO*COPTER™

SKILL LEVEL 2

Launch this large, racy-looking rocket to altitudes over 800 feet and watch the excitement! The nose cone separates, flips over, and three bright red propeller blades spread and begin whirling faster and faster to assure the nose cone's safe recovery. A 12 inch parachute is ejected and the rocket body begins a gentle descent. Length: 25.4" Dia. 1.346" Wt. 2.89 oz. ENGINES: C6-3 (1st Flt.), C6-5

No. 1995 \$9.29



Engines, launch system, glue and finishing supplies not included. Avg. Ship. Wt. 12 oz.



Recommended for the Experienced Modeler.

FOX FIRE™

SKILL LEVEL 2 In the not-so-distant future interplanetary fighter ships may resemble this fantastic model able to achieve altitudes over 1000 feet. Length: 13.6" Dia. 0.736" Wt. 0.69 oz. ENGINES: A8-3(1st Flt.), A8-5, B4-4, B4-6, B6-4, B6-6, B8-5, C6-3, C6-5, C6-7 No. 1941

\$4.69



MINI TRI PAK

SKILL LEVEL 2 Three unique rocket kits in one package - for one low price! Includes:

STAR SEEKER™

Interstellar speeder for short hops between galaxies. Mini-power boosts it near 1500 feet. The model breaks apart into two connected pieces for safe recovery. Length: 6.9" Dia. 0.5" Wt. 0.26 oz. ENGINES: 1/2A3-2T (1st Flt.), 1/2A3-4T... A3-4T, A10-3T.

STING RAY

Two-stage mini performance. Out-of-sight flights to 2500 feet! Length: 8.4" Dia. 0.5" Wt. 0.33 oz.

ENGINES: First Stage: A10-0T (1st Flt.) Second Stage: 1/2A3-2T (1st Flt.), 1/2A3-4T, A3-4T, A10-3T,

S.C.R.A.M.

Military styled surface-to-air missile. Flights over 1000 feet. Break-apart recovery. Length: 7.3" Dia. 0.5" Wt. 0.29 oz. ENGINES: 1/2A3-2T (1st Flt.), 1/2A3-4T. A3-4T, A10-3T.

MINI TRI PAK™ No. 0866

TECH-TIP

\$7.19

RECOVERY SYSTEMS

Most recovery systems depend on drag (air resistance) to slow the rocket. Each changes the model from a streamlined object to one which the air can "catch against" and retard its descent. Six main recovery methods are used by model rocketeers: 1. Featherweight Recovery 2. Tumble Recovery 3. Streamer Recovery 4. Parachute Recovery 5. Helicopter Recovery 6. Glide Recovery.



MINI TRI PAK" Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 11 oz.

SKILL LEVEL 2 Recommended for the Experienced Modeler. SPACE SHUTTLE COLUMBIA SKILL LEVEL 2 Beautiful semi-scale model of America's newest spaceship. Assembles easily with molded plastic nose cone and orbital maneuvering system pods. Spectacular flights over 500 feet with 18" parachute recovery. Makes a great display model too! Length: 10.7" Wing Span 8.125" Dia. 1.637" Wt. 1.98 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5. No. 1385 ESTES INDUSTRIES \$11.79 SENTINEL[™] SKILL LEVEL 2 Air-to-air missile decor lends a scale appearance to this large model. Powerful lift-offs add realism and the model's weight requires a big 18 inch parachute for reliable recovery. Length: 27.625" Dia. 1.637" Wt. 2.7 oz. ENGINES: A8-3, B4-4 (1st Flt.), B6-4, C6-3, P.O. C6-5. No. 1987 Box 227, \$9.29 IRIS™ SKILL LEVEL 2 The Iris sounding rocket was produced in the early 1960's by Atlantic 1295 H Street, Penrose, Richfield Corporation. Estes' 1/13 scale model features a two-piece body to simplify painting, flights to 850 feet and recovery via 30" streamer. Length 17.125" Dia. 0.976" Wt. 1.13 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5. C6-5 No. 2007 \$5.49 SDI SATELLITE™ (\$10.00 Minimum SKILL LEVEL 2 In the future satellites using CO 81240 powerful particle beam technology, capable of destroying the most sophisticated weaponry. may be an important part of our strategic defense. Estes' model includes plastic "satellite" parts, die-cut balsa "solar panels", "orbital" flights to 250 feet, and recovery via 12 inch parachute. Length 13" Dia. 2.75" Wt. 2.47 oz. ENGINES: B4-2 (1st Flt.), B4-4, B6-2, B6-4, B8-5, C5-3, C6-3, C6-5 No. 2003 \$9.29 Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 12 oz.

7000700400 TOTAL Amount This Order

YOUR

ORDER

For Credit Card Orders.

it appears on card.)

Card Holder's Signature

SERVICE EST 面 FOR STEPS EASY S ш Ξ **≷** 0 0 ш 딾 ٥ α o ≥ O H

IMPORTANT

Estes model rocketry products are recommended for ages 10 through adult. Adult supervision is suggested for those under 12 years of age when flying model rockets This order form replaces all previous order forms. Please be sure that you use the correct and full product number for each item when you order. All orices and terms are subject to change without notice. prices and terms are subject to change without notice. WHEN SENDING ORDER BE SURE TO GIVE ZIP CODE IN YOUR ADDRESS.

POSTAGE

Estes Industries ships all retail orders POST-PAID in the U.S. by Parcel Post or UPS.

PAYMENT ON ORDER

Full payment must accompany all orders. Please send all remittances by either check or money order, both for your protection and our convenience. If you do send currency, be sure your envelope has sufficient postage, is properly senled, and is addressed correctly to assure delivery. Coins should be attached to a separate sheet of paper, not to the order blank. Use a single strip of masking tape to hold the coins in place. Avoid the mailing of coins, as they are easily lost in the mail. We cannot assume responsibility for the loss of coins, currency, or order in the mail. Remember to include sufficient funds with your order. For your protection, we do not ship orders C.O.D. Proper attention to these details will result in speedier service for you.

Your order may, for various reasons, have to be ship-ped in more than one package. If all of your order does not come at the same time, please be patient and give the balance of the order time to arrive.

NOTE: All foreign orders are subject to acceptance by Estes Industries. Please write for further informa-tion.

FOR FASTEST SERVICE

We normally ship your merchandise soon after the order is received. When your need for the product is urgent you may phone in your order if you are charging the order to your VISA or MasterCard.

For fastest delivery, you may request a shipment by UPS (United Parcel Service). You can request UPS shipment whether your order is phoned in or sent by mail. We <u>must</u> have a street address for UPS ship-

"Estes is an equal opportunity employer."

900107C

Your Estas product is warranted against defects in materials or work-manship for one year from the date of original purchase. Any Estas product, except computer software, ranty period will be repaired or re-placed, at Estes' option and at no charge to you, provided it is returned to Estes with proof of purchase. This warranty does not cover inci-dental or consequential damage to uct, except computer software, which, because of a manufacturing mistake, malfunctions or proves to be defective within the one-year war-ESTES. WARRANTY

tal or consequential damages, so the persons or property caused by the use, abuse, misuse, failure to comply exclusion may not apply to product. Some states do not allow the exclusion or limitation of incidenwith operating instructions, or imof the

legal rights and you may also have other rights which vary from state

ent under this ase return the defective part of your Estes product to: Estes Industries, Customer Service Departent, Penrose, Colorado 81240. arranty, ple

INSERT IN ENVELOPE TEAR HERE AND

HAVE YOU ORDERED EVERYTHING YOU NEED?
IS YOUR MONEY ORDER OR CHECK ENCLOSED?
DID YOU CHECK YOUR MAILING ADDRESS AND ZIP? DID YOU FILL IN ALL CREDIT CARD INFORMATION?

INSERT IN ENVELOPE TEAR HERE AND

Y FOLD HERE AND SEAL

8. Which do you enjoy more? ☐ Building Rockets [] Flying Rockets Thank you for ordering—Help Us To Serve You Better— L.A. Is this your first Estes mail-order? □ Yes □ No 8. Which do y B. Is this your first model rocket purchase? □ Yes □ No □ Building

- ☐ By mail only ☐ By mail and at a local store ☐ At a local store only

 3. Which member of your family. If any, helps you with your
 - model rocket purchases and activities? □ □ Sister □ Mother □ Wife □ Husband □ Son □ Daughter □ Other

- Pinstic Nose Cones or - Balsa Nose Cones

Which do you prefer?

=

☐ Plantic Fine or ☐ Balus Firm

Which areas of model rocketry interest you?

2

C) Clidens

10 Have you ever participated in a model rocket demonstration? □ Yes □ No

- □ 10-30 □ More

- Are you a member of any of the following clubs?

 □ Entes Space Program = □ NAR □ 18A □ GSA

 □ Young Astronauts □ YMCA or YWCA □ 4-H □ CAP

 □ Church Club □ Other

- 2. How do you usually obtain your model rocket supplies?

9. Have you ever competed in a model rocket contest."

Yes No

- How many rackets have you built? □ 0 □ 1-5 □ 6-10
- sckets have you launched? [] [0 [] 1-5 □ 6-10 □ 10-30 □ More
 - ☐ Under 3 mos, [] 3 mos, to 1 year [] 1-3 years □ 3 years or more 9

- dore Which type of computer do you have? □None □Apple He □McIntosh □Co 13

Competition Flying

Launch Systems

Drag Redu

LIBM

- Other
- 6 Please list
- THANK YOU
- Send a Friend a Catalog!

C Photography
D Payloads
D Designing
U Plying just for fun

Finishing Techniques

Multi-Staging Scale Models Please rush a "New" ESTES Model Rocketry Catalog to

FRIEND'S NAME

SIZ STREET STATE CITY



To List All Special Offers Be Sure

Place Stamp Here



RIES

Penrose, P.O. Box 227, "Model Rocket Capitol 1295 USA H Street of the World"

Recommended for the Experienced Modeler.

CALYPSO™

SKILL LEVEL 2 Swept fins, boat tail, and ogive nose cone make this model an aerodynamic super flier. A 30 inch streamer assures safe landings from flights over 1000 feet with a "C" engine.

Length 16.5" Dia. 0.976" Wt. 0.99 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5

No. 2006 \$5.49



SKILL LEVEL 2 Resembles an experimental NASA aircraft. Perhaps this one will travel beyond the Earth on voyages not yet planned. Your model will produce test flights over 700 feet and return to Earth via an 18 inch parachute recovery system.

Length 17.25" Dia. 1.325" Wt. 1.68 oz. ENGINES: A8-3, B4-4 (1st Flt.), B6-4, B8-5, C6-3, C6-5.

No. 2000 \$7.19

RAIN MAKER™

SKILL LEVEL 2 Resembles a staged sounding rocket like those used in the 50's and 60's for cloud-seeding experiments. Flights over 600 feet are possible and recovery is via 12 inch parachute.

Length 23.625" Dia. 1.325" Wt. 1.48 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5

No. 2009 \$6.95

RANGER™

SKILL LEVEL 2 Big and powerful, with twocolor decal, and huge 18" recovery 'chute. Ranger™ achieves 1200 foot altitudes easily. Length: 22.125" Dia. 1.325" Wt. 1.6 oz. ENGINES: D12-5 (1st Flt.), D12-7

No. 1955 \$8.19



TECH-TIP



LAUNCH PADS

Launch pads serve many uses. The launch rod guides the rocket's first few feet of flight until the rocket is moving fast enough for the fins to provide gui-dance. The blast plate deflects the engine's hot gases away from the launch pad and the ground. The safety cap is always kept on the rod except during actual launch to prevent injuries. Some launch pads tilt to direct the rocket into the wind so the wind will return it. Never tilt the rod more than 30° from vertical. Don't launch if it's too windy. Some launch pads also accommodate Maxi" Rods (#2244) for giant models.



Recommended for the Experienced Modeler.

DER V-3™

SKILL LEVEL 2 A two foot rocket, comical decals, "D" power lift-offs, and a large recovery parachute add up to big, big fun! 3/16" Maxi Rod (#2244) required for launch. Length: 24" Dia. 2.6" Wt. 4.4 oz.

ENGINES: D12-3 (1st Flt.), D12-5

No. 1970 \$10.89



MEGA SIZZ'™

SKILL LEVEL 2 Huge sport flier lifts-off the pad with a mighty roar to climb over 1000 feet in seconds. Great decals, a quick-release engine mount, and an 18 inch parachute make this a very sharp model. A 3/16″ Maxi™ Rod (#2244) is required for launch. Length: 34.25″

Dia. 1.637" Wt. 3.18 oz. ENGINE: D12-5.

No. 1998

\$10.89



MEAN MACHINE™

SKILL LEVEL 2 Tallest rocket in the Estes fleet. "D" engine powered for spectacular flights over 800 feet. Over 6 feet long with giant 24" 'chute. Easy-to-assemble for a really great looking bird. Uses 3/16" launch rod. Length: 78.75" Dia. 1.637" Wt. 5.8 oz.

ENGINE: D12-5

No. 1295 \$16.29



SUPER BIG BERTHA™

SKILL LEVEL 2 A really big Big Bertha"! Over 3 feet tall and more than 8 inches around, you'll need a "D" engine to lift it. An 18 inch parachute brings it back gently. You'll love to fly this model over and over. A 3/16" Maxi" Rod (#2244) is required for launch.

Length: 36.5" Dia.: 2.56" Wt.: 6 oz.

ENGINE: D12-5

No. 2018 \$21.99



Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 16 oz.



Recommended for the Experienced Modeler.

EGGSPRESS™

SKILL LEVEL 2 Egg lofter sport rocket is great for contests, science fair projects, and "Eggsperiments"! This heavy duty vehicle can be flown with or without an "Eggload". The cargo bay is so big you can launch a large egg in it. And...there's an 18 inch parachute for "Eggstra" soft landings. However, if the 'chute doesn't open the Yolk's on you!

Length: 21.5" Payload Dia. 2" Wt. 2.51 oz. ENGINES: Without Egg B4-2 (1st Flt.), B6-2, B8-5, C6-5.

With Egg C5-3 ONLY!

No. 1996 \$9.29



STARBIRD™

SKILL LEVEL 2 This sleek, interstellar spaceship traverses the galaxy, seeking, observing, and exploring the farthest reaches. Our model flies over 1100 feet and descends gently to Earth via 12" parachute.

Length: 19.5" Dia. 0.976" Wt. 1 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, C6-3, C6-5.

No. 1954 \$5.79



NOVA PAYLOADER™

SKILL LEVEL 2 Cargo carrier contains clear payload bay. Great for experiments and science projects. Flies to altitudes over 1000 feet high, deploys 12" recovery parachute, and descends slowly to the ground, ready to carry your next payload aloft. Length: 21.125" Dia. 0.976" Wt. 1.33 oz.


ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5,

No. 1960 \$7.19

38



Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 12 oz.

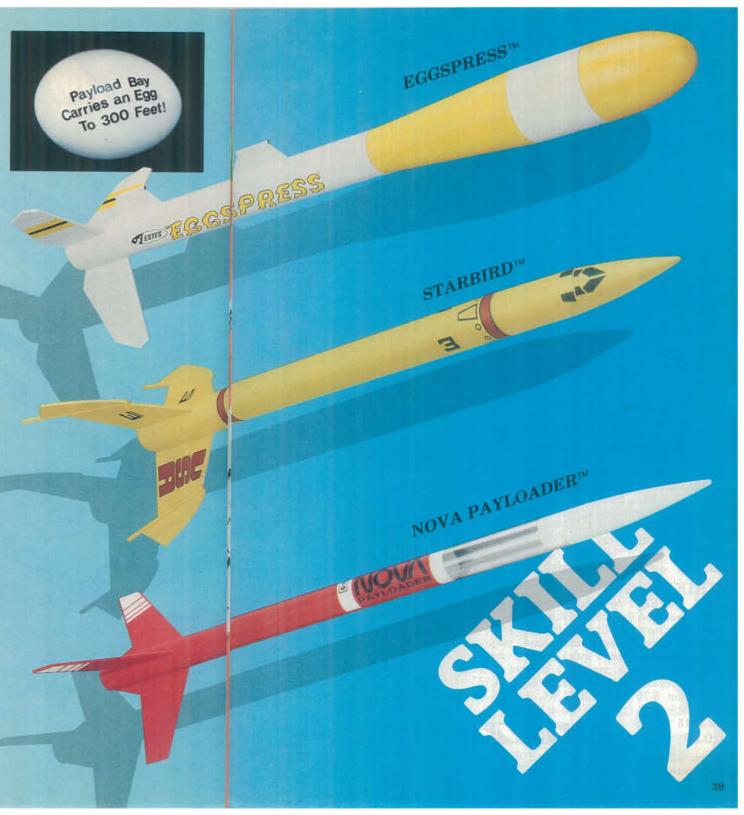

Recommended for the Advanced Modeler.

STAR RIDER™

SKILL LEVEL 3 This messenger of the star systems incorporates a circular nagivational system. Your model will fly over 1100 feet high and return to Earth under a 12 inch parachute. Length 16.062" Dia. 0.976" Wt. 1.7 oz. ENGINES: A8-3, B4-4 (1st Flt.), B6-4, B8-5,

C6-5 No. 2010 \$7.79



ARGOSY"

SKILL LEVEL 3 Galactic deterrent of everthreatening invasions, this strike fighter is equipped with laser weaponry, time warp drive and deionizing technology. Invisible on all known scanners, Argosy™ can strike and evade retaliation easily. Launch your model to 900 feet. Landings are smooth with a 12" parachute!

Length: 18.5" Dia. 0.976" Wt. 1.43 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, C5-3, C6-3, C6-5.

No. 1988 \$5.99











HERCULES™

SKILL LEVEL 3 Clear payload section highlights this two-stager. Sleek design that can be flown as a single or two-stage model. Flights over 2,500 feet!

Length 21.6" Dia. 0.976" Wt. 1.84 oz.

ENGINES: Single Stage: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5 Upper Stage: A8-5 (1st Flt.). B6-6, B8-5, C6-7

No. 1377 \$9.29



STRIKE FIGHTER"

SKILL LEVEL 3 Aerospace rocket plane is sleekly designed for multiple mach-speeds and strike fighting capability. Model includes seethrough canopy, plastic nose cone, pre-cut balsa wood fins, and a quick-release engine mount. An 18 inch parachute assures great landings from flights to 500 feet. Length 14.75" Wing Span 8.75" Dia. 1.325" Wt. 2.37 oz. ENGINES: B4-4 (1st Flt.), B6-4, C6-3

No. 2015

\$10.99



Engines, launch system, glue and finishing supplies not included. Avg. Ship. Wt. 12 oz.



Recommended for the Advanced Modeler.

RECRUITER™

SKILL LEVEL 3 First line defensive MIRV interceptor. Estes' model features flights over 550 feet high in six seconds.

Length 25" Dia. 1.637" Wt. 2.58 oz.

ENGINE: B4-4, B6-4, C6-5

No. 2013 \$9.99



COMANCHE - 3TM

SKILL LEVEL 3 Big three-stager with mighty "D" powered booster. Can be flown in single, two-stage or three-stage configurations. Incredible flights over 2,600 feet.

A 3/16" Maxi Maxi Rod (#2244) is required for launch.

Length: 41" Dia. 0.976" Wt. 2.08 oz.

ENGINES: Single Stage: A8-3 (1st Flt.), B4-4, B6-4, B8-5, C6-5.

Upper Stage: A8-5 (1st Flt.), B4-6,

B6-6, C6-7. Second Stage: B6-0, (1st Flt.),

C6-0.

First Stage: D12-0

No. 1382 \$9.29



S.W.A.T.™

SKILL LEVEL 3 Huge hypersonic fighter model features camouflage decor scheme, flights over 400 feet, and a big 18 inch parachute. A 3/16" Maxi" Rod is required for launch.

Length: 34" Fin Span: 8.75" Dia. 1.637"

Wt. 4.06 oz.

ENGINE: C6-3 (1st Flt.), C6-5

No. 2017 \$16.99



NIMBUS™

SKILL LEVEL 3 Above the clouded atmosphere, this winged spaceship patrols the terran boundaries. Our model soars to 850 feet altitudes and lands gently with a 12" parachute.


Length: 17.375" Dia. 0.976" Wt. 1.21 oz.

ENGINES: B4-4 (1st Flt.), B4-6, B6-4, B8-5, C5-3, C6-3, C6-5, C6-7.

No. 1971

\$5.99

Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 12 oz.

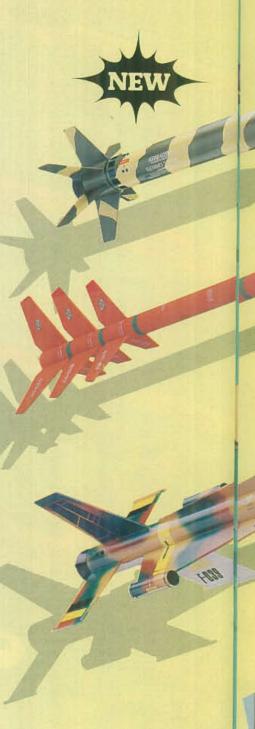



Recommended for the Advanced Modeler.

SR-71 BLACKBIRD™

The first SR-71 aircraft were delivered to Strategic Air Command in 1965 for reconnaissance work. Built almost entirely of titanium (as strong as, but lighter than steel), Blackbird weighs about 140,000 lbs., has a wingspan of 55 ft., and is 107 ft. long. Able to achieve speeds of more than 2,000 mph and altitudes of more than 80,000 ft., the craft carries a crew of two with a range of 2,000 or more miles. SR-71 is painted black or dark blue to reduce the heat from high-speed friction.

SKILL LEVEL 3 Our nation's super highaltitude reconnaissance plane flies at ultrasound speeds. So high-tech nearly all information about this plane is classified. The Estes scale model features the same state-of-the-art appearance. Over 1½ feet long SR-71 Blackbird" flies to 900 foot altitudes and lands via 18" parachute. Length: 19" Dia. 0.976" Wt. 3.2 oz.

ENGINES: B4-2(1st Flt.), B6-2, B6-4, B8-5, C6-5

No. 1942 \$12.89



STEALTH™

SKILL LEVEL 3 Radar invisible fighter from the future closes in on its opponents from seemingly nowhere. Outfitted with laser weaponry it seeks and destroys in ultimate silence. Our model can reach altitudes up to 900 feet. Length: 16.25" Dia. 1.125" Wt. 2.3 oz.

ENGINES: A8-3, B4-4 (1st Flt.), B6-4, C5-3, C6-3, C6-5.

No. 1929

\$8.19



PHOENIX™

SKILL LEVEL 3 Big semi-scale model of the famous Phoenix air-to-air supersonic missile. Impressive in the air and on display. Single "D" powered engine provides a slow, realistic lift-off and flights over 600 feet. A 3/16" Maxi "Rod (#2244) is required for launch.

Length: 30" Dia. 2.60" Wt. 6.6 oz.

ENGINE: D12-3

No. 1380 \$16.29



Engines, launch system, glue, and finishing supplies not included. Avg. Ship. Wt. 12 oz.



Recommended for the Advanced Modeler.

NASA X-15™

X-15 was one of a series of experimental rocketpowered aircraft used to research reentry from extreme altitudes, pilots' physiological behavior at super sonic speeds, and aerodynamic heating and skin friction. X-15 flew to an altitude over 67 miles high to a speed of Mach 6.7 on October 3, 1967.

SKILL LEVEL 3 Our sport scale version of the famous rocket-powered X-15 aircraft features plastic nose cone and canopy plus die-cut balsa fins. A 10 inch recovery parachute returns your NASA X-15™ rocket plane to Earth after each realistic flight.

Length: 12.75" Dia. 1.637" Weight 1.71 oz.

ENGINE: A10-3T.

No. 0889 \$6.49



X-16™

SKILL LEVEL 3 Far in the future the Air Force may be flying this experimental model into Earth's outer atmosphere to test hyper velocity near space travel. Our version can fly to 1.000 feet.

Length: 17.25" Dia. 0.976" Wt. 1.45 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-2 B6-4,

B8-5, C6-5. No. 1933

\$7.19







NIKE APACHE™

This two-stage, solid propellant vehicle is one of the United States' smallest and most used scientific research sounding rockets. The first stage is a US Army Nike M5E1. The second stage Apache is produced by Morton-Thiokol. A maximum length of 28 feet. allows Nike Apache to be fired from a transportable launcher, even from aboard a ship! This enables other nations to use Nike Apache, too. Delivering a combined thrust of 51,000 pounds and carrying nominal payloads of 60 pounds, Nike Apache is used for space research 50-150 miles above Earth.

SKILL LEVEL 3 Scale (1 to 12.25) model of U.S. sounding rocket includes two-stage appearance, three-color decal, and 12" parachute recovery. Reaches altitudes over 900 feet. Length: 22.875" Nike Dia. 1.325"

Apache Dia. 0.541" Wt. 1.55 oz.

ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5,

C6-5, C6-7. No. 1957 \$7.19







Engines, launch system, glue and finishing supplies not included. Avg. Ship. Wt. 12 oz.



Recommended for the Advanced Modeler.

PATHFINDER™

SKILL LEVEL 3 Over 31/2 feet tall, this magnificent model resembles a real sounding rocket used in testing upper atmospheric conditions. A big 'D' engine is required to launch this rocket to altitudes over 800 feet. Two 12 inch parachutes are necessary to ensure recovery. A 3/16" Maxi™ Rod (#2244) is required for launch.

Length: 42.25" Dia. 1.637" Wt. 3.18 oz.

ENGINE: D12-5.

No. 1997 \$10.39



CORSAIR™

SKILL LEVEL 3 Exiled to distant outlying planets, the galaxy's privateers fly their spaceships throughout the star systems, preying on slower freightliners. Dark and sleek, Corsair's design has evolved from the necessity to outmaneuver vengeful victims. The model features swept-wing design, flights to 700 feet. and descent via 12 inch parachute.

Length: 12.35" Dia. 0.976" Wt. 1.59 oz. ENGINES: A8-3 (1st Flt.), A8-5, B4-4, B6-4, B8-5, C6-5.

No.1999



\$6.49

RAM JET™

SKILL LEVEL 3 This ducted jet rocket is launched from the air for long range use in the upper atmosphere. Lifting off to 800 feet. Ramjet™ is recovered via 12 inch parachute system. Length: 15.25" Dia. 1.325" Wt. 1.24 oz. ENGINES: A8-3 (1st Flt.), B4-4, B6-4, B8-5,

C6-5 No. 1994 \$5.39





Engines, launch system, glue and finishing supplies not included. Avg. Ship. Wt. 12 oz.





Rocketry, 2140 Colburn Dr., Shakopee, MN 55379. Your

membership includes many benefits such as discounts,

insurance, and a monthly subscription to American

CORSAIR™









Recommended for the Master Modeler.

GEO SAT LV™

SKILL LEVEL 4 Heavy-lift launch vehicle for large satellite payloads. Kit features simulated strap-on solid rocket boosters, seethrough payload section with a highly detailed visible satellite, and an 18" parachute for reliable recovery. Realistic decor and 2 feet 4 inches of rocket make lift-offs impressive. Length: 28" Dia. 1.637" Wt. 4.3 oz.

ENGINES: B4-2 (1st Flt.), B6-2, C5-3, C6-3

No. 1977 \$14.69



BLACK BRANT II

An outgrowth of Black Brant I program, Black Brant II's payload capacity was increased to 6.2 cu. ft. by changing the nose cone's shape. The airframe, (17.2" dia. x 27' 8" tall), was stabilized by 3 fixed fins. Total fin span was 39". The motor delivered 16,000 pounds of thrust over a 25 second burn time. Total vehicle weight with propellant was 2,642 lbs. First flight was October, 1960.

Used by the Canadian Armament Research and Development Establishment for upper atmosphere research studies, Black Brant IIs were fired mostly in Canada's Northlands, carrying up to 150 pounds of payload to altitudes of 100 statute miles.

SKILL LEVEL 4 Beautiful model of Canadian sounding rocket features a 1 to 13 scale ratio. This powerful D-engine model can fly well over 1200 feet.

Length 24.875" Dia. 1.325" Wt. 2.29 oz. ENGINES: D12-5 (1st Flt.), D12-7

No. 1958 \$9.79



JUPITER-C™

The first U.S. Space Launch Vehicle was designed, built, and flown under the direction of Dr. Wernher von Braun. The thrust from Jupiter-C's four stages produced an orbital velocity of 18,000 mph.

Explorer I was the first U.S. Earth Satellite. The instrumentation was designed by Dr. James Van Allen. The satellite was constructed at Jet Propulsion Laboratory under the direction of Dr. William Pickering.

Jupiter-C/Explorer-1 lifted off from Cape Canaveral at 10:48 P.M. EST January 31, 1958. The flight resulted in the discovery of the Van Allen Belts, one of the outstanding discoveries of the International Geophysical Year.

SKILL LEVEL 4 Estes' model of this historic rocket is 1/35th scale. The Explorer-1 Satellite is included but should be removed for flight. Other features are realistic lift-offs and reliable recoveries via 18" parachute.

Length 24.5" Dia. 2.04" Wt. 3 oz. ENGINE: C5-3 (1st Flt.)

No. 1976 \$13.69





SKILL LEVEL 4 Recommended for the Master Modeler.

SPACE SHUTTLE™

On a standard mission, the Orbiter will remain in orbit for 7 days, return to the Earth, land like an airplane, and be readied for another flight in 14 days. It can deploy and retrieve satellites and can place deep-space vehicles in their initial low-Earth orbit.

The Shuttle is comprised of the following three main units: · Two solid rocket boosters (SRB's) which have a sea level

thrust of 2,600,000 pounds each.

• The orbiter which is 121 long with a wing span of 79' weighs about 150,000 pounds without fuel. It has a payload bay 60' long and 15' in diameter. Payload cap-

acity is 65,000 pounds.

. The external tank (ET) is 154' long and 28.6' in diameter. At lift-off the tank contains 1,550,000 pounds of liquid hydrogen and oxygen. These are in separate compartments of the tank and are fed to the orbiter's three main rocket engines which have a thrust of 470,000 pounds each. The tank is not reusable.

Maximum altitude of the Space Shuttle is 600 miles.

SKILL LEVEL 4 Dramatic 1/162nd scale reproduction of America's premiere space vehicle. Designed as a reusable near space transportation system with satellite deployment and retrieval capability. Delivers really spectacular flights. Semi-scale orbiter employs glide recovery just like the real thing while boosters and external tank return via 18" parachute recovery. Our model features special stabilizer fins for atmospheric flight which remove easily for display. Kit components include injection molded, vacuformed plastic and die-cut parts. Incredible display model with authentic NASA decor, Shuttle Length 13.6" Dia. 2.04" Orbiter Length 9.0" Orbiter Wingspan 7.1" Wt. 4.37 oz. ENGINES: C5-3 (1st Flt.), C6-3.

No. 1284 \$21.29



MERCURY REDSTONE™

Between 1953 and 1958 Redstone had proven to be a reliable flight vehicle. Therefore, it was selected as the vehicle to carry the first American into sub-orbital flight. On May 5, 1961, Redstone lifted the Mercury capsule "Freedom 7" with Alan Shepard, Jr. inside to an altitude of 116.5 statute miles and traveled 302.8 miles down-range. The flight lasted 15 minutes and 22 seconds. Mercury-Redstone stood 83 feet tall, weighed (with fuel) 66,000 lbs. and delivered 78,000 lbs. of thrust

SKILL LEVEL 4 Historical 1/35 scale model of the Mercury sub-orbital rocket used to launch Alan Shepard into space flight May 5, 1961. Authentic detailing includes large decal and injection molded Mercury capsule and tower. Rocket and capsule each return to Earth via 12" chute recovery. Length: 28.75" Dia. 2.04" Wt. 3.0 oz. ENGINE: C5-3 ONLY

No. 1921 \$15.29





Recommended for the Master Modeler

TITAN IIIE

SKILL LEVEL 4 Big and exciting, this challening rocket is a 1/73rd scale model of Martin Marietta's Titan IIIE. Plastic engine display nozzles and balsa wood stabilizing flight fins are included. Both are removable. A 3/16" Maxi™ Rod is required for flight.

Length: 28" Dia. 2.22" Wt. 6.0 oz. ENGINES: D12-3 (1st Flt.), D12-5

No. 2019 \$25.99



SATURN VTM

Engineers at the Army Ballistic Missile Agency in Huntsville, AL in 1957 proposed a large rocket named Juno V. In 1958 the project was approved. NASA was activated that same year. In 1959 the project was renamed Saturn and transferred to NASA. First successful flight of the Saturn V was on November 9, 1967.

The first stage of the Saturn V generated 7,500,000 pounds of thrust with its cluster of five F-1 engines burning kerosene and liquid oxygen. The second stage was powered by five J-2 engines producing a total of 1,000,000 pounds of thrust. The third stage used one J-2 engine to provide 200,000 pounds of thrust. The third stage engine had a restart capability.

The Saturn V permitted weights of up to 280,000 pounds to be placed in Earth orbit. The Saturn V launched the nearly 100,000 pound Apollo 11 spacecraft into lunar trajectory which resulted in the first manned lunar landing in July 1969. The Apollo-Saturn V was 363 feet tall and weighed 6,000,000 lbs. fully fueled.

SKILL LEVEL 4 This is the finest 1/100 scale model rocket of the Mighty Saturn V™ ever designed. Keith Niskern, designer of the first and most famous Saturn V™ model, has completely redesigned and refined the model.

Scaled from official NASA drawings, the finished model is 43½ inches tall and lifts off to more than 100 feet with one powerful D12-3. The bottom section is lowered gently with two huge 24 inch parachutes and the upper section is recovered via special recovery harness and

18 inch parachute.

The internal structure has been redone to ease assembly and assure safer and more realistic recoveries. The balsa fins have been moderately overscaled for stable flight. No fin extensions or other alterations are required.

Improved and amplified detailing includes an Apollo capsule, escape tower, and main engine display nozzles which remove easily for flight. Truly a magnificient scale reproduction.

A 3/16" Maxi™ Rod (#2244) is required for launch. Length 43.25" Dia. 3.938" Wt. 10.2 oz. ENGINE: D12-3 ONLY

No. 2001

\$52.29





IGNITERS: Add increased reliability at lift-off with Estes Igniters. Features easy engine installation and is suitable for all Estes launch control systems. Unique four element design makes it the most dependable igniter made. (Six per pkg.) Ship Wt. 1 oz. No. 2301

RECOVERY WADDING:

Provides protection from hot ejection gases for parachutes and streamers. Each package contains approximately 75 4½" squares—enough wadding for up to 25 flights. Instructions for installation are included on each package. Ship Wt. 6 oz.

No. 2274

\$1.89

BLAST-OFF™ FLIGHT PAK

Ideal engine assortment. Features 24 of the most popular Estes model rocket engines, plus Igniters and Recovery Wadding. Priced at an excellent savings. Includes six each A8-3, B6-4, C6-5, and C6-7 high performance model rocket engines, one pkg. Recovery Wadding, and 30 Igniters. Ship. Wt. 1 lb. 8 oz.

No. 1672

\$23,89



MODEL ROCKET ENGINES



A Letter indicates total impulse or total power produced by the engine. Each succeeding "letter" has twice the power of the previous letter. (Example: "B" engines have twice the power of "A" engines, etc.)

8 Number shows the engine's average thrust in newtons or the average push exerted by the engine (4.45 newtons = 1 lb.)

3 Number of seconds between the end of thrusting and the ejection charge.

Average thrust = newton-seconds divided by thrust duration.

Estes model rocket kits use the three sizes of engines shown here. Kits with recommended engines ending with the letter "T" use mini-engines. Kits where "D" engines are recommended use the large "D" size. All other kits use the regular size engines.

Estes model rocket engines have been proven consistent and reliable in more than 300,000,000 launches.

The design and development of the Estes model rocket engine was the real beginning of the safe, educational and fun activity model rocketry has become.

Thirty years of Estes engineering has produced today's safety-proven model rocket engine.

Manufactured under strict, quality-controlled conditions within exacting tolerance limits, (More than 3% of all Estes engines are static-tested.) Estes engines comply with the codes of the National Fire Protection Association and are certified by the National Association of Rocketry.

MODEL ROCKET ENGINES

| Prod. No. | Engine Type | Prices 3 for | Total II | N-sec | Time Delay (±15%) | Max. Lift Wt. | Max. Thrust | Thrust Duration | We | itial right | W | pella: eight |
|--------------|---|-------------------|----------|--------|-------------------------|---------------------|----------------|--------------------|---------|----------------|--------|-----------------|
| 1593 | 1/2A6-2* | \$3.30 | - | | Date of Cold | 7276 | - 12 | | Ož. | G. | Oz. | 1 |
| 1598 | | The second second | 0.28 | 1.25 | 2 sec. | 2.5 oz. | 46 oz. | 0.20 sec. | 0.53 | 15.0 | 0.055 | 1. |
| 1601 | A8-3 | \$3.45 | 0.56 | 2.50 | 3 sec. | 4.0 oz. | 48 oz. | 0.32 sec. | 0.57 | 16.2 | 0.110 | 3. |
| 1602 | B4-2 B4-4 | \$3.45 | 1.12 | 5.00 | 2 sec. | 4.0 oz. | 48 oz. | 1.20 sec. | 0.70 | 19.8 | 0.294 | 8 |
| 1605 | THE CONTRACTOR OF THE PARTY OF | - | 1.12 | 5.00 | 4 sec. | 3.5 oz. | 48 oz. | 1,20 sec. | 0.74 | 21.0 | 0.294 | 8 |
| | B6-2 | \$3.45 | 1.12 | 5.00 | 2 sec. | 4.5 oz. | 48 oz. | 0.83 sec. | 0.68 | 19.3 | 0.220 | 6 |
| 1606 | B6-4 | \$3.45 | 1.12 | 5.00 | 4 sec. | 4.0 oz. | 48 oz. | 0.83 sec. | 0.71 | 20.1 | 0.220 | 6 |
| 1620 | B8-5* | \$3.45 | 1.12 | 5.00 | 5 sec. | 5.0 oz. | 5 lb. | 0.60 sec. | 0.68 | 19.3 | 0.220 | 6 |
| 1617 | C5-3* | \$3.70 | 2.25 | 10.00 | 3 sec. | 8.0 oz. | 5 lb. | 2.10 sec. | 0.90 | 25.5 | 0.450 | 12 |
| 1613 | C6-3 | \$3.95 | 2.25 | 10.00 | 3 sec. | 4.0 oz. | 48 oz. | 1.70 sec. | 0.88 | 24.9 | 0.440 | 12 |
| 1614 | C6-5 | \$3.95 | 2.25 | 10.00 | 5 sec. | 4.0 oz. | 48 oz. | 1.70 sec. | 0.91 | 25.8 | 0.440 | 12 |
| UPP | ER STA | GE EN | GINE | S or | single stay | ge engine | if used i | n a very his | ht ruck | E PUR | PLE EA | BES |
| 599 | A8-5 | \$3.45 | 0.56 | 2.50 | 5 sec. | 2.0 oz. | 48 oz. | 0.32 sec. | 0.62 | 17.6 | 0.110 | 3. |
| 604 | B4-6 | \$3.45 | 1.12 | 5.00 | 6 sec. | 1.5 oz. | 48 oz. | 1.20 sec. | 0.78 | 22.1 | 0.294 | 8. |
| 607 | B6-6 | \$3.45 | 1.12 | 5.00 | 6 sec. | 2.0 oz. | 48 oz. | 0.83 sec. | 0.78 | 22.1 | 0.220 | 6. |
| 615 | C6-7 | \$3.95 | 2.25 | 10.00 | 7 sec. | 2.5 oz. | 48 oz. | 1.70 sec. | 0.95 | | 0.440 | 12 |
| 300 | STER E | NGINI | es m | ED LAB | EL | | | | | | | |
| 608 | B6-0 | \$3.45 | 1.12 | 5.00 | none | 4.0 oz. | 48 oz. | 0.80 sec. | 0.58 | 16.4 | 0.220 | 6 |
| 616 | C6-0 | \$3.70 | 2.25 | 10.00 | none | 4.0 oz. | 48 oz. | 1.68 sec. | 0.80 | 22.7 | 0.440 | 12 |

Regular engines are 2.75 in, long and 0.690 in, dia. Ship Wt. of each package of engines is approximately 4 or "Series II engines have semi-core-burning grain with large propellant burning area for high initial thrust with short thrust duration.

| SINC | LE ST | AGE I | MI | | TY GREEN | | ENG | INES | H | | | |
|--------------|--|------------------|-----------------|-------|-------------------------|---------------------|----------------|--------------------|------|--------------|-------|-----------------------|
| Prod. No. | Engine Type | Prices 3 for | Total in ib-sec | N-sec | Time Delay (±15%) | Max. Lift Wt. | Max. Thrust | Thrust Duration | | tial ight | | ellant eight G. |
| 1666 1667 | D12-3 D12-5 | \$6.30 \$6.30 | 4.48 4.48 | 20.0 | 3 sec. 5 sec. | 14 oz. | 9 lb. 9 lb. | 1.70 sec. | 1.49 | 42.2 | 0.879 | 24.93 |
| UPP | ER STA | GE E | NGIN | ES | PURPLE | LABEL | | | FF. | | | |
| 1668 | D12-7 | \$6.30 | 4.48 | 20.0 | 7 sec. | 8 oz. | 9 lb. | 1.70 sec. | 1.55 | 44.0 | 0.879 | 24.93 |
| - | Annual Property of the Party of | ENGIN | ES : | ED LA | BEL. | | | | | | | |
| 1665 | D12-0 | \$6.30 | 4.48 | 20.0 | none | 14 oz. | 9 lb. | 1.70 sec. | 1.44 | 40.9 | 0.879 | 24.93 |

"D" engines are 2.75 in, long and 0.945 in, dia. Ship, Wt. of each package of "D" engines is approximately 619 oz.

| SIN | GLE ST | AGE I | ENGIN | | OREEN I | | INE | S | | | | |
|--------------|----------------|-----------------|--------------------|--------|-------------------------|---------------------|----------------|--------------------|-------|--------------------|-------|-----------------------|
| Prod. No. | Engine Type | Prices 4 for | Total In Ib-sec | N-sec | Time Delay (±15%) | Max. Lift Wt. | Max. Thrust | Thrust Duration | | tial ight G. | | ellant eight G. |
| 1503 | 1/2A3-2T | \$3.45 | 0.28 | 1.25 | 2 sec. | 2 oz. | 28 oz. | 0.36 sec. | 0.198 | 5.6 | 0.062 | 1.75 |
| 1507 | A3-4T | \$3.60 | 0.56 | 2.50 | 4 sec. | 2 oz. | 28 oz. | 0.86 sec. | 0.268 | 7.6 | 0.124 | 3.50 |
| 1511 | A10-3T | \$3.60 | 0.56 | 2.50 | 3 sec. | 5 oz. | 48 oz. | 0.26 sec. | 0.277 | 7.9 | 0.133 | 3.78 |
| | ER ST | | | | PURPLE | LABEL | | | | | | |
| 1504 | 1/2A3-4T | \$3.45 | 0.28 | 1.25 | 4 sec. | 1 oz. | 28 oz. | 0.36 sec. | 0.212 | 6.0 | 0.062 | 1.79 |
| BOO | STER I | ENGIN | ES I | RED LA | BEL. | | | The state of | | - | | 11.511.5 |
| 1510 | A10-0T | \$3.60 | 0.56 | 2.50 | none | 5 oz. | 48 oz. | 0.26 sec. | 0.235 | 6.7 | 0.133 | 3.70 |

Mini-Engines are 1.75 in. long and 500 in. dis. Ship. Wt. of each puckage of mini-engines is approximately 2.2 cm.
Complete instructions and igniters are included with each package.

of Estes model rocket engines.

Pound-seconds (Figures shown are optimum.)

Newton-seconds* (Figures shows are optimum.)

*A Neuton is the measurement of force required to move one killingram of mass one meter per second. Any thrust in Neutons's thrust fluration - Neuton-secands. Neuton-seconds - by 4.45 - Payand seconds.

ASTRON™ LAUNCH CONTROLLER

Recommended for 6 or 12 volt batteries. No need to remove battery from car, simply connect battery clips to terminals. Features include continuity light, safety key, launch button, battery clips, microclips, and 18 ft. of launch cable. Ship Wt. 12 oz. No. 2212 \$12.89

ELECTRON BEAM™ LAUNCH CONTROLLER

Completely assembled the Electron Beam™ features safety key, continuity light, launch button and snap-open battery compartment, plus 17 feet of launch wire with micro-clips. It is easy to hold in your hand and carry in your launch box. Requires only 4 AA alkaline batteries-Not Included. Use only with Estes Igniters (#2301). Length: 6.75" Width: 1.5" Depth: 1.25" No. 2220 \$15.79

Ship. Wt. 8 oz. PORTA-PAD® II LAUNCH PAD

Sturdy launch pad may be used with any Estes launch controller to launch any Estes rocket. You'll love the easy set-up for launching and quick take-down for carrying and storage. Bright, easy-to-see pad features stable design. Adjustment for air direction cannot be tilted more than 30° from vertical. Easy to adjust, no tools required. Other features include a steel blast deflector plate and a 36 inch by 1/8 inch diameter two-piece launch rod. Pad also accommodates the Estes Maxi™ rod (#2244) to launch your really large Estes models-Not Included. Bright yellow launch rod safety cap provides good visibility and protection. The standoff holds most Estes rockets above the blast plate allowing reliable igniter connections. A Safety Key for your Estes controller is also included. Use the enclosed cord to attach it to the Safety Cap. You'll always know just where it is! Ship Wt. 24 oz. No. 2215 \$12.89

3/16"DIA. MAXI™ROD Ship Wt. 12 oz. No.2244 \$4.69

1/8" DIA. TWO PIECE LAUNCH ROD Ship Wt. 6 oz. No. 2243 \$3.59

LAUNCH ROD SAFETY CAP with UNIVERSAL SAFETY KEY Ship Wt. 4 oz. No. 2205 \$1.10





The Electron Beam™ Launch Controller (#2220) or the Astron" Launch Controller (#2212) are the recommended launch controllers for use with the Porta-Pad® II (#2215).

PORTA-PAD® II

MICRO-CLIPS (2 per pkg) Ship Wt. 1 oz. No. 2247 \$1.39

BLAST DEFLECTOR PLATE Ship Wt. 5 oz. No. 2241 \$2.49

BATTERY CLIPS (2 per pkg) Ship Wt. 5 oz. No. 2245 \$2.05

DESIGNER'S SPECIAL

Ideal parts assortment for the creative rocketeer. Develop your own R & D program. Over 75 pieces at an excellent savings! Ship Wt. 2 lbs.

Body Tubes 2 BT-5

2 BT-20 2 BT-50 1 BT-55

1 BT-60 None Cones

I BNC-55 I BNC-20B 1 BNC-20R 1 PNC-50KA

1 PNC-50YR I PNC-55AC 1 PNC-60MS

Fin Material 2 BFS-20 2 BFS-30 2 BFS-40

Parachutes. 1 PK-10

2 PK-12 1 PK-18 1 PK-24

No. 1463

Recovery Equipment

3 Shock Cord 1/8" = 18" Shock Cord US x 36" I Shock Cord 1/4" x 36"

Streamer Material I' x 30" 6 Screw Eyes

Miscellaneous

3 Engine Blocks (EB-20A) 3 Engine Holders (EH-3)

3 Engine Holders (EH-2) 1 Engine Mount (EH-2050)

1 Engine Mount (EH-2060) 1 None Block (NB-20) 1 Nose Block (NB-50)

1 Stage Coupler of T-55C 1 Stage Coupler (JT-600) 1 Balan Adapter (TA-2050A)

1 Multi-Purpose Paper Adapter Set (TA-1)

12 Launch Laigs (2-3/8" lang 1 Alpha Book of Model Rocketry

1 Fin Pattern Sheet No. 2 1 Fin Pattern Sheet No. 3

\$30.99



EMERGENCY REPAIR KIT



essential materials for "on-the-spot" repair of your model rockets. Ship Wt. 8 oz. White Glue

No. 2233

Reclimenble Fouch Recovery Wadding 1/8" and 1/4" Shock Covin

A must for every range box. Features many

Position and glue fins quickly and easily. Fits body tubes up to BT-101. Designed for either 3 or 4 finned rockets, aligning fins at 90° or 120° to each other. Easily assembled with slip-together plastic parts. Adjusts quickly with plastic fin position clips. Ship. Wt. 3 lbs. No. 2231

altitude on metric scale-no guessing! (Conversion table included for feet.) A precision instrument made of durable plastic. Easy-toassemble and looks like futuristic laser pistol. How high did it go? Now you'll know! Ship. Wt. 15 oz.

Track your rocket to the top of its flight and


altitude finder. Displays exact model rocket

No. 2232

\$13.99

\$12.99

58

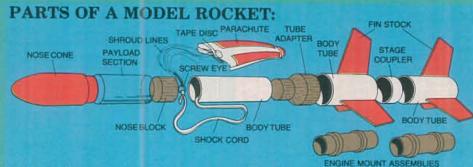

Model rocket kits are constructed of light-weight materials such as balsa wood, paper tubes, and plastic as shown in this diagram. Nearly all matching Estes parts have the same series description number and are interchangeable. For instance a body tube BT-20 will mate with a balsa nose cone BNC-20B. A balsa adapter TA-2060 will adapt a BT-20 to a BT-60. An AR-2050 will center a BT-20 in a BT-50. When ordering parts use both the product number and the description.

BODY TUBES Spiral wound paper

| Prod. | Description | Price Each | Length | Inside Diameter | Outside Diameter | Wall Thickness | Weight Net. | in Oz. Ship. |
|-------|-------------|---------------|--------|--------------------|---------------------|-------------------|----------------|-----------------|
| 30302 | BT-5 | \$1.80 | 18" | 0.515" | 0.541 | 0.013" | 219 | 11 |
| 30316 | BT-20 | \$2.05 | 18" | 0.710" | 0.736 | 0.013 | 288 | 31 |
| 30352 | BT-50 | \$2.05 | 18" | 0.950* | 0.976" | 0.013* | .378 | 11 |
| 30382 | BT-55 | \$2.35 | 18" | 1.283* | 1.325" | 0.021" | 672 | - 11 |
| 30396 | BT-60 | \$2.55 | 18" | 1.595" | 1.637" | 0.021 | 960 | - 11 |
| 30424 | BT-70 | \$3,15 | 17:5" | 2.175" | 2.217 | 0.0211 | 1.300 | 14 |
| 30433 | BT-80KD | \$2.90 | 14.2 | 2.560* | 2.600* | 0.021* | 637 | 11 |
| 30449 | BT-101SV | \$5.25 | 24.7" | 3.896* | 3.938" | 0.021* | 2.673 | 16 |

NOSE CONES

Nose cone dimensions listed in columns 1, 2, and 3.



| Shape | No. | Prod. | Description | Dela | | | 7.00 P | A STATE OF THE PARTY OF THE PAR | Tour |
|---------|--------------|---------|--------------------------|---------------|----------|---------|----------|--|-------|
| онаре | IVO. | No. | Description BNC-Balsa | Price Each | 1 | mension | 23/4 | Average | Ship. |
| | | NO. | PNC-Plastic | Each | - 1 | 2 | 3 | Weight | Wt. |
| 4 | 1 | 70216 | BNC-5V | \$1.80 | 3/4" | 0.541" | 1/4" | 0.013 oz. | 1 02 |
| 2 3 1 | 2 | 70212 | BNC-5E | \$1.80 | 1-3/8" | 0.541* | 1/4" | 0.020 oz | 1 02 |
| 0011 | 3 | 70214 | BNC-5S | \$1.80 | 1-1/2" | 0.541* | 1/4" | 0.016 oz. | 1.02 |
| 8888 | 4 | 70218 | BNC-5W | \$2.05 | 2-7/8" | 0.541" | 1/4" | 0.039 oz. | 202 |
| 7 | 5 | 70230 | DNG OOD | 04.05 | | 0.7000 | P. IA PR | 0.00 | Parse |
| 5 6/ / | 6 | 70240 | BNC-20B | \$1.95 | 1-11/16" | 0.736" | 5/16" | 0.05 oz. | 1 02 |
| 0/1/18 | 7 | 70226 | BNC-20R | \$2.05 | 2-3/4" | 0.736" | 3/8" | 0.07 oz. | 2 oz. |
| WALLA | 8 | 70241 | BNC-20AM | \$2.00 | 2-1/2" | 0.736" | 1/2" | 0.06 oz. | 202 |
| 4444 | | / Maren | BNC-20Y | \$1.90 | 47 | 0.736" | 3/8" | 0.02 oz | 1 oz. |
| / 12 | 9 | 70256 | BNC-50J | \$2.05 | 1-3/8" | 0.976" | 1/2" | 0.00 | |
| 11/ | 10 | 70262 | BNC-50K | \$2.25 | 2-3/4" | 0.976 | 1/2" | 0.08 oz. | 4 oz. |
| 9 10 | 10 | 71028 | PNC-50KA | \$1.95 | 2-3/4" | 0.976* | 1/2" | 0.13 oz. | 4 oz. |
| | 11 | 71001 | PNC-50SP | \$2,70 | 5-11/16" | 0.976 | 1/2" | 0.13 oz. | 4 oz. |
| | 12 | 70266 | BNC-50Y | \$2.70 | 4-3/8" | 0.976" | | 0.25 oz. | 6 oz. |
| 9999 | 100 | rozud | DIVO-301 | \$2.70 | 41-0/0 | u.s/0 | 3/8" | 0.16 oz. | 6 oz. |
| 13 14 7 | 13 | 71070 | PNC-55AC | \$3.15 | 5-3/8" | 1.0055 | 0.00 | 0.22.02 | |
| | RESIDENCE OF | 71038 | | | 3-3/4" | 1.325" | 3/8" | 0.32 oz. | 6 02 |
| | 1.4 | 71030 | PNC-55D | \$3.15 | 3:3/4 | 1.325" | 3/4" | 0,36 oz. | 4 oz. |
| 16 | 15 | 71020 | PNC-60MS | \$2.75 | 3-1/8" | 1.637" | 5/8" | 0.39 oz. | |
| | 16 | 71043 | PNC-60AH | \$3.95 | 6-5/8" | 1.637" | 7/8" | | 4 oz. |
| A A | 10 | 112-5 | T ALGEBRANT | 40.00 | 0-0/0 | 1,037 | 770 | 1.0 oz. | 6 oz. |
| 17 | 17 | 70300 | BNC-70AJ | \$4.40 | 4-1/4" | 2.217" | 4. | 0.85 oz | 6 oz |
| 18 /19 | | | | | | | | Section 1 | |
| | 18 | 71035 | PNC-80K | \$4.10 | 8-1/8" | 2.555" | 1-5/8" | 1.68 oz | 8 oz. |
| | 19 | 72080 | PNC-80BB | \$4.10 | 4" | 2.600" | 2-1/8" | 1.18 gz. | 8 oz |
| RO | | | | | | | | | |

FIN STOCK

Top quality balsa sheeting for making fins for model rockets. For maximum strength, grain of wood should follow the leading edge of fin.

| Prod. No. | Description | Price 3 for | Dimensions (Ininches) | Weight in Oz. Net. Ship. | Major Use |
|-----------|-------------|----------------|--------------------------|-----------------------------|------------------|
| 32102 | BFS-20 | \$1.90 | 1/16x3x9 | 130 4 | High Performance |
| 32106 | BFS-20L | \$2.15 | 1/16x3x12 | 173 6 | High Performance |
| 32108 | BFS-30 | \$1.95 | 3/32x3x9 | 150 4 | Sport Models |
| 32116 | BFS-301. | \$2.20 | 3/32x3x12 | 200 6 | Sport Models |
| 32116 | BFS-40 | \$2.00 | 1/8x3x9 | 200 4 | Cluster Rockets |
| 32118 | BFS-40L | \$2.20 | 1/8x3x12 | 265 6 | Glider Wings |

ENGINE MOUNTS

Use Estes high performance engine mounts for your original designs. All engine mounts feature easy-to-assemble instructions and light weight components. Avg. Ship. Wt. 5 oz.

| Engine Type | Prod. No. | Description | Price | Fits | Net Weight Oz. |
|--|----------------------|-------------------------------|----------------------------|-------------------------|----------------------|
| For Regular Engines—A, B, & Ctype 0.69*x2.75* | 3150 3151 3152 | EH-2050 EH-2055 EH-2060 | \$2.00 \$2.00 \$2.00 | BT-50 BT-55 BT-60 | 0.1 0.14 0.17 |
| For "T" Mini- Engines ,5" x 1.75" | 3153 | EM-520 | \$1.95 | BT-20 | 0.09 |
| Special Purpose Quick-Change Conversion Mount—From "D" Engines to Reg- ular Engines | 3154 | EM-2050 | \$2.05 | BT-50 | 0.19 |
| For "D" type Engines 0.945" x 2.75" | 3156 | EM -5055/60 | \$2.65 | BT-55 or BT-60 | 0.3 |

ENGINE BLOCKS

| Prod. No. | Description | Price 3 for | Outside Dia. | Inside Dia. | Length | Fits | Weight Net. | in Oz. Ship. |
|--------------|-------------|----------------|-----------------|----------------|--------|-------|----------------|-----------------|
| 3131 | EB-20A | \$1.65 | .708* | 1657 | 1/4" | BT-20 | .009 | 1 |

BALSA ADAPTERS

Switch from one size body tube to another for payload capsules, parachute compartments, etc. Can be hollowed to make a passage for ejection gases. All adapters have at least 1/2" mating surface on each end.

| No. | Description | Each | Mates Tubes | Length | Length | Weight Net. | Ship. |
|-------|-------------|--------|----------------|--------|--------|----------------|-------|
| 70002 | TA-520 | \$1.95 | BT-5 to BT-20 | 1.75* | 0.75 | 0.04 | 1 |
| 70004 | TA-550 | \$2.05 | BT-5 to BT-50 | 2.2 | 1.01 | 0.06 | 4 |
| 70006 | TA-2050 | \$1.80 | BT-20 to BT-50 | 3.0" | 2.0" | 0.15 | 4 |
| 70010 | TA-2055 | \$2.20 | BT-20 to BT-55 | 2.5" | 1.5" | 0.22 | 4 |
| 70012 | TA-2060 | \$3.15 | BT-20 to BT-60 | 3.0° | 2.0" | | 4 |
| 70014 | TA-5055 | \$3.15 | BT-50 to BT-55 | 2.0 | 1.01 | 0.60 | 4 |
| 70016 | TA-5060 | \$3.75 | BT-50 to BT-60 | 3.0 | 2.0" | 0.23 | 4 |
| 70028 | TA-5560 | \$3.85 | BT-55 to BT-60 | 2.2 | 1.0* | 0.25 | 4 |
| 70034 | TA-6070 | \$3.55 | BT-60 to BT-70 | 2.7" | 1.5" | 0.65 | 4 |

STAGE COUPLERS

For multi-staging, joining body tubes, positioning adapter tubes, etc. Make perfect guides for cutting body tubes and sanding cut edges of body tubes, too. Ship Wt. for all is 3 oz. each.

| Prod. No. | Description | Price Each | Outside Diameter | Inside Diameter | Length | Fits | Average Weight |
|--------------|-------------|---------------|---------------------|--------------------|-------------------|--------|-------------------|
| 30252 | JT-5C | \$1,20 | 0.513 | 0.455 | 3/4" | BT-5 | .020 oz |
| 30254 | JT-20C | \$1.20 | 0.708 | 0.650" | 3/4" | BT-20 | 027 oz |
| 30260 | JT-50C | \$1.20 | 0.949 | 0.920" | The second second | BT-50 | .051 oz |
| 30262 | JT-55C | \$1.20 | 1.28" | 1.25 | 1.3 | BT-55 | .088 oz. |
| 30266 | JT-60C | \$1.20 | 1.59" | 1.55 | 1-1/2 | BT-60 | 124 oz. |
| 30270 | JT-70A | \$1.80 | 2.175 | 2 115 | 1-1-4 | BT-70 | 140 oz |
| 30274 | JT-80C | \$1.80 | 2.552* | 2.502" | 12 | BT-80 | 102 oz |
| 30280 | JT-1015V | \$1.80 | 3.888* | 3.846* | 1-3/81 | BT-101 | 184 oz |

NOSE BLOCKS

Use balsa nose blocks in payload sections and anywhere else a solid bulkhead is required.

| Prod. No. | Description | Price Each | Outside Diameter | Length | Fits | Weigh Net | tin Oz. Ship. |
|----------------|----------------|------------------|---------------------|--------|----------------|--------------|------------------|
| 70152 70158 | NB-20 NB-50 | \$1.40 \$1.65 | 0.710 | 3/4 | BT-20 BT-50 | | |



PARACHUTE KITS with 'chute material, tape discs,

ery! Two-color printed plastic less than .3 oz. Ship Wt. 2 oz. chutes give maximum visibility with easy track design. Lightweight, durable and easily folded. These 'chutes are very thin, allowing the most material to be packed into the least body space. Each kit comes complete

Get the best in parachute recov- and shroud lines. Each weighs

| Prod. | Description | Parachute | Price |
|-------|-------------|-----------|--------|
| No. | | Diameter | Each |
| 2262 | PK-10 | 10 inches | \$1.99 |
| 2264 | PK-12 | 12 inches | \$1.99 |
| 2267 | PK-18 | 18 inches | \$2.49 |
| 2271 | PK-24 | 24 inches | \$2.49 |

TAPE DISCS: Fasten shroud lines to plastic parachutes or streamers with these 3/4" dia. pressure sensitive Tape Discs. In sheets of 6 discs. (4 sheets per pkg.) Ship Wt. 1 oz. \$1.80 No. 2294

STREAMER MATERIAL: Bright orange, flame-resistant crepe paper streamers. In 71/2 foot lengths, enough for two to eight streamers. Specify size when ordering. Ship. Wt. 1 oz. 1" wide: Net Wt. 0.092 oz.

No. 2341 \$3.10 2" wide: Net Wt. 0.184 oz. \$3.35 No. 2343

SCREW EYES: Specify size when ordering. (6 per pkg.) Ship Wt. 1 oz.

LARGE EYE: 1" long: 0.04 oz. No. 2280 \$1.70 SMALL EYE: 3/4" long: 0.03 oz. \$1.60 No. 2279 EXTRA SMALL EYE: 5/8" long: 0.01 oz. \$1.35 No. 2281

AR-5055 CENTERING RINGS: For centering a BT-50 body tube within a BT-55. Extra strong for "D" engine mounts. Weight 0.062 oz. ea. (4 per pkg.) Ship Wt. 2 oz. No. 3102 \$1.95

AR-2050 CENTERING RINGS: For centering a BT-20 body tube within a BT-50. Greater strength makes for use with high thrust engines. Weight per pair 0.285 oz. (10 per pkg.) Ship Wt. 2 oz. No. 3100

LAUNCH LUGS: Super-strength laminated launch lugs feature mylar plastic core for durability, paper outer layer for easy gluing. Inside diameter 5/32" fit 1/8" launch rod. Ship Wt. 1 oz.

11/4" long (12 per pkg.) 23/8" long (10 per pkg.) No. 2321 \$2.00 No. 2322 \$2.20

MULTI-PURPOSE SET: Includes a total of 20 rings for positioning BT-5 in BT-20; BT-5. BT-20, BT-30 in BT-50; and BT-5, BT-20 and BT-50 in BT-60. Also three universal tapered shrouds and instructions. Ship Wt. 2 oz. No. 85013 \$2.05

62

SHOCK CORD: Specify width when ordering. Ship. Wt. 1 oz. 1/8" wide: Net Wt. 0.039 oz. \$1.05 1/4" wide: Net Wt. 0.078 oz. No. 2277 \$1.15

Also 36" long for greater stretch on those larger birds. 1/8" wide: Net Wt. 0.078 oz. No. 85744

SHROUD LINES: Build reliable, durable, custom parachutes with this strong, hard surface shroud line cord. Comes in 70 yard spools. Ship. Wt. 5 oz. No. 2340 \$1.80

TAPE STRIPS: For top strength, low bulk and low weight, fasten shroud lines with these 1/4" x 3/4" tape strips, in sheets of 12 strips. (6 sheets per pkg.) Ship. Wt. 1 oz.

No. 38412 \$2.05

SNAP SWIVELS: For quick changes and reduced tangling in your recovery systems, use these tiny 1" long snap swivels. Net Wt. 0.01 oz. (12 per pkg.) Ship Wt. 1 oz. \$2.30 No. 2292

ENGINE HOLDER: Flat spring steel design gives easy installation and low drag. Recommended for sport and demonstration models. (3 per pkg.) Ship Wt. 1. 0z.

For Regular and "D" engines.

No. 3140 \$2,30 For Mini-Engines No. 3142

RA-2050 RINGS: 20 rings for centering and mounting BT-20 in BT-50. (20 per pkg.) Ship Wt. 2 oz.

No. 3110

RA-2055 RINGS: 10 rings for centering and mounting BT-20 in BT-55. (10 per pkg.) Ship Wt 2. oz. No. 3111 \$1.85

RA-2060 RINGS: 10 rings for centering and mounting BT-20 in BT-60. (10 per pkg.) Ship Wt. 2 oz.

No. 3113 \$1.95 MAXI™ ROD LAUNCH LUG: 2" long, fits 3/16" diameter launch rod. (4 per pkg.) No. 2328 \$1.80

DOWELS: Extra-strong lightweight seasoned maple dowels. (8 per pkg.) Ship Wt. 5 oz. 1/8" x 18" 1/12" x 12" No. 3190 \$1.65 No. 3191 \$1.65



COMPUTER SOFTWARE

PHYSICS OF MODEL ROCKETRY

Action-Reaction Acceleration and Inertia Energy Momentum Staging

Satellites Tech Tip" on G Forces

No. 9027 \$24.95

FLIGHT:

AERODYNAMICS OF MODEL ROCKETS

Forces on Flying Objects Aerodynamics

Stability Drag

Center of Gravity/ Center of Pressure No. 9026 \$44.95

IN SEARCH OF SPACE: INTRODUCTION TO MODEL ROCKETRY

Model Rocket Flight Profile Parts of a Model Rocket Model Rocket Engines and Classification

Model Rocketry Safety Code and Reviews (+ Bonus Programs on Multi-Staging and on Igniters and Installation) No. 9025 \$24.95

ASTROCAD: PERFORMANCE ANALYSIS FOR MODEL ROCKETRY

Written by Michael Gasperi

Apogee Determination Drag Prediction Performance Prediction Flight Simulation Aerodynamic Stability

No. 9028 \$19.95

AEROTREK MODEL ROCKET ALTITUDE PREDICTION TOOLKIT

Introduction Single Stage Two Stage Three Stage

Single Stage Cluster Incremented Weight Designer's Scratchpad Lunar Launch

No. 9033 \$19.95

90 DAY WARRANTY

Programs written by Bob Cannon and Mike Dorffler. ©Copyright Estes Industries. 1986, 1987, 1988. All Rights Reserved. Graphics created with BLAZING PADDLES by Baudville. Animation created with TAKE 1 by Baudville. Apple is a registered trademark of Apple Computer, Inc.

Software products are on 51/2 inch disks for use with Apple II series computers. A minimum of 64K of memory is required. A color monitor is recommended.

Phantom"

Static see-through rocket with 10" recovery parachute, engine mount, and cut-away C6-5 model rocket engine. Ideal for demonstrations, science fairs and exhibits. Length: 12.6" Dia.: 0.976" Wt.: 1.35 oz. Ship, Wt. 3 oz.

No. 1207

\$5.79

Model Rocket Design

Elliptical Fin Design

(two versions)

Drag Estimation

Optimum Weight



PUBLICATIONS

THE ROCKET BOOK No. 2859 \$16.30 THE LAWS OF MOTION AND MODEL ROCKETRY No. 2821 \$.70 INDUSTRIAL ARTS TEACHERS MANUAL FOR MODEL ROCKETRY No. 2810 \$1.45 GUIDE FOR AEROSPACE CLUBS

No. 2817 \$1.10 MODEL ROCKET CONTEST GUIDE No. 2815 \$1.10

PROJECTS IN MODEL ROCKETRY No. 2831 8.90

CAMP LEADER'S MODEL ROCKETRY MANUAL No. 2822 \$1.45

SECOND STAGE: ADVANCED MODEL ROCKETRY No. 2861 \$9.85

MODEL ROCKETRY-THE SPACE AGE TEACHING AID No. 2840 \$1.15 ALPHA BOOK OF MODEL

ROCKETRY No. 2820 \$1.10 MODEL ROCKET LAUNCH SYSTEMS

No. 2811 \$.85 MODEL ROCKETRY STUDY GUIDE No. 2841 \$1.45


THE CLASSIC COLLECTION No. 2845 \$3.50 ALTITUDE PREDICTION CHARTS No. 2842 \$2.00

AERODYNAMIC DRAG OF MODEL ROCKETS No. 2843 \$2.00 ELEMENTARY

MATHEMATICS OF MODEL ROCKET FLIGHT No. 2844 \$.85

MODEL ROCKETRY TECHNICAL MANUAL No. 2819 \$.75

HANDBOOK OF MODEL ROCKETRY (Revised Fifth Edition) No. 2860 \$11.95

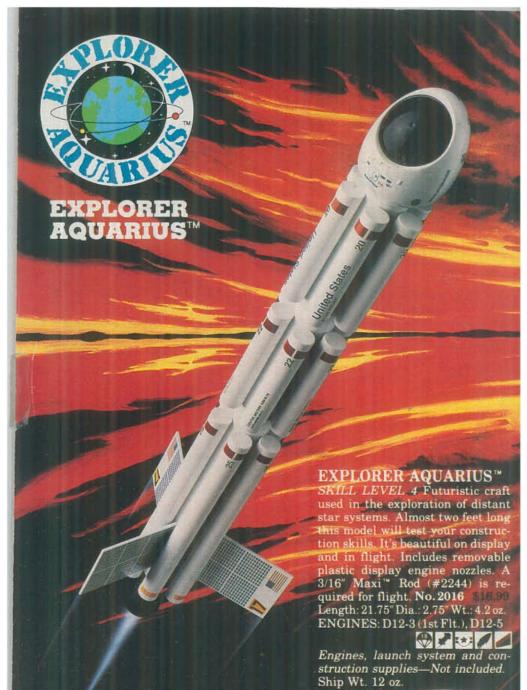

A DAMON COMPANY

ESTES INDUSTRIES

P.O. BOX 227, 1295 H STREET, PENROSE, CO 81240 USA

PN 2887 891P