



World Leader in Model Rocketry

www.estesrockets.com

TABLE OF CONTENTS

How To Start	3	Launch Sets	32
What to Know	4	Ready To Fly Rockets	38
Model Rocket Safety Code	5	E2X® (Easy To Assemble)	48
New	6-25	Skill Level 1	48
Launch Sets	6	Skill Level 2	62
Air Rocket	6	Skill Level 3	72
RTF	8	Skill Level 4-5	74
ARF	12	How Model Rocket Engines Work	76
E2X	16	Model Rocket Engine Chart	77
Skill Level 1-2	20	Engine Time/Thrust Curves	78
Skill Level 2-5	22	Designer's Special	79
Helicopters	24	Model Rocket Accessories	80
Gliders	26	Estes Educator™	84
Pro Series II	28	Model Rocket and Engine Bulk Packs	86

220 Swift™	48	Flutter-By™	54	Quark™	48
3 Bandits™	18	Flying Colors™	14	Rascal™	38
AGM-57X Heatseeker™	16	Freefall™	44	Rascal™ & HiJinks™ Launch Set	32
Air Commander™	68	Fuse™	38	Red Flare™	16
Alien Green™	8	Fusion X25™	58	Red Rider™	12
Alien Invader™	66	Generic E2X® Bulk Pack	86	Reflector™	52
Alpha®	48	Gnome™	42	Renegade-D™	72
Alpha® Bulk Pack	87	Gnome™ Bulk Pack	86	Ricochet™	58
Alpha III®	42	Gold Strike™	46	Riptide™ Launch Set	32
Alpha III® Bulk Pack	86	Guardian™	64	Rocket Red™	8
Alpha III® Launch Set	32	HeliCat™ Launch Set	34	Rocket-Star™ Air Rocket Launch Set	6
Altimeter	88	Helios™	14	Rogue Voyager™	22
Argent™	28	Hi-Flier®	52	Satellite Interceptor™	50
Asteroid Hunter™	74	Hi-Flier XL™	68	Scrappy™	10
Astron Elliptic II™	64	HiJinks™	38	Screaming Eagle®	62
Astron Skydart II™	72	Hornet	56	Shooting Star™	12
Astron Sprint XL™	22	Hunter's Choice Launch Set	6	Shuttle Xpress™	46
Athena™	38	Hyper Bat™	70	Shuttle Xpress™ Launch Set	34
Atomic Sky™ Launch Set	6	JBR-013™	20	Silver Arrow Launch Set	32
AVG™ Bulk Pack	86	Laser Lance™	68	Silver Streak™	46
Baby Bertha™	48	Leviathan™	28	Sizzler™	10
Bandito™	42	L.G.M. 0095™	14	Sky Duster™	40
Banshee™	16	LoadStar™	40	Sky Hawk™	38
Big Bertha™	50	LoadStar II™	87	Sky Shark™	18
Big Daddy™	64	LoadStar II™ Bulk Pack	70	SkyTrax™	40
Black Diamond™	18	Long Tom™	66	Sky Twister™	44
Black Star Voyager™	22	Longneck Express™	10	Sky Twister™ Launch Set	34
Blast-off Blue™	8	Magician™	72	Slinger™	10
Blenders™	20	Manta II™ Launch Set	10	Solar Flare™	64
Blue Ninja™	44	Maxi Alpha™ 3	62	Solar Scouts™ Launch Set	34
Booster-55	14	Maxi Alpha™ 3 Launch Set	36	Solar Warrior™	68
Booster-60	14	Mean Machine™	62	Solaris™	12
Bull Pup 12D	70	Mega Mosquito™	62	Space Eagle™	58
CC Express™	62	Mega Der Red Max™	30	Star Stryker™	58
Centuri™	20	Metalizer™	46	Star Trooper™	56
Chuter-Two™	54	Mini Comanche-3™	66	STM-012™	20
Code Red™	40	Mini Fat Boy™	20	Stratocruiser™	60
Comet Chaser™	56	Mini Honest John	54	Summit™	40
Comet Chaser™ Bulk Pack	87	Mini Max™	54	Super Alpha™	60
Cosmic Explorer™	52	MIRV™	72	Super Neon XL™	72
Cosmic Interceptor™	22	Mix-it UP™	18	T-Bolt™ Air Rocket Launch Set	36
Crossfire ISX™	60	Monarch™	60	Tandem-X™ Launch Set	34
Curvilinear™	20	Mongoose™	52	Taser™ Launch Set	36
Customizer™ Mini Launch Set	36	Moon Mutt™ Launch Set	36	Taser Twin™	56
D-Region Tomahawk	62	Mosquito™	50	Terrel™ Boost Glider	72
Dark Energy™	70	Nike Smoke™	30	Top Shot™	16
Der Red Max™	48	Nitro™	40	Twister™	56
Designer Special™	79	No. 2 Estes Sky Writer®	42	U.S. Army Patriot M-104	52
Dink™	16	Nova Payloader™	50	UP Aerospace™ Spaceloft™ Bulk Pack	86
Dragonite™	46	Outer-space Orange™	8	V2 Semi-scale Model	72
Eggs-caliber™	64	Outlaw™	10	Vagabond™	68
Emerald Streak™	18	Partizon™	28	Vector Force™	58
EPM-010™	70	Patriarch™	38	Ventris™	58
Estes Jetliner™	20	Payloader II™	54	Viking™	50
EX-200™	38	Phantom Blue™	12	Viking™ Bulk Pack	87
Eliminator™	44	Phoenix Bird™	54	Wizard™	48
Eliminator XL™ Launch Set	32	Photon Disruptor™	66	Wizard™ Bulk Pack	87
Extreme 12™	22	Photon Probe™	66	Xarconian Cruiser™	74
Fat Jax™	40	Planet Purple™	8	Yankee™	50
Firehawk™	42	Plasma Probe™	60	Yellow Star™	8
Firestreak™ SST	42	Power Patrol™	12	Zinger™	46
Firestreak SST™ Bulk Pack	86	Prospector™	40		
Firestorm™	14	Pulsar Pink™	8		
Flash®! Launch Set	36	Puma™	38		
Fletcher™	52	QCC Explorer™	74		

Prices and availability are subject to change without notice. Color of product may vary.

© 2012 Estes-Cox Corp., 1295 H Street, PO Box 227, Penrose, CO 81240-0227.

A subsidiary of Hobbico, Inc. All rights reserved. Printed in Denver, CO, USA. PN2927-13 (12-12)



HOW DO I START MY OWN ESTES ROCKET FLEET?

The best way to begin model rocketry is with an Estes flying model rocket launch set. Most of our launch sets are from the E2X® (Easy To Assemble) line. The rocket itself requires minor assembly. All launch sets come with an electrical launch controller, adjustable launch pad and instructions to get you out and flying in no time. You will need to purchase flight supplies (engines, recovery wadding, igniters and igniter plugs) and new alkaline batteries (for the controller) – sold separately.

HOW EASY AND HOW MUCH TIME DOES IT TAKE TO BUILD MY ROCKETS?

Estes model rocket kits range from ready to fly in just minutes to those that provide many enjoyable hours of building fun. Estes kits are classified into seven categories.

READY TO FLY (RTF): No paint, glue or modeling skills required. Rocket comes assembled and is ready to launch in minutes.

ALMOST READY TO FLY: Very minor assembly required and is ready to launch in just a few minutes.

E2X® (EASY TO ASSEMBLE): No paint or special tools needed. E2X® kits contain parts that are colored, easy to assemble, plastic fins or fin units and plastic nose cones. Glue the parts together as instructed, apply the self-stick decals and attach the recovery system.

Skill Level 1: Requires some painting, gluing and sanding. Features laser cut wood fins, plastic or balsa nose cones, self-stick or waterslide decals, unfinished body tubes and step-by-step instructions. Most kits are single stage rockets.

Skill Level 2: First tier of more advanced kits that require beginner skills in model rocket construction, finishing and painting. Features laser cut wood fins, plastic or balsa nose cones, self-stick or waterslide decals, unfinished body tubes and step-by-step instructions. These are unique designs that include multi-stages, payloads and scale models.

Skill Level 3: Second tier of more advanced kits that require moderate skills in model rocket construction, finishing and painting. Features multiple laser cut wood fins and parts, unfinished body tubes, waterslide decals, balsa or plastic nose cones, vacuum-formed plastic detailing and step-by-step instructions. These complex designs include scale models, payloads and multi-stagers that can use D and E engines.

Skill Level 4: Requires a high degree of construction and finishing skills. Features multiple laser cut wood fins, unfinished body tubes and waterslide decals. Assembly can take several days depending on the details required.

Skill Level 5: The most advanced and challenging kit level. These kits are designed for very experienced, master modelers. Construction is extremely complex using advanced wood, paper and plastic techniques. Finishing is detail-oriented that may involve elaborate paint schemes. Building and finishing these rockets can take up to a week or more.


WHAT IS AN ESTES MODEL ROCKET?

Estes model rockets are activity kits designed of lightweight materials such as paper tubing, balsa wood and plastic. Fins attached to the body tube help provide guidance and stability. An engine mount assembly holds the engine in place during rocket flight in most models.

HOW DOES IT WORK?

The Estes model rocket is propelled into the air by an electrically ignited model rocket engine. After its acceleration, the rocket continues upward emitting tracking smoke as it coasts. At the rocket's peak altitude (also called apogee), a recovery device, such as a parachute or streamer, is deployed to return the rocket gently to earth. The rocket can then be prepared for another flight.

FLIGHT SEQUENCE

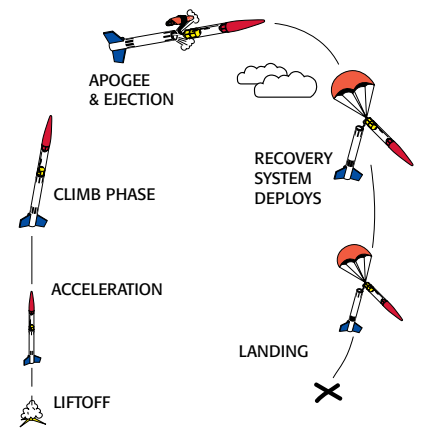

WHERE DO I FLY ESTES MODEL ROCKETS?

The chart on page 5 tells you what size field to use for each size engine. Each engine size is designated by a letter and is up to twice as powerful as the letter before it. See the engine section (pages 76-78) of this catalog for more information.

HOW DID IT ALL GET STARTED?


In the mid-1950s when the space age began, flying rockets became very popular. However, there were no propellants readily available to launch model rockets. In 1958 Vernon Estes developed the first, mass-produced model rocket engine. The Estes rocket engine was destined to make model rocketry one of the most popular outdoor activities enjoyed today. Estes products have changed with the times and you can see all of the exciting rockets in this catalog or on the web at www.estesrockets.com.

WHAT DO I NEED TO KNOW?

In this catalog, each description lists important INFORMATION:

- Specifications – length, diameter and estimated weight.
- What engines we recommend.
- How high, on the largest engine recommended, the rocket flies (feet and meters).
- Projected altitudes are estimates only and your rocket's actual performance may vary.
- The type of recovery system that brings the rocket back – parachute, streamer or other.

PARTS OF A MODEL ROCKET

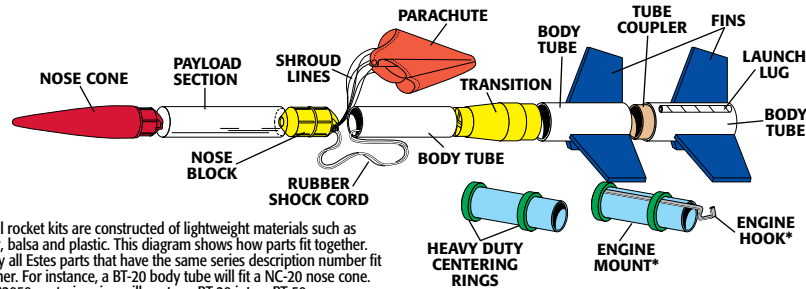

Model rocket kits are constructed of lightweight materials such as paper, balsa and plastic. This diagram shows how parts fit together. Nearly all Estes parts that have the same series description number fit together. For instance, a BT-20 body tube will fit a NC-20 nose cone. An AR2050 centering ring will center a BT-20 into a BT-50.

* Not included in RTF or E2X® kits.

PLEASE READ—IMPORTANT STUFF!

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age. Unless otherwise specified, all models require assembly. Engines, recovery wadding, igniters and igniter plugs, launch system, glue and finishing supplies are not included with model rocket kits.

USE ONLY WITH ESTES PRODUCTS

Caution: Use of any Estes product with any other brand-name rocket product containing any defect or causing any damage may void the Estes warranty.



FULL ONE-YEAR WARRANTY

Your Estes model rocket product is warranted against defects in materials or workmanship for one year from the date of the original purchase. If this Estes product, because of a manufacturing mistake, malfunctions or proves to be defective within the one-year warranty period, it will be repaired or replaced, at Estes' option and at no charge to you.

This warranty does not cover incidental or consequential damage to persons or property caused by the use, abuse, misuse, failure to comply with operating instructions or improper storage of the warranted products. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

For repair or replacement under this warranty, please contact us at www.estesrockets.com or by mail at Estes-Cox Corp., Customer Service Department, 1295 H Street, PO Box 227, Penrose, Colorado 81240-0227.

National Association of Rocketry MODEL ROCKET SAFETY CODE (Basic Version, Eff. August 2012)



- 1. Materials.** I will use only lightweight, non-metal parts for the nose, body, and fins of my rocket.
- 2. Motors.** I will use only certified, commercially-made model rocket motors, and will not tamper with these motors or use them for any purposes except those recommended by the manufacturer.
- 3. Ignition System.** I will launch my rockets with an electrical launch system and electrical motor igniters. My launch system will have a safety interlock in series with the launch switch, and will use a launch switch that returns to the "off" position when released.
- 4. Misfires.** If my rocket does not launch when I press the button of my electrical launch system, I will remove the launcher's safety interlock or disconnect its battery, and will wait 60 seconds after the last launch attempt before allowing anyone to approach the rocket.
- 5. Launch Safety.** I will use a countdown before launch, and will ensure that everyone is paying attention and is a safe distance of at least 15 feet away when I launch rockets with D motors or smaller, and 30 feet when I launch larger rockets. If I am uncertain about the safety or stability of an untested rocket, I will check the stability before flight and will fly it only after warning spectators and clearing them away to a safe distance. When conducting a simultaneous launch of more than ten rockets I will observe a safe distance of 1.5 times the maximum expected altitude of any launched rocket.
- 6. Launcher.** I will launch my rocket from a launch rod, tower, or rail that is pointed to within 30 degrees of the vertical to ensure that the rocket flies nearly straight up, and I will use a blast deflector to prevent the motor's exhaust from hitting

- the ground. To prevent accidental eye injury, I will place launchers so that the end of the launch rod is above eye level or will cap the end of the rod when it is not in use.
- 7. Size.** My model rocket will not weigh more than 1,500 grams (53 ounces) at liftoff and will not contain more than 125 grams (4.4 ounces) of propellant or 320 N-sec (71.9 pound-seconds) of total impulse.
- 8. Flight Safety.** I will not launch my rocket at targets, into clouds, or near airplanes, and will not put any flammable or explosive payload in my rocket.
- 9. Launch Site.** I will launch my rocket outdoors, in an open area at least as large as shown in the accompanying table, and in safe weather conditions with wind speeds no greater than 20 miles per hour. I will ensure that there is no dry grass close to the launch pad, and that the launch site does not present risk of grass fires.

LAUNCH SITE DIMENSIONS

Installed Total Impulse (N-sec)	Equivalent Motor Type	Minimum Site Dimensions (ft.)
0.00-1.25	1/4A, 1/2A	50
1.26-2.50	A	100
2.51-5.00	B	200
5.01-10.00	C	400
10.01-20.00	D	500
20.01-40.00	E	1,000
40.01-80.00	F	1,000
80.01-160.00	G	1,000
160.01-320.00	Two Gs	1,500

- 10. Recovery System.** I will use a recovery system such as a streamer or parachute in my rocket so that it returns safely and undamaged and can be flown again, and I will use only flame-resistant or fireproof recovery system wadding in my rocket.
- 11. Recovery Safety.** I will not attempt to recover my rocket from power lines, tall trees, or other dangerous places.

www.nar.org

Important Note: G motors must be sold to and used by adults (18 and up) only.

E2X® (EASY TO ASSEMBLE) LAUNCH SETS

1390 Atomic Sky™

Length: 18 in (45.7 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.4 oz (39.7 g)
 Recovery: Parachute
 Projected Altitude: 1,150 ft (351 m)
 Recommended Engines: A8-3 (First Flight), B4-4, B6-4, B6-6, C6-5, C6-7

1401 Hunter's Choice™ Short Round™

Length: 11.1 in (28.2 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .74 oz (19 g)
 Recovery: Parachute
 Projected Altitude: 575 ft (175 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

Magnum Load™

Length: 18.5 in (47 cm)
 Diameter: 1.35 in (35 mm)
 Estimated Weight: 2 oz (56.7 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 775 ft (236 m)
 Recommended Engines: B4-4 (First Flight), B6-4, C6-5

Each Launch Set includes Estes Astron II™ Launch Pad and Controller (Engines and 9V alkaline battery required – sold separately)



NEW! 1390 Atomic Sky™



NEW! 1401 Hunter's Choice™



AIR ROCKETS

1908 Rocket-Star™ Rocket Launch Set

Rocket 1
 Length: 8.8 in (22.4 cm)
Rocket 2
 Length: 6.1 in (15.5 cm)
 Fins: Foam
 Recovery: Bounce
 Projected Altitude: 50 ft (15.2 m)

4018 Wind Seeker

Rubber band powered airplane
 Length: 19.7 in (50 cm)
 Wingspan: 16.2 in (41.1 cm)

4024 Spin Control

Rubber band powered, handheld helicopter



NEW! 1908 Rocket-Star Rocket Launch Set™



NEW! 4018 Wind Seeker Glider™

NEW! 4024 Spin Control™



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

NEW

READY TO FLY

1100 Pulsar Pink™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5

1101 Alien Green™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5

1102 Rocket Red™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5

1103 Planet Purple™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5

1104 Outer-space Orange™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5

1105 Blast-off Blue™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5

1106 Yellow Star™

Length: 19.8 in (50.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-5



Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

READY TO FLY

2470 Scrappy™

Length: 14.25 in (36.2 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .7 oz (20 g)
Recovery: Parachute
Projected Altitude: 575 ft (175 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2471 Slinger™

Length: 14.25 in (36.2 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .74 oz (21 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2472 Sizzler™

Length: 14.5 in (36.8 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.1 oz (59.5 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2474 Outlaw™

Length: 22 in (55.9 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2 oz (56.7 g)
Recovery: Parachute
Projected Altitude: 750 ft (229 m)
Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2475 Longneck Express™

Length: 23.25 in (59.1 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.4 oz (39.7 g)
Recovery: Parachute
Projected Altitude: 1125 ft (343 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5



Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

ALMOST READY TO FLY

2473 Shooting Star™

Length: 19.25 in (48.9 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2.3 oz (65.2 g)
Recovery: Parachute
Projected Altitude: 725 ft (221 m)
Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2481 Power Patrol™

Length: 20.5 in (52.1 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.6 oz (45.4 g)
Recovery: Parachute
Projected Altitude: 1100 ft (335 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

2482 Solaris™

Length: 18.5 in (47 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.6 oz (45.4 g)
Recovery: Parachute
Projected Altitude: 1125 ft (343 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

2483 Phantom Blue™

Length: 19.3 in (49 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.4 oz (39.7 g)
Recovery: Parachute
Projected Altitude: 1150 ft (351 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

2484 Red Rider™

Length: 18.5 in (47 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.1 oz (59.6 g)
Recovery: Parachute
Projected Altitude: 700 ft (213 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5



Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

ALMOST READY TO FLY

2485 L.G.M. 0095™

Length: 21 in (53.3 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.7 oz (79.5 g)
Recovery: Parachute
Projected Altitude: 650 ft (198 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5

2486 Flying Colors™

Length: 21 in (53.3 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 3 oz (85 g)
Recovery: Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5

2487 Helios™

Length: 18.2 in (46.2 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.8 oz (79.4 g)
Recovery: Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5

2488 Firestorm™

Length: 20.8 in (52.8 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 3 oz (85 g)
Recovery: Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5

INCREASE YOUR ALTITUDE BY 800 FEET!

2256 Booster-60

For use with rockets 2486 Flying Colors™, 2487 Helios™, and 2488 Firestorm™.
Recommended Engine: D12-0

2257 Booster-55

For use with rockets 2484 Red Rider™ and 2485 L.G.M. 0095™.
Recommended Engine: D12-0



Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

E2X® (EASY TO ASSEMBLE)

1954 Red Flare™

Length: 24.4 in (62 cm)
Diameter: 2.6 in (6.6 cm)
Estimated Weight: 6.5 oz (184.3 g)
Recovery: Parachute
Projected Altitude: 1000 ft (305 m)
Recommended Engines: D12-5 (First Flight), E9-4, E9-6

1955 Top Shot™

Length: 37 in (94 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 5.3 oz (150 g)
Recovery: Parachute
Projected Altitude: 1150 ft (351 m)
Recommended Engines: D12-5 (First Flight), E9-6, E12-6

2132 Banshee™

Length: 15.6 in (39.6 cm)
Diameter: 1.1 in (28 mm)
Estimated Weight: 1.6 oz (45.4 g)
Recovery: Parachute
Projected Altitude: 1100 ft (335 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, B6-6, C6-5, C6-7

2158 AGM-57X Heatseeker™

Length: 18.6 in (47.2 cm)
Diameter: 1.1 in (28 mm)
Estimated Weight: 2.0 oz (56.7 g)
Recovery: Parachute
Projected Altitude: 1025 ft (312 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

2431 Dink™

Length: 10 in (25.4 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .6 oz (15.2 g)
Recovery: Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T



Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

E2X[®] (EASY TO ASSEMBLE)

2432 Mix-it Up™

Length: 16.25 in (41.3 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.4 oz (39.7 g)
Recovery: Parachute
Projected Altitude: 1100 ft (335 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, B6-6, C6-5, C6-7

2435 3 Bandits™

3 rocket set
Length: 10.8-11.1 in (27.4-28.3 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .6-.71 oz (19.8-20.1 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2436 Emerald Streak™

Length: 22 in (55.9 cm)
Diameter: 1.1 in (28 mm)
Estimated Weight: 2.0 oz (56.7 g)
Recovery: Parachute
Projected Altitude: 950 ft (290 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

2438 Sky Shark™

Length: 15.1 in (38.4 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .76 oz (21.5 g)
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: 1/2A3-2T (First Flight), 1/2A3-4T, A3-4T, A10-3T

2476 Black Diamond™

Length: 26.25 in (66.7 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 3.3 oz (93.6 g)
Recovery: Parachute
Projected Altitude: 500 ft (152 m)
Recommended Engines: B4-2 (First Flight), B6-2, C6-3



Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

SKILL LEVEL 1

2442 Mini Fat Boy™

Length: 8.5 in (21.6 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 1.3 oz (36.8 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 250 ft (76 m)
Recommended Engines: A10-3T



NEW! 2442 Mini Fat Boy™

3230 Estes Jetliner™

Length: 9.3 in (23.6 cm)
Diameter: 1.64 in (42 mm)
Wingspan: 11 in (27.9 cm)
Estimated Weight: 1.9 oz (53.9 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 150 ft (46 m)
Recommended Engines: A10-3T



NEW! 3230 Estes Jetliner™

3231 Curvilinear™

Length: 10.5 in (27.7 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 1.5 oz (42.5 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 175 ft (53 m)
Recommended Engines: A10-3T



NEW! 3231 Curvilinear™

SKILL LEVEL 2

3232 Centuri™

Length: 29.3 in (74.4 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.1 oz (87.9 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5



NEW! 3232 Centuri™

3233 Blenders™

Length: 2.6 in (6.6 cm)
Diameter: 4.8 in (12.2 cm)
Estimated Weight: .4 oz (11.3 g)
Fins: Laser cut wood
Recovery: Spin
Projected Altitude: 75 ft (23 m)
Recommended Engines: A10-0T (First Flight), A10-PT



NEW! 3233 Blenders™

3234 JBR-013™

Length: 18.4 in (46.7 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 1.9 oz (53.9 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 775 ft (236 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5, Co-7



NEW! 3234 JBR-013™

7221 STM-012™

Length: 44.4 in (112.8 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 5.7 oz (161.6 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 1125 ft (343 m)
Recommended Engines: C11-3 (First Flight), D12-5, E9-4*, E9-6*, E12-6*
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.



NEW! 7221 STM-012™

* E engines require the E™ Launch Controller (2230), sold separately.
Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

SKILL LEVEL 2

7223 Rouge Voyager™

Length: 22.1 in (56.1 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 2.5 oz (70.9 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: B6-4 (First Flight), C6-5

7224 Astron Sprint XL™

Length: 22.8 in (57.9 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 3.4 oz (96.4 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 1300 ft (396 m)
Recommended Engines: C11-3 (First Flight), D12-5, E9-6*, E9-8*, E12-6*, E12-8*
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

SKILL LEVEL 3

7225 Extreme 12™

Length: 46.4 in (117.8 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 7.1 oz (201.3 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 1900 ft (579 m)
Recommended Engines:
Single Stage: D12-3, D12-5 (First Flight), E9-4, E9-6, E12-6
With Booster:
D12-0: D12-5 (First Flight), E9-6, E12-6
E12-0: D12-5 (First Flight), D12-7, E9-6*, E12-6*, E12-8*
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

SKILL LEVEL 4

1351 Cosmic Interceptor™

Length: 40.5 in (102.9 cm)
Diameter: 2 in (51 mm)
Estimated Weight: 10.1 oz (286.3 g)
Fins: Laser cut wood
Recovery: Nylon parachute
Projected Altitude: 625 ft (190 m)
Recommended Engines: D12-3 (First Flight), E9-4, E12-4*, PSII E30-4T
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

SKILL LEVEL 5

7222 Black Star Voyager™

Length: 39.7 in (100.8 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 7 oz (198.4 g)
Fins: Laser cut wood
Recovery: Parachute
Projected Altitude: 1100 ft (336 m)
Recommended Engines: D12-3 (First Flight), E9-4*, E12-4*
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.



* E engines require the E™ Launch Controller (2230), sold separately.

Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

NEW

HELICOPTERS



NEW! 4601

Fully Assembled!

Length: 8.6 in. (21.9 cm)

Width: 1.4 in. (3.6 cm)

Height: 3.9 in. (9.9 cm)

For indoor flight only. Includes 3.7V Lithium Polymer Battery. 3.5 Channel Infrared Controller requires 6 - 1.5V AA alkaline batteries, not included. Recommended for ages 14+.



NEW! 4602

Fully Assembled!

Length: 8.6 in. (21.90 cm)

Width: 2.8 in. (7.1 cm)

Height: 3.7 in. (9.4 cm)

For indoor flight only. Includes 3.7V Lithium Polymer Battery. 3.5 Channel Infrared Controller requires 6 - 1.5V AA alkaline batteries (not included). Recommended for ages 14+.



NEW! 4603

Length: 14.5 in. (36.8 cm)

Width: 2.5 in. (6.4 cm)

Height: 5.8 in. (14.7 cm)

Main Rotor: 11.8 in. (30 cm)

Includes fully assembled helicopter, Radio Controller, Rechargeable 3.7V Li-Po - 500mAh battery, AC Wall Charger, extra blades and instructions. Recommended for ages 14+.



NEW! 4604

Length: 24 in (61 cm)

Width: 3.8 in (9.6 cm)

Height: 8.8 in (22.6 cm)

Main Rotor: 18 in (45.7 cm)

Includes fully assembled helicopter, Radio Controller, Rechargeable 7.4V, 1000mAh battery, AC Wall Charger, extra blades and instructions. Recommended for ages 14+.

Color of product may vary.

NEW

BALSA GLIDERS

3428 Tuff Birds Jet™
 Length: 8.3 in (21.1 cm)
 Wingspan: 12.8 in (32.5)

3429 Tuff Birds Biplane™
 Length: 9.3 in (23.6)
 Wingspan: 10.4 in (26.4)

**3430 Tuff Birds Stratosphere™
 Rubber Band Power**
 Length: 11 in (27.9 cm)
 Wingspan: 12.8 in (32.5 cm)

**3434 Tuff Birds Super Stratosphere™
 Rubber Band Power**
 Length: 14.2 in (36.1 cm)
 Wingspan: 17.5 in (44.5 cm)

3520 Tuff Birds Estes™
 Length: 8.8 in (22.4 cm)
 Wingspan: 9 in (22.9 cm)

FOAM GLIDERS

3600 Manta™ II Glider w/Launch Stick
 Length: 5.8 in (14.7 cm)
 Wingspan: 4 in (10.2 cm)

4011 Falcon Glider™
 Length: 21.2 in (53.9 cm)
 Wingspan: 25.2 in (64 cm)

4013 Spy Glider™
 Length: 25.6 in (65 cm)
 Wingspan: 26.8 in (68.1 cm)

**4014 Hydra™, Condor™ and Hothead™
 Rubber Band Power**
 Length: 12 in (30.5 cm)
 Wingspan: 13.5 in (34.3 cm)



3428 Tuff Birds Jet™



3429 Tuff Birds Biplane™



**3430 Tuff Birds
 Stratosphere™
 Rubber Band Power**



**3434 Tuff Birds
 Super Stratosphere™
 Rubber Band Power**



3520 Tuff Birds Estes™



4011 Falcon Glider™



4013 Spy Glider™



3600 Manta™ II Glider



4014 Condor™



4014 Hydra™



4014 Hothead™

GLIDERS

PRO SERIES II™

9700 Leviathan™

Length: 41.5 in (105.4 cm)
Diameter: 3 in (7.6 cm)
Estimated Weight: 17.5 oz (496.1 g)
Fins: Laser cut plywood
Recovery: 24 in (60 cm) Nylon Parachute
Projected Altitude: 1,500 ft (457 m)
Recommended Motors: F26-6FJ, F50-6T, G40-7W, G80-7T

9701 Ventris™

Length: 46.25 in (117.5 cm)
Diameter: 2.5 in (6.4 cm)
Estimated Weight: 15.6 oz (442.3 g)
Fins: Laser cut plywood
Recovery: 24 in (60 cm) Nylon Parachute
Projected Altitude: 2,000 ft (610 m)
Recommended Motors: F26-6FJ, F50-6T, G40-7W, G80-7T

9702 Partizon™

Length: 56 in (142.2 cm)
Diameter: 2.5 in (6.4 cm)
Estimated Weight: 19.1 oz (541.5 g)
Fins: Laser cut plywood
Recovery: 24 in (60 cm) Nylon Parachute
Projected Altitude: 1,800 ft (549 m)
Recommended Motors: F26-6FJ, F50-6T, G40-7W, G80-7T

9703 Argent™

Length: 56.4 in (143.3 cm)
Diameter: 2.5 in (6.4 cm)
Estimated Weight: 16.5 oz (467.6 g)
Fins: Laser cut plywood
Recovery: 24 in (60 cm) Nylon Parachute
Projected Altitude: 1,700 ft (518 m)
Recommended Motors: F26-6FJ, F50-6T, G40-7W, G80-7T



Pro Series II rockets, require a launch controller with 30 feet of wire, such as our E™ Launch Controller (2230). In addition to the launch controller, you will need a sturdy launch pad with a 1/4" (6 mm) launch rod, or you can purchase our 3552 Estes Pro Series II Launch Pad.

G motors require users to be ages 18 years and up.

PRO SERIES II™

PRO SERIES II™

9704 Nike Smoke 1 to 5.5 scale model

Length: 41.8 in (106.2 cm)
 Diameter: 3 in (7.6 cm)
 Estimated Weight: 17.5 oz (496.1 g)
 Fins: 2 piece plastic
 Recovery: 24 in (60 cm) Nylon Parachute
 Projected Altitude: 1,500 ft (457 m)
 Recommended Motors: F26-6FJ, F50-6T, G40-7W, G80-7T

9705 Mega Der Red Max™

Length: 40 in (101.6 cm)
 Diameter: 4 in (10.2 cm)
 Estimated Weight: 31 oz (878.9 g)
 Fins: Laser cut plywood with wood laminate
 Recovery: 30 in (76 cm) Nylon Parachute
 Projected Altitude: 500 ft (457 m)
 Recommended Motors: F50-6T, G40-7W, G80-7T

PRO SERIES II™ ACCESSORIES

2261 24 in Nylon Parachute
 2273 30 in Nylon Parachute
 3552 Pro Series II™ Launch Base
 3556 Pro Series II™ Recovery Wadding (39 strips)
 2305 Sonic Igniter (4)
 9750 29 mm Motor Retainer Set (2 sets)

PRO SERIES II™ MODEL ROCKET MOTORS

(1 per pack)

9770 E30-4T Motor
 9771 E30-7T Motor
 9772 F26-6FJ Motor
 9773 F50-4T Motor
 9774 F50-6T Motor
 9775 G40-4W Motor
 9776 G40-7W Motor
 9777 G80-7T Motor
 9778 G80-10T Motor



Not all shown.



2305 Sonic Igniter



**3556 Pro Series II™
Recovery Wadding**



**NEW! 9750 29 mm Motor
Retainer Set™**



**3552 Pro Series II™
Launch Base**



Pro Series II rockets, require a launch controller with 30 feet of wire, such as our E™ Launch Controller (2230). In addition to the launch controller, you will need a sturdy launch pad with a 1/4" (6 mm) launch rod, or you can purchase our 3552 Estes Pro Series II Launch Pad.

G motors require users to be ages 18 years and up.

PRO SERIES II™

RTF (READY TO FLY) LAUNCH SETS

1403 Riptide™ Launch Set

Length: 18 in (45.7 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2.7 oz (76.5 g)
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 675 ft (206 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

1460 Eliminator XL™ Launch Set

Length: 44.25 in (112.4 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 5.6 oz (158.8 g)
Fins: Plastic
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 1,400 ft (427 m)
Recommended Engines: D12-3 (First Flight), E9-6*, E9-8*
*Requires 3/16 in (5 mm) Maxi™ Launch Rod (2244), included.

1499 Rascal™ & Hijinks™ Launch Set

Rascal™
Length: 14 in (35.6 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.5 oz (43 g)
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,200 ft (366 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7
Hijinks™
Length: 14 in (35.6 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.5 oz (43 g)
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,200 ft (366 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

E2X® (EASY TO ASSEMBLE) LAUNCH SETS

1424 Silver Arrow™ Launch Set

Length: 15 in (38 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (36.9 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,125 ft (343 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, B6-6, C6-5, C6-7

1425 Manta™ II Launch Set

Length: 15 in (38 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (36.9 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4

1427 Alpha® III Launch Set

Length: 12.3 in (31.2 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.2 oz (34 g)
Fins: Plastic
Projected Altitude: 1,150 ft (351 m)
Recovery: 12 in (30.5 cm) Parachute
Recommended Engines: A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7



Each Launch Set includes Estes Launch Pad and Controller
(Engines and alkaline batteries required – sold separately)

* E engines require the E™ Launch Controller (2230),
sold separately.

LAUNCH SETS

E2X® (EASY TO ASSEMBLE) LAUNCH SETS

1438 Sky Twister™ Launch Set

Length: 19.3 in (49 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2.9 oz (82.2 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute and helicopter nose cone
Projected Altitude: 650 ft (198 m)
Recommended Engines: B4-2, B6-2 (First Flight), B6-4, C6-3, C6-5

1462 Shuttle Xpress™

Length: 17.7 in (45 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.2 oz (90.7 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute, Shuttles - glide
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-2 (First Flight), B4-4, B6-2, B6-4, C6-3, C6-5

1465 HeliCat™

Length: 30.25 in (76.8 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 3.5 oz (99 g)
Fins: Plastic
Recovery: 18 in (46 cm) Parachute; Nose Cone - Helicopter
Projected Altitude: 550 ft (168 m)
Recommended Engines: B4-2, B6-2 (First Flight), C6-3, C6-5

1469 Tandem-X™

Amazon™
Length: 33.6 in (85.3 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.3 oz (94 g)
Fins: Plastic
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-2 (First Flight), B4-4, B6-2, B6-4, C6-3, C6-5
Crossfire 1SX™
Skill Level 1
Length: 15.6 in (39.6 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (37 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,150 ft (351 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

1475 Solar Scouts™

Sky Dart™
Length: 10.3 in (26.2 cm)
Diameter: .54 in (14 mm)
Estimated Weight: .4 oz (11.3 g)
Fins: Plastic
Recovery: Streamer
Projected Altitude: 950 ft (290 m)
Recommended Engines: 1/2A3-2T (First Flight), 1/2A3-4T, A3-4T, A10-3T
Farside™
Length: 16.5 in (41.9 cm)
Diameter: 1.1 in (28 mm)
Estimated Weight: 1.6 oz (45.4 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,100 ft (335 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, B6-6, C6-5, C6-7



Each Launch Set includes Estes Launch Pad and Controller
(Engines and alkaline batteries required – sold separately)

Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

LAUNCH SETS

E2X® (EASY TO ASSEMBLE) LAUNCH SETS

1476 Moon Mutt™

Length: 10 in (25.4 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .65 oz (18.4 g)
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 200 ft (61 m)
Recommended Engines: 1/4A3-3T (First Flight), 1/2A3-2T

1478 Flash!

Length: 16.2 in (41.2 cm)
Diameter: 1.1 in (28 mm)
Estimated Weight: 1.8 oz (52 g)
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 925 ft (282 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

1491 Taser™

Length: 16.5 in (41.9 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.5 oz (42.5 g)
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,100 ft (335 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, B6-6, C6-5, C6-7

1497 Customizer™ Mini

Build and design your own concept rockets! This kit will turn YOU into a MODEL ROCKET DESIGNER! Many combinations of the 24 parts included allow you to create 12 possible rockets. From the E2X® line, all parts are pre-colored and you simply glue together. You can build one taller rocket or two other rockets. You're the designer here, you choose!
Recommended Engines: 1/2A3-2T (First Flight) A3-4T, A10-3T

SKILL LEVEL 2 LAUNCH SET

1466 Maxi Alpha™ 3

Skill Level: 2
Length: 33.25 in (84.5 cm)
Diameter: 2.6 in (66 mm)
Estimated Weight: 8 oz (226.8 g)
Fins: Plastic
Recovery: 24 in (61 cm) Parachute
Projected Altitude: 700 ft (213 m)
Recommended Engines: D12-3, E9-4*, E9-6*
Requires 3/16 in (5 mm) Maxi™ Launch Rod (2244), included.

AIR ROCKET LAUNCH SET

1900 T-Bolt™ Air Rocket Launch Set

Ready to fly
Length: 11.5 in (29.2 cm)
Estimated Weight: .87 oz (24.7 g)
Fins: Foam
Recovery: Bounce
Projected Altitude: 150 ft (46 m)

Each Launch Set includes Estes Launch Pad and Controller

(Engines and alkaline batteries required – sold separately)



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

LAUNCH SETS

READY TO FLY ROCKETS

1894 Sky Hawker™

Length: 16.5 in (41.9 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.5 oz (42.5 g)
 Recovery: 12 in (30.5 cm)
 Projected Altitude: 1,125 ft (343 m)
 Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

1895 Patriarch™

Length: 18 in (45.7 cm)
 Diameter: 1.35 in (34 mm)
 Estimated Weight: 2.7 oz (76.5 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 675 ft (206 m)
 Recommended Engines: B4-4, B6-4 (First Flight), C6-5

1896 Puma™

Length: 10.3 in (26 cm)
 Diameter: .54 in (14 mm)
 Estimated Weight: .4 oz (12 g)
 Recovery: Streamer
 Projected Altitude: 800 ft (244 m)
 Recommended Engines: 1/2A3-2T (First Flight), 1/2A3-4T, A3-4T, A10-3T

1906 Rascal™

Length: 14 in (35.6 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.5 oz (43 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 1,200 ft (366 m)
 Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

1907 HiJinks™

Length: 14 in (35.6 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.5 oz (43 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 1,200 ft (366 m)
 Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

2450 EX-200™

Length: 14.25 in (36.2 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .78 oz (22.1 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 550 ft (168 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2451 Fuse™

Length: 13.1 in (33.3 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .78 oz (22.1 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 550 ft (168 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2452 Athena™

Length: 16.5 in (41.9 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.4 oz (39.7 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 1,125 ft (343 m)
 Recommended Engines: A8-3 (First Flight), B6-4, C6-5



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

READY TO FLY

READY TO FLY ROCKETS

2453 Summit™

Length: 20.25 in (51.4 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .85 oz (24.1 g)
 Recovery: Streamer
 Projected Altitude: 525 ft (160 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2454 SkyTrax™

Length: 20.75 in (52.7 cm)
 Diameter: 1.35 in (34 mm)
 Estimated Weight: 2.6 oz (73.7 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 675 ft (206 m)
 Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2455 Code Red™

Length: 18.75 in (47.6 cm)
 Diameter: 1.35 in (34 mm)
 Estimated Weight: 2.2 oz (62.4 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 725 ft (221 m)
 Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2456 LoadStar™

Length: 22.6 in (57.4 cm)
 Diameter: 1.33 in (34 mm)
 Estimated Weight: 2.2 oz (62.4 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 725 ft (221 m)
 Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2457 Prospector™

Length: 23 in (58.4 cm)
 Diameter: 1.35 in (34 mm)
 Estimated Weight: 2.4 oz (68 g)
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 700 ft (213 m)
 Recommended Engines: B4-4, B6-4 (First Flight), C6-5

2460 Fat Jax™

Length: 12.6 in (32 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .72 oz (20.4 g)
 Fins: Plastic
 Recovery: 6 in (15.2 cm) Parachute
 Projected Altitude: 425 ft (130 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2461 Nitro™

Length: 12.6 in (32 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .69 oz (19.6 g)
 Fins: Plastic
 Recovery: 6 in (15.2 cm) Parachute
 Projected Altitude: 425 ft (130 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2462 Sky Duster™

Length: 12.9 in (32.8 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .74 oz (21 g)
 Fins: Plastic
 Recovery: 6 in (15.2 cm) Parachute
 Projected Altitude: 425 ft (130 m)
 Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

READY TO FLY

E2X® (EASY TO ASSEMBLE) ROCKET KITS

0803 Bandito™

Length: 11.2 in (28.4 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .60 oz (17 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: 1/4A3-3T (First Flight),
1/2A3-2T, A3-4T, A10-3T



0803 Bandito™

0804 Firehawk™

Length: 11.2 in (28.4 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .65 oz (18.4 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: 1/4A3-3T (First Flight),
1/2A3-2T, A3-4T, A10-3T



0804 Firehawk™

0806 Firestreak SST™

Length: 10.2 in (25.9 cm)
Diameter: .86 in (22 mm)
Estimated Weight: 1.1 oz (31.2 g)
Fins: Plastic
Recovery: Streamer
Projected Altitude: 350 ft (107 m)
Recommended Engines: 1/2A3-2T,
A3-4T (First Flight), A10-3T



0806 Firestreak SST™

0886 Gnome™

Length: 10.3 in (26.2 cm)
Diameter: .54 in (14 mm)
Estimated Weight: .5 oz (14.2 g)
Fins: Plastic
Recovery: Streamer
Projected Altitude: 800 ft (244 m)
Recommended Engines: 1/2A3-2T (First Flight),
1/2A3-4T, A3-4T, A10-3T



0886 Gnome™

1256 Alpha III®

Length: 12.3 in (31.2 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.2 oz (34 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,100 ft (335 m)
Recommended Engines: 1/2A6-2, A8-3 (First Flight),
B4-4, B6-4, B6-6, C6-5, C6-7



1256 Alpha III®

1260 No. 2 Estes Sky Writer®

Length: 26 in (66 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.5 oz (42.5 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,100 ft (335 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4,
C6-5



1260 No. 2 Estes Sky Writer®

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.



E2X® (EASY TO ASSEMBLE) ROCKET KITS

1263 Sky Twister™

Length: 19.3 in (49 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2.9 oz (82.2 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute and helicopter nose cone
Projected Altitude: 650 ft (198 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5

1300 Blue Ninja™

Length: 31.3 in (79.5 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 5.1 oz (145.4 g)
Fins: Plastic
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 780 ft (238 m)
Recommended Engines: C11-3 (First Flight), D12-3
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

1330 Freefall™

Length: 20.5 in (52.1 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.5 oz (71 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 575 ft (175 m)
Recommended Engines: B4-2 (First Flight), B6-2, B6-4, C6-3, C6-5

1950 Eliminator™

Length: 30.8 in (78.2 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 4.6 oz (130 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,400 ft (427 m)
Recommended Engines: D12-5 (First Flight), D12-7, E9-6*, E9-8*
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.



* E engines require the E™ Launch Controller (2230), sold separately.

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

E2X®

E2X[®] (EASY TO ASSEMBLE) ROCKET KITS

2168 Metalizer™

Length: 22.5 in (57.2 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2.4 oz (68 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 760 ft (232 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

2169 Dragonite™

Length: 16 in (40.6 cm)
Diameter: 1.1 in (28 mm)
Estimated Weight: 1.8 oz (51 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,125 ft (343 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7

2183 Shuttle Xpress™

Length: 17.7 in (45 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.2 oz (90.7 g)
Fins: Plastic
Recovery: Booster - 12 in (30.5 cm) Parachute;
Shuttles - Glide
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-2 (First Flight), B4-4, B6-2, B6-4, C6-3, C6-5

2430 Gold Strike™

Length: 18.75 in (47.6 cm)
Diameter: 1.35 in (34 mm)
Estimated Weight: 2.2 oz (61.5 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 725 ft (221 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

Bonus Rocket: Silver Streak™

Length: 10.25 in (26 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .6 oz (17 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 550 ft (168 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2433 Zinger™

Length: 15 in (38.1 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .9 oz (25.5 g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 500 ft (152 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T

2434 Silver Streak™

Length: 10 in (25.4 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .65 oz (18.4 g)
Fins: Plastic
Recovery: 6 in (15.2 cm) Parachute
Projected Altitude: 575 ft (176 m)
Recommended Engines: 1/2A3-4T (First Flight), A3-4T, A10-3T



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

E2X[®]

SKILL LEVEL 1 ROCKET KITS

0651 Der Red Max™

Length: 16.3 in (41.4 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 2.4 oz (68 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 600 ft (183 m)
 Recommended Engines: B6-2 (First Flight), B6-4, C6-5



0802 Quark™

Length: 5.2 in (13.2 cm)
 Diameter: .54 in (14 mm)
 Estimated Weight: .1 oz (3 g)
 Fins: Laser cut wood
 Recovery: Tumble
 Projected Altitude: 850 ft (259 m)
 Recommended Engines: 1/4A3-3T (First Flight), 1/2A3-2T, 1/2A3-4T, A3-4T, A10-3T



0810 220 Swift™

Length: 4.5 in (11.4 cm)
 Diameter: .54 in (14 mm)
 Estimated Weight: .09 oz (2.5 g)
 Fins: Laser cut wood
 Recovery: Tumble
 Projected Altitude: 850 ft (259 m)
 Recommended Engines: 1/4A3-3T (First Flight), 1/2A3-2T, 1/2A3-4T, A3-4T, A10-3T



1225 Alpha®

Length: 12.3 in (31.2 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: .8 oz (23 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 1,000 ft (305 m)
 Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7



1261 Baby Bertha™

Length: 12.75 in (32.4 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 1.9 oz (53.9 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 575 ft (175 m)
 Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5



1292 Wizard™

Length: 12 in (30.5 cm)
 Diameter: .74 in (19 mm)
 Estimated Weight: .5 oz (14.2 g)
 Fins: Laser cut wood
 Recovery: Streamer
 Projected Altitude: 1,600 ft (488 m)
 Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1

SKILL LEVEL 1 ROCKET KITS

1345 Mosquito™

Length: 3.8 in (9.6 cm)
Diameter: .54 in (14 mm)
Estimated Weight: .11 oz (3.1 g)
Fins: Laser cut wood
Recovery: Tumble
Projected Altitude: 800 ft (244 m)
Recommended Engines: 1/4A3-3T (First Flight), 1/2A3-2T, 1/2A3-4T, A3-4T, A10-3T



1381 Yankee™

Length: 11 in (27.9 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .4 oz (12 g)
Fins: Laser cut wood
Recovery: Streamer
Projected Altitude: 1,850 ft (564 m)
Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7



1948 Big Bertha™

Length: 24 in (61 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.5 oz (71 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) parachute
Projected Altitude: 500 ft (152 m)
Recommended Engines: B4-2, B4-4, B6-2, B6-4 (First Flight), C6-5




1949 Viking™

Length: 12.1 in (30.7 cm)
Diameter: .74 in (19 mm)
Estimated Weight: .6 oz (17 g)
Fins: Card stock
Recovery: Streamer
Projected Altitude: 1,600 ft (488 m)
Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7



1960 Nova Payloader™

Length: 21.1 in (53.6 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (38 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,000 ft (305 m)
Recommended Engines:
With payload: B4-4 (First Flight), B6-4, C6-5
Without payload: A8-3 (First Flight), B4-4, B6-4, C6-5

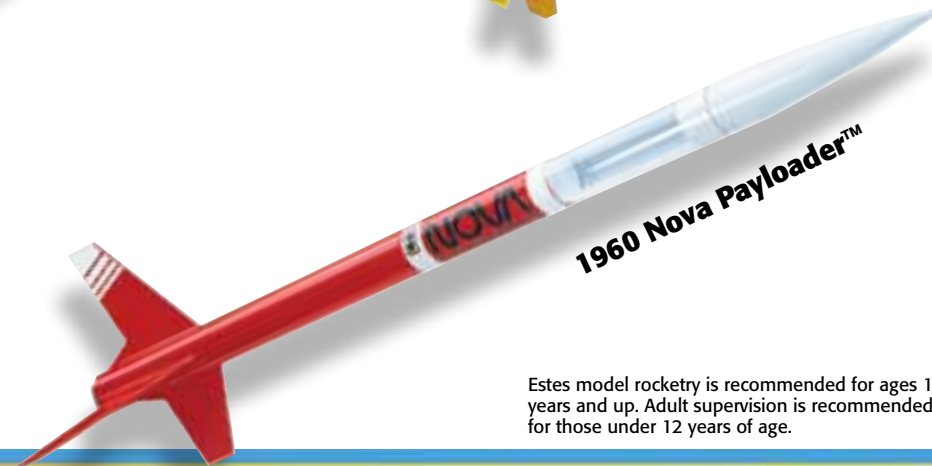

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1

SKILL LEVEL 1 ROCKET KITS

2056 U.S. Army Patriot M-104

Length: 21.3 in (54.1 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2 oz (56.7 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

2092 Mongoose™

Length: 26.5 in (67.3 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 2.3 oz (65g)
Fins: Plastic
Recovery: 12 in (30.5 cm) Parachute and Tumble
Projected Altitude: 1,600 ft (488 m)
Recommended Engines:
Single Stage: A8-3 (First Flight), B4-4, B6-4, C6-5;
Two Stage: Booster – B6-0 (First Flight), C6-0;
Upper Stage: A8-5 (First Flight), B6-6, C6-7

2178 Hi-Flier®

Length: 12 in (30.5 cm)
Diameter: .74 in (19 mm)
Estimated Weight: 1.1 oz (31.2 g)
Fins: Laser cut wood
Recovery: Streamer
Projected Altitude: 1,500 ft (457 m)
Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7

2421 Cosmic Explorer™

Length: 24 in (61 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.8 oz (78 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 650 ft (198 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

2422 Reflector™

Length: 20.25 in (51.4 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.1 oz (60 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 750 ft (228 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

2444 Fletcher™

Length: 39.25 in (99.7 cm)
Diameter: .74 in (19 mm)
Estimated Weight: 1.4 oz (39.7 g)
Fins: Laser cut wood
Recovery: 6 in (15.2 cm) Parachute
Projected Altitude: 325 ft (99 m)
Recommended Engines: A3-4T (First Flight), A10-3T



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1

SKILL LEVEL 1 ROCKET KITS

2445 Mini Max™

Length: 8.8 in (22.4 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.3 oz (37 g)
 Fins: Laser cut wood
 Recovery: Streamer
 Projected Altitude: 300 ft (91.5 m)
 Recommended Engines: 1/2A3-2T (First Flight),
 1/2A3-4T, A3-4T, A10-3T



2445 Mini Max™



2446 Mini Honest John

2446 Mini Honest John


Length: 11.75 in (29.8 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.2 oz (34 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 325 ft (99 m)
 Recommended Engines: 1/2A3-2T (First Flight), A3-4T,
 A10-3T

3009 Chuter-Two™

Length: 18.5 in (47 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.2 oz (34 g)
 Fins: Laser cut wood
 Recovery: 2 12 in (30.5 cm) Parachutes
 Projected Altitude: 900 ft (274 m)
 Recommended Engines: A8-3 (First Flight), B6-4, C6-5



3009 Chuter-Two™

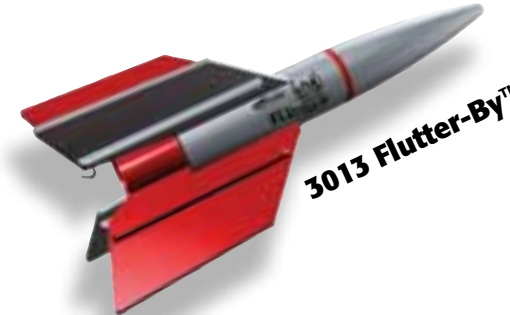

3013 Flutter-By™

3013 Flutter-By™

Length: 8.25 in (21 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.4 oz (39.7 g)
 Fins: Laser cut wood
 Recovery: Tumble
 Projected Altitude: 575 ft (175 m)
 Recommended Engines: 1/2A6-2, A8-3 (First Flight),
 B4-2, B4-4, B6-2, B6-4

3022 Payloader II™

Length: 17 in (43 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.2 oz (62.4 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 1,000 ft (305 m)
 Recommended Engines: A8-3 (First Flight), B6-4, C6-5



3022 Payloader II™

3024 Phoenix Bird™

Length: 24 in (61 cm)
 Diameter: 1.33 in (34 mm)
 Estimated Weight: 2.8 oz (79 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 550 ft (168 m)
 Recommended Engines: B4-4 (First Flight), B6-4, C6-5



3024 Phoenix Bird™

SKILL LEVEL 1

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1 ROCKET KITS

3031 Star Trooper™

Length: 7.4 in (18.8 cm)
Diameter: .54 in (14 mm)
Estimated Weight: .3 oz (8.5 g)
Fins: Laser cut wood
Recovery: Streamer
Projected Altitude: 900 ft (274 m)
Recommended Engines: A3-4T (First Flight), A10-3T



3033 Twister™

Length: 13.8 in (35 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.1 oz (31 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,100 ft (335 m)
Recommended Engines: A8-3 (First Flight) B6-4, C6-5



3037 Hornet

Length: 19.25 in (48.9 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.3 oz (65 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 775 ft (236 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5



3201 Taser Twin™

Length: 15.4 in (39 cm)
Diameter: .74 in (19 mm)
Estimated Weight: 1.8 oz (51 g)
Fins: Laser cut wood
Recovery: Tumble/Streamer
Projected Altitude: 2,000 ft (610 m)
Recommended Engines: B6-0 (First Flight), B6-6 (First Flight), C6-0, C6-7



3202 Comet Chaser™

Length: 14.4 in (36.5 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (36.8 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,150 ft (351 m)
Recommended Engines: A8-3 (First Flight), B6-4, C6-5, C6-7



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1
ROCKET KITS

SKILL LEVEL 1 ROCKET KITS

3205 Fusion X25™

Length: 13.5 in (34 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (35.4 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,150 ft (350.5 m)
Recommended Engines: A8-3 (First Flight), B6-4, C6-5



3206 Star Stryker™

Length: 16.8 in (42.7 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.1 oz (30 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,175 ft (358 m)
Recommended Engines: A8-3 (First Flight), B6-4, C6-5



3208 Ricochet™

Length: 22 in (55.9 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.5 oz (41 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1,125 ft (343 m)
Recommended Engines: A8-3 (First Flight), B6-4, C6-5



3209 Space Eagle™

Length: 26.75 in (67.9 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 2.2 oz (62.4 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 975 ft (297 m)
Recommended Engines: B6-4 (First Flight), C6-5



3210 Vector Force™

Length: 28.25 in (71.8 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.4 oz (67 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 725 ft (221 m)
Recommended Engines: B6-4 (First Flight), C6-5



Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1

SKILL LEVEL 1 ROCKET KITS

3211 Plasma Probe™

Length: 18.5 in (47 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 1.7 oz (48.1 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 800 ft (244 m)
Recommended Engines: B6-4 (First Flight), C6-5



3211 Plasma Probe™

3216 Super Alpha®

Length: 19.5 in (49.5 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 2.2 oz (62.3 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 600 ft (183 m)
Recommended Engines: B6-4 (First Flight), C6-5



3216 Super Alpha®

7214 Monarch™

Length: 22.5 in (57.1 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.4 oz (68 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 700 ft (228 m)
Recommended Engines: B6-4 (First Flight), C6-5



7214 Monarch™

7215 Stratocruiser™

Length: 23.5 in (59.7 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.2 oz (62.4 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 725 ft (221 m)
Recommended Engines: B6-4 (First Flight), C6-5



7215 Stratocruiser™

7220 Crossfire ISX™

Length: 15.6 in (39.6 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 1.3 oz (37 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 1150 ft (351 m)
Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5, C6-7



7220 Crossfire ISX™

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 1

SKILL LEVEL 2 ROCKET KITS

1302 CC Express™

Length: 28.4 in (72.1 cm)
 Diameter: 1.33 in (34 mm)
 Estimated Weight: 2.7 oz (76.5 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 1,700 ft (518 m)
 Recommended Engines: Single Stage Only: D12-5;
 Two-Stage: Booster - D12-0; Upper - D12-7
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

1295 Mean Machine™

Length: 79 in (200.7 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 5.8 oz (164 g)
 Fins: Laser cut wood
 Recovery: 24 in (61 cm) Parachute
 Projected Altitude: 900 ft (274 m)
 Recommended Engines: D12-3, D12-5 (First Flight), E9-4*, E9-6*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

1335 Mega Mosquito™

Length: 18.6 in (47.2 cm)
 Diameter: 2.6 in (66 mm)
 Estimated Weight: 5.2 oz (147.4 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 750 ft (229 m)
 Recommended Engines: D12-3 (First Flight), E9-4*, E9-6*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

Bonus rocket: Mosquito™

Skill Level: 1
 Length: 3.8 in (9.6 cm)
 Diameter: .54 in (14 mm)
 Estimated Weight: .11 oz (3.1 g)
 Fins: Laser cut wood
 Recovery: Tumble
 Projected Altitude: 800 ft (244 m)
 Recommended Engines: 1/4A3-3T (First Flight), 1/2A3-2T, A3-4T, A10-3T

1903 Maxi Alpha™ 3

Length: 33.25 in (84.5 cm)
 Diameter: 2.6 in (66 mm)
 Estimated Weight: 6.6 oz (187 g)
 Fins: Plastic
 Recovery: 24 in (61 cm) Parachute
 Projected Altitude: 700 ft (213 m)
 Recommended Engines:
 D12-3 (First Flight), E9-4*, E9-6*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

2037 D-Region Tomahawk

Length: 38.8 in (98.6 cm)
 Diameter: 1.8 in (46 mm)
 Estimated Weight: 9.2 oz (260 g)
 Fins: Plastic
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 750 ft (229 m)
 Recommended Engines: D12-5 (First Flight), E9-6*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

2117 Screaming Eagle®

Length: 16.75 in (42.5 cm)
 Diameter: 1 in (25 mm)
 Estimated Weight: 2.3 oz (65.2 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 600 ft (183 m)
 Recommended Engines: B4-4 (First Flight), B6-4, C6-5



*E engines require the E Launch Controller (2230), sold separately.

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 2

SKILL LEVEL 2 ROCKET KITS

2123 EggsCaliber™

Length: 20 in (50.8 cm)
Diameter: 1 in (25 mm)
Estimated Weight (without egg): 2.6 oz (74 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute and 18 in (46 cm) Parachute
Projected Altitude: 1700 ft (518 m) without egg
Recommended Engines: With egg – B6-2 (First Flight), C6-3, C11-3, D12-3, E9-4*; Without egg – B4-2 (First Flight), B6-2, C6-5, D12-5, E9-6*
Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

2162 Big Daddy™

Length: 19 in (48.3 cm)
Diameter: 3 in (76 mm)
Estimated Weight: 5.3 oz (150 g)
Fins: Laser cut wood
Recovery: 24 in (61 cm) Parachute
Projected Altitude: 900 ft (274 m)
Recommended Engines: C11-3 (First Flight), D12-3, D12-5, E9-4*, E9-6*
Requires 3/16 in (5 mm) Maxi™ Launch Rod (2244), sold separately.

2179 Guardian™

Length: 19.1 in (48.5 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.4 oz (68 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 700 ft (213 m)
Recommended Engines: B4-4 (First Flight), B6-4, B6-6, C6-5

2401 Solar Flare™

Length: 27 in (68.6 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 3.2 oz (90.7 g)
Fins: Laser cut wood and paper rings
Recovery: 12 in (30.5 cm) Parachute and Tumble
Projected Altitude: 800 ft (244 m)
Recommended Engines: Single Stage - A10-3T;
Two Stage: Booster Stage - B6-0 or C6-0;
Second Stage - A10-3T

2447 Astron Elliptic II™

Length: 23.3 in (59.2 cm)
Diameter: .74 in (19 mm)
Estimated Weight: 1 oz (28.3 g)
Fins: Laser cut wood
Recovery: Streamer and Tumble
Projected Altitude: 925 ft (282 m)
Recommended Engines:
Single Stage: 1/2A3-2T (First Flight), A3-4T, A10-3T
Two Stage: Booster – A10-0T
Upper – 1/2A3-4T (First Flight), 1/4A3-3T, A3-4T, A10-3T



* E engines require the E Launch Controller (2230), sold separately.

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 2

SKILL LEVEL 2 ROCKET KITS

2448 Mini Comanche-3™

Length: 31.1 in (79 cm)
Diameter: .74 in (19 mm)
Estimated Weight: 1.5 oz (42.5 g)
Fins: Laser cut wood
Recovery: Streamer
Projected Altitude: 900 ft (274 m)
Recommended Engines:
Single Stage: 1/2A3-2T (First Flight), A3-4T, A10-3T
Two or Three Stage:
Booster and Second Stage: A10-0T
Upper Stage: 1/4A3-3T (First Flight), 1/2A3-2T, A3-4T, A10-3T

3003 Alien Invader™

Length: 20.2 in (51.3 cm)
Diameter: .98 in (25 mm)
Estimated Weight: 2.4 oz (68 g)
Fins: Laser cut wood
Recovery: 12 in (30.5 cm) Parachute
Projected Altitude: 900 ft (274 m)
Recommended Engines:
B4-4 (First Flight), B6-4, C6-5

3016 Long Tom™


Length: 33.25 in (84.4 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.2 oz (91 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 1,100 ft (335 m)
Recommended Engines:
Single Stage: B6-4 (First Flight), C6-5
Two Stage: Booster – B6-0, C6-0
Upper Stage: B6-6 (First Flight), C6-7

3025 Photon Disruptor™

Length: 24.5 in (62.2 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 2.4 oz (68 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 750 ft (229 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

3026 Photon Probe™

Length: 23 in (58.4 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.5 oz (99.2 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 575 ft (175 m)
Recommended Engines: B4-4 (First Flight), B6-4, C6-5

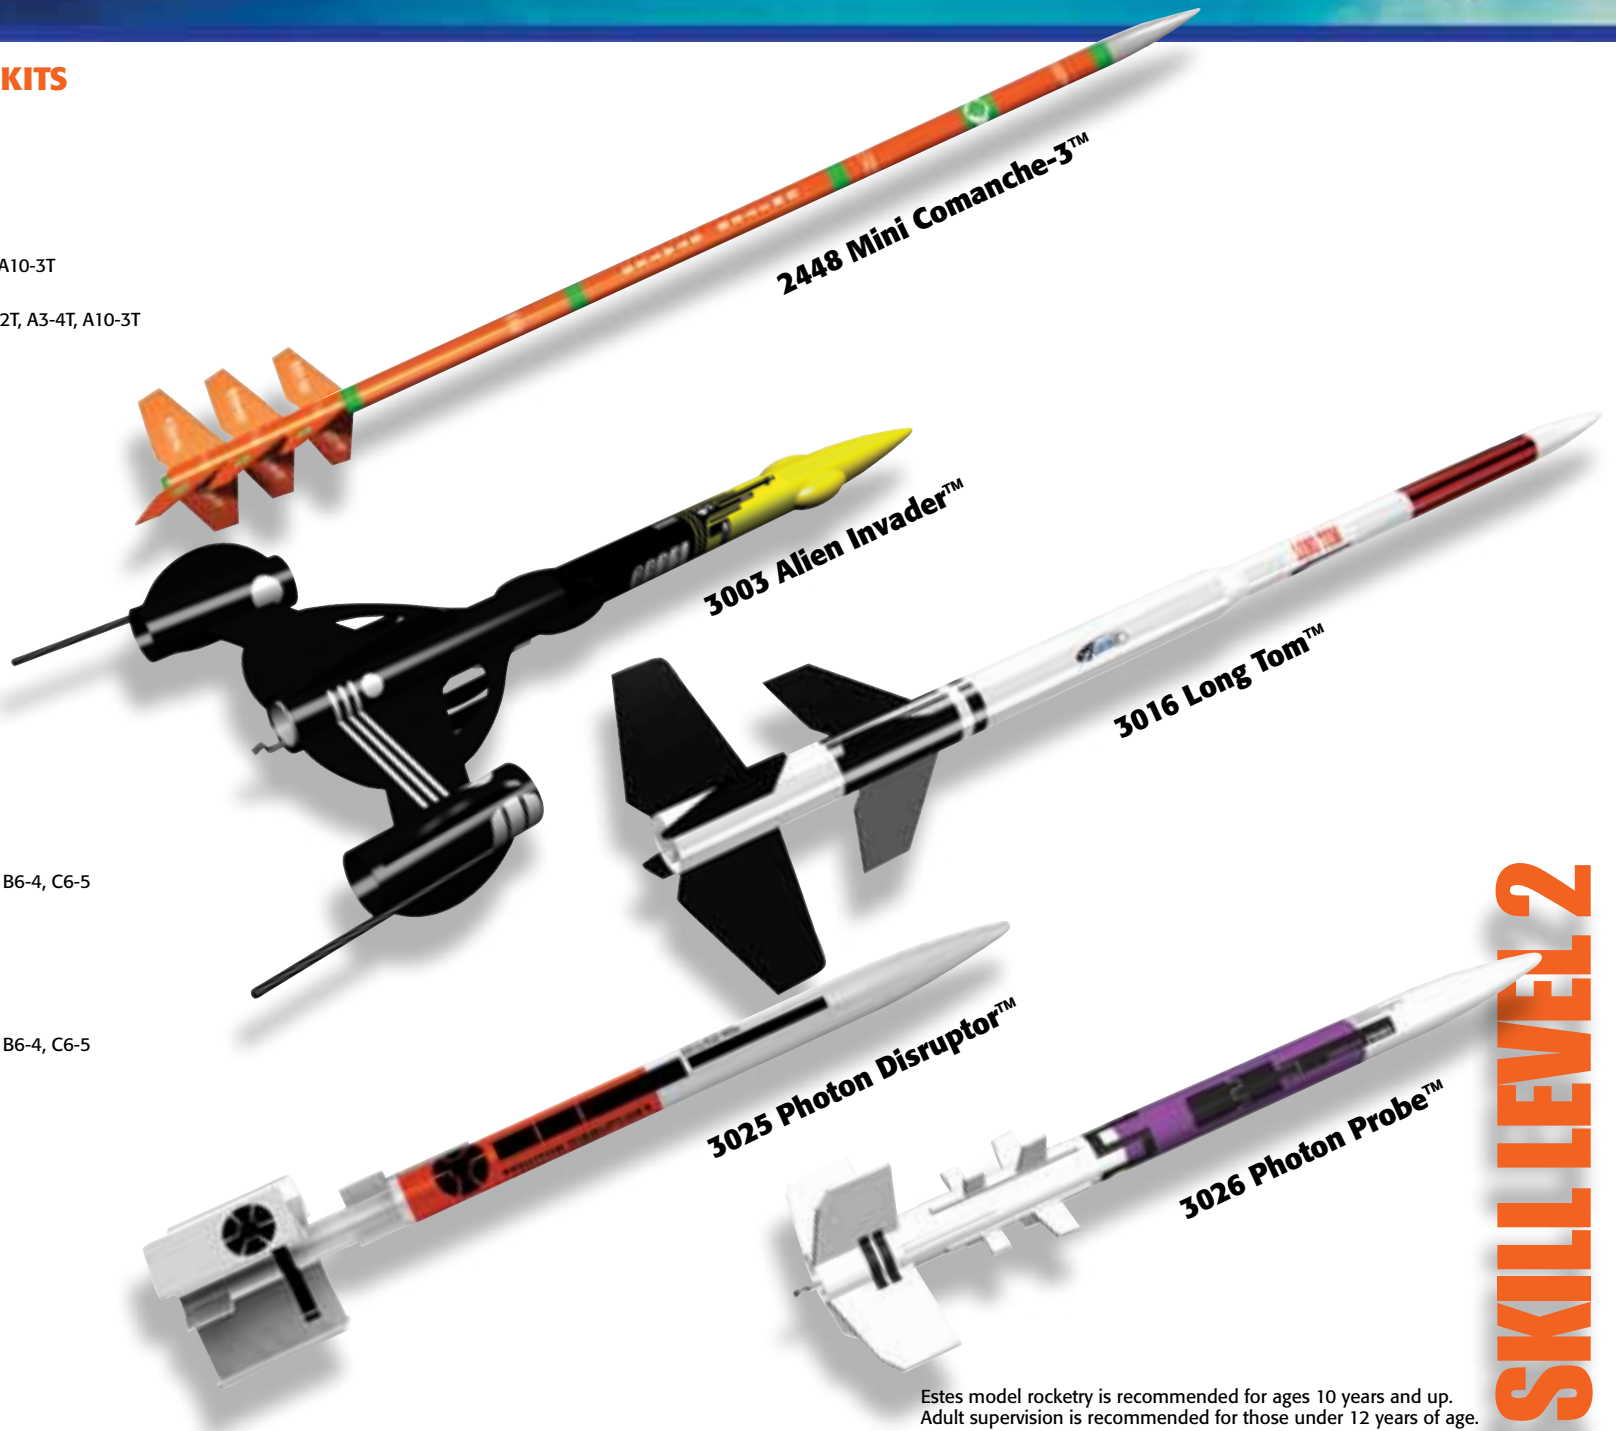

Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 2

SKILL LEVEL 2 ROCKET KITS

3217 Vagabond™

Length: 35.25 in (89.5 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 4.1 oz (116.2 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 1,275 ft (389 m)
 Recommended Engines: D12-5 (First Flight), D12-7, E9-6*, E9-8*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

3218 Laser Lance™

Length: 20.3 in (51.6 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 2.8 oz (79.4 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 925 ft (282 m)
 Recommended Engines: C11-3 (First Flight), C11-5, D12-5, D12-7

3219 Air Commander™

Length: 32.5 in (82.5 cm)
 Diameter: 1.33 in (34 mm)
 Estimated Weight: 3.8 oz (107.7 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 686 ft (209 m)
 Recommended Engines: Booster: Single Stage: C11-3 (First Flight), D12-5, D12-7; Two Stage: Booster: C11-0 (First Flight), D12-0; Upper Stage: C11-5 (First Flight), C11-7, D12-5, D12-7

3225 Solar Warrior™

Length: 27 in (68.6 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 3.1 oz (87.9 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 925 ft (282 m)
 Recommended Engines: C11-3 (First Flight), C11-5, D12-5, D12-7
 Requires 3/16 in (5 mm) Maxi™ Launch Rod (2244), sold separately.

3226 Hi-Flier® XL

Length: 31 in (78.7 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 3.5 oz (99.2 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 1,325 ft (404 m)
 Recommended Engines: C11-3 (First Flight), D12-5, D12-7, E9-6*, E9-8*
 Requires 3/16 in (5 mm) Maxi™ Launch Rod (2244), sold separately.



* E engines require the E™ Launch Controller (2230), sold separately.

Estes model rocketry is recommended for ages 10 years and up.
 Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 2

SKILL LEVEL 2 ROCKET KITS

3227 Loadstar™ II

Length: 23.3 in (59.2 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 2.8 oz (79.4 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 1,000 ft (305 m)
 Recommended Engines: Single Stage: B4-4 (First Flight), B6-4 C6-5
 Two Stage:
 Booster Stage: B6-0 (First Flight), C6-0
 Upper Stage: A8-5 (First Flight), B6-4, B6-6, C6-7



3227 Loadstar™ II

7000 Bull Pup 12D

Length: 15.6 in (39.6 cm)
 Diameter: 1.33 in (34 mm)
 Estimated Weight: 1.8 oz (51 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 675 ft (206 m)
 Recommended Engines: A8-3 (First Flight), B4-4, B6-4, C6-5



7000 Bull Pup 12D

7216 EPM-010™

Length: 35.25 in (89.5 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 2.4 oz (68 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 925 ft (282 m)
 Recommended Engines: B4-4, B6-4 (First Flight), C6-3, C6-5



7216 EPM-010™

7217 Hyper Bat™

Length: 21.9 in (55.6 cm)
 Diameter: .98 in (25 mm)
 Estimated Weight: 1.8 oz (51 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute and Tumble
 Projected Altitude: 2,125 ft (648 m)
 Recommended Engines:
 Single Stage Only: B6-4, (First Flight), B6-6, C6-5, C6-7
 Two Stage: Booster: A8-0, B6-0 (First Flight), C6-0
 Upper Stage: A8-5, B6-6 (First Flight), C6-5, C6-7



7217 Hyper Bat™

7219 Dark Energy™

Length: 29.8 in (75.7 cm)
 Diameter: 1.33 in (34 mm)
 Estimated Weight: 3.8 oz (108 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute
 Projected Altitude: 700 ft (213 m)
 Recommended Engines: B6-2 (First Flight), B4-2, C6-3



7219 Dark Energy™

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 2

SKILL LEVEL 3 ROCKET KITS

2134 MIRV™

Length: 24.5 in (62.2 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 4.7 oz (134 g)
 Fins: Laser cut wood
 Projected Altitude: 600 ft (183 m)
 Recommended Engines:
 Booster Stage: B6-0, (First Flight) C6-0
 Second Stage: A10-3T Only (Requires three A engines and one B or C booster engine per launch.)

2410 Renegade-D™

Length: 26.6 in (67.6 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 4.3 oz (120.9 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 850 ft (260 m)
 Recommended Engine: D12-5
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

2425 Super Neon XL™

Length: 37.75 in (95.9 cm)
 Diameter: 1.64 in (42 mm)
 Estimated Weight: 7 oz (198 g)
 Fins: Laser cut wood
 Recovery: 24 in (61 cm) Parachute
 Projected Altitude: 1,000 ft (305 m)
 Recommended Engines: D12-5 (First Flight), E9-4*, E9-6*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

2440 Magician™

Length: 33.5 in (85 cm)
 Diameter: 1.35 in (34 mm)
 Estimated Weight: 3.5 oz (100 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 1,600 ft (488 m)
 Recommended Engines: D12-5 (First Flight), E9-4*, E9-6*
 Requires 3/16 in (5 mm) Maxi™ launch rod (2244), sold separately.

3222 Tercel™

Length: 16.5 in (41.9 cm)
 Diameter: .54 in (14 mm)
 Wingspan: 10.9 in (27.7 cm)
 Estimated Weight: .78 oz (22.1 g)
 Fins: Laser cut wood
 Recovery: 6 in (15 cm) Parachute and glider
 Projected Altitude: 700 ft (213 m)
 Recommended Engines: 1/2A3-2T (First Flight), A3-4T, A10-3T

3228 V2 Semi-scale Model

Length: 22.4 in (56.9 cm)
 Diameter: 2.6 in (66 mm)
 Estimated Weight: 6.3 oz (178.6 g)
 Fins: Laser cut wood
 Recovery: 18 in (46 cm) Parachute
 Projected Altitude: 725 ft (221 m)
 Recommended Engines: C11-3 (First Flight), D12-3, E9-4*, E9-6*
 Requires 3/16 in (5 mm) Maxi™ Launch Rod (2244), sold separately.

3229 Astron Skydart II™

Length: 15.4 in (39.1 cm)
 Diameter: .98 in (25 mm)
 Wingspan: 12.5 in (31.8 cm)
 Estimated Weight: 3.1 oz (87.9 g)
 Fins: Laser cut wood
 Recovery: 12 in (30.5 cm) Parachute & Glider
 Projected Altitude: 500 ft (152 m)
 Recommended Engines: B6-2 (First Flight), C6-3



* E engines require the E™ Launch Controller (2230), sold separately.

Estes model rocketry is recommended for ages 10 years and up. Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 3
ESTES
ROCKETS

SKILL LEVEL 4 & 5 ROCKET KITS

3221 QCC Explorer™

Skill Level: 4
Length: 35 in (88.9 cm)
Diameter: 1.64 in (42 mm)
Estimated Weight: 5 oz (141.2 g)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 1225 ft (373 m)
Recommended Engines: C11-3 (First Flight),
D12-5, E9-4*, E9-6*
Requires 3/16 in (5 mm) Maxi™ launch rod
(2244), sold separately.



3221 QCC Explorer™

3223 Xarconian Cruiser™


Skill Level: 5
Length: 22.7 in (57.7 cm)
Diameter: 1.33 in (34 mm)
Estimated Weight: 3.7 oz (105 g)
Wing Span: 8.4 in (21.3 cm)
Fins: Laser cut wood
Recovery: 18 in (46 cm) Parachute
Projected Altitude: 525 ft (160 m)
Recommended Engines: B6-2
(First Flight), C6-3



3223 Xarconian Cruiser™

3224 Asteroid Hunter™

Skill Level: 5
Length: 16.2 in (41.1 cm)
Diameter: .98 in (25 mm)
Wingspan: 8 in (20.3 cm)
Estimated Weight: 4.4 oz (124.7 g)
Fins: Laser cut wood
Recovery: Two 12 in (30.5 cm) Parachutes
Projected Altitude: 500 ft (152 m)
Recommended Engine: C6-3

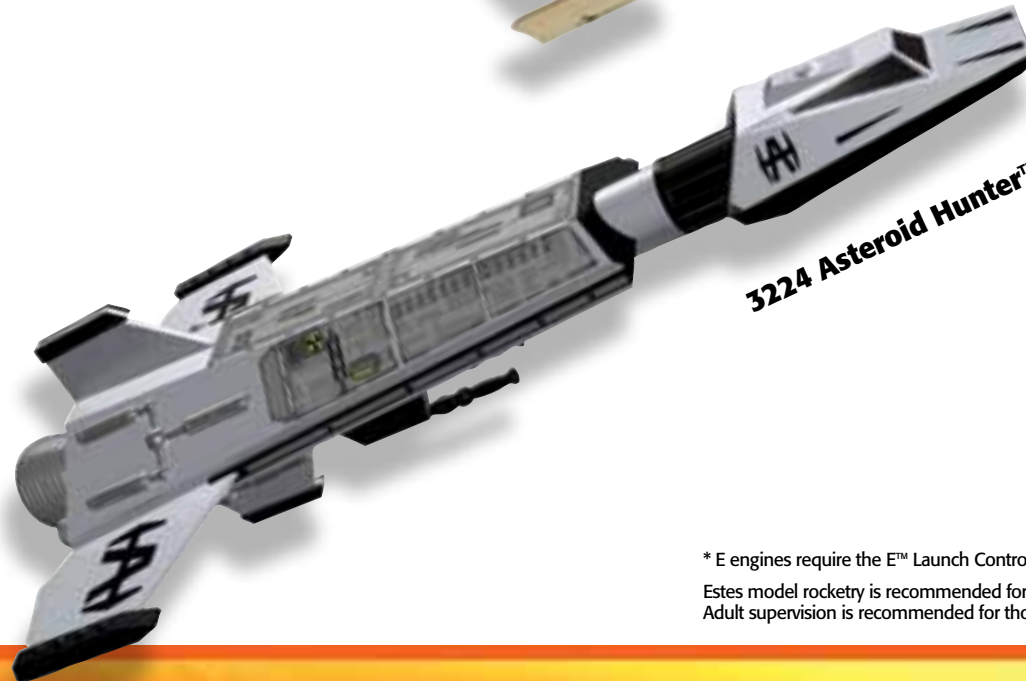

3224 Asteroid Hunter™

* E engines require the E™ Launch Controller (2230), sold separately.


Estes model rocketry is recommended for ages 10 years and up.
Adult supervision is recommended for those under 12 years of age.

SKILL LEVEL 4 & 5

ESTES MODEL ROCKET ENGINES


The famous model rocket engines that made model rocketry the great activity it is today. Estes model rocket engines have been proven consistent and reliable in more than 400,000,000 launches.

- The concept of a factory assembled model rocket engine is the foundation of this scientific and educational activity!
- 2% of all Estes engines are static-tested at the factory for reliability and adherence to performance specifications.
- All engines comply with the code requirements of the National Fire Protection Association and are certified by the National Association of Rocketry.

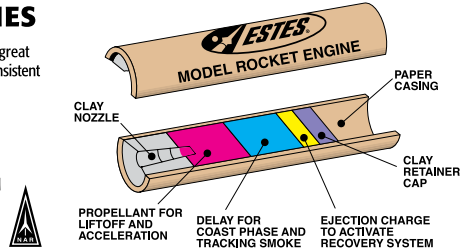

HOW DOES A MODEL ROCKET ENGINE WORK?

- When engine is ignited, it produces thrust and boosts rocket into sky.
- After propellant is used up, delay is activated, producing tracking smoke and allowing rocket to coast.
- After delay, ejection charge is activated, deploying recovery system.

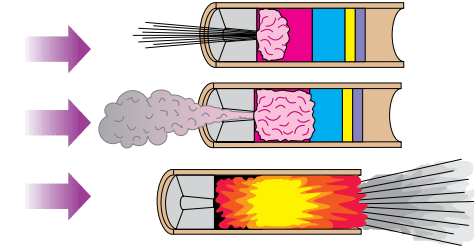





WHAT SIZES ARE AVAILABLE?

Estes engines are available in a wide variety of sizes and power levels:

TYPE	TOTAL IMPULSE	ENGINE TYPES
1/4A	0.313 - 0.625	Mini
1/2A	0.626 - 1.25	Standard, Mini
A	1.26 - 2.50	Standard, Mini
B	2.51 - 5.00	Standard
C6	5.01 - 10.00	Standard
C11	5.01 - 10.00	D Size
D	10.01 - 20.00	D Size
E	20.01 - 30.00	E Size

Each engine type is color coded.

- Single Stage** - Green
- Upper Stage** - Purple (Upper stage engines can be used as single stage engines in lightweight rockets.)
- Booster** - Red (Booster engines contain no delay or ejection charge.)
- Plugged** - Black (Plugged engines are used for R/C gliders and contain no delay or ejection charge.)



Each engine has an alpha-numeric code printed on it.



B = TOTAL IMPULSE

This letter is the total power (in Newton-seconds) produced by the engine. Each succeeding letter has up to twice the total power as the previous letter. (Example: "B" engines have up to twice the power of "A" engines, which results in approximately twice the altitude the rocket will reach.)

6 = AVERAGE THRUST

This number shows the engine's average push or how fast the engine powers the rocket to go. The higher the number, the faster the speed. It is measured in Newtons (4.45 Newtons = 1 lb.).

4 = TIME DELAY

This number gives you the time delay in seconds between the end of the thrust phase and ignition of the ejection charge. Engine types ending in "0" have no time delay or ejection and are used for booster stages and special purposes only. Engines ending in "P" have no time delay or ejection charge and the forward end is plugged.

MODEL ROCKET ENGINE CHART

- Delays have a tolerance of plus or minus 10% or 1 second, whichever is greater.
- All Estes engines come complete with igniters and patented igniter plugs (Pat. No. 5,410,966 and 5,509,354).
- The Estes Igniter Plug makes engine ignition extremely reliable.
- Do not fly a rocket/engine combination whose liftoff weight exceeds the recommended maximum liftoff weight.

Prod. No.	Engine Type	Total Impulse		Time Delay		Max. Lift Wt.		Max. Thrust		Thrust Duration		Initial Weight		Propellant Weight	
		N-sec	Sec.	Oz.	g	Newtons	lbs.	Sec.	Oz.	g	Oz.	g			
SINGLE STAGE ENGINES															
1502	1/4A3-3T*	0.625	3	1.0	28	4.9	1.1	0.25	0.21	5.9	0.46	1.3			
1503	1/2A3-2T*	1.25	2	2.0	57	8.3	1.9	0.3	0.23	6.4	0.07	1.9			
1507	A3-4T*	2.50	4	2.0	57	5.8	1.2	1.0	0.28	8	0.12	3.5			
1511	A10-3T*	2.50	3	3.0	85	13.0	2.9	0.8	0.29	8.1	0.12	3.5			
1593	1/2A6-2	1.25	2	2.0	57	8.9	2.0	0.3	0.48	13.6	0.10	2.7			
1598	A8-3	2.50	3	3.0	85	10.7	2.4	0.5	0.55	15.5	0.14	4.1			
1601	B4-2	5.00	2	4.0	113	13.2	3.0	1.1	0.66	18.6	0.27	7.6			
1602	B4-4	5.00	4	3.5	99	13.2	3.0	1.1	0.68	19.2	0.27	7.6			
1605	B6-2	5.00	2	4.5	127	12.1	2.7	0.8	0.61	17.3	0.23	6.5			
1606	B6-4	5.00	4	4.0	113	12.1	2.7	0.8	0.63	17.8	0.23	6.5			
1613	C6-3	10.00	3	4.0	113	15.3	3.4	1.6	0.83	23.4	0.43	12.2			
1614	C6-5	10.00	5	4.0	113	15.3	3.4	1.6	0.85	24	0.43	12.2			
1622	C11-3	10.00	3	6.0	170	22.1	4.9	0.8	1.13	32.1	0.44	12.4			
1623	C11-5	10.00	5	5.0	142	22.1	4.9	0.8	1.18	33.4	0.44	12.4			
1666	D12-3	20.00	3	14.0	396	32.9	7.4	1.6	1.57	44.5	0.85	24.2			
1667	D12-5	20.00	5	10.0	283	32.9	7.4	1.6	1.61	45.7	0.85	24.2			
1673	E9-4	30.00	4	15.0	425	25.0	5.6	2.8	2.16	61.2	1.30	36.9			
1674	E9-6	30.00	6	12.0	340	25.0	5.6	2.8	2.23	63.2	1.30	36.9			
1692	E12-4	30.00	4.6	17.0	482	30.6	6.9	2.7	2.16	61.2	1.30	36.9			
1693	E12-6	29.50	7	14.0	397	29.6	6.7	2.7	2.23	63.2	1.30	36.9			
UPPER STAGE ENGINES															
1504	1/2A3-4T*	1.25	4	1.0	28	8.3	1.9	0.3	0.23	6.6	0.07	1.9			
1599	A8-5	2.50	5	2.0	57	13.3	3.0	0.5	0.55	15.7	0.14	4.1			
1607	B6-6	5.00	6	2.5	71	12.1	2.7	0.8	0.64	18.2	0.23	6.5			
1615	C6-7	10.00	7	2.5	71	15.3	3.4	1.6	0.85	24.3	0.43	12.2			
1624	C11-7	10.00	7	4.0	113	22.1	4.9	0.8	1.19	33.8	0.44	12.4			
1668	D12-7	20.00	7	8.0	226	32.9	7.4	1.6	1.62	46.0	0.85	24.2			
1675	E9-8	30.00	8	10.0	283	25.0	5.6	2.8	2.24	63.5	1.30	36.9			
1694	E12-8	29.80	8	12.0	340	31.8	7.1	2.7	2.24	63.5	1.30	36.9			
BOOSTER STAGE ENGINES															
1510	A10-0T*	2.50	None	4.0	113	13	2.9	0.8	0.24	6.8	0.12	3.5			
1600	A8-0	2.50	None	3.0	85	13.3	3.0	0.3	0.47	13.5	0.14	4.1			
1608	B6-0	5.00	None	4.0	113	12.1	2.7	0.8	0.55	15.7	0.23	6.5			
1616	C6-0	10.00	None	4.0	113	15.3	3.4	1.6	0.76	21.4	0.43	12.2			
1621	C11-0	10.00	None	6.0	170	22.1	4.9	0.8	1.03	29.2	0.44	12.4			
1665	D12-0	20.00	None	14.0	396	32.9	7.4	1.6	1.43	40.4	0.84	23.8			
1691	E12-0	28.80	None	16.0	454	31.3	7.0	2.6	2.05	58.1	1.30	36.9			
PLUGGED ENGINES - FOR USE WITH ROCKET POWERED RACERS & R/C ROCKET GLIDERS															
1505	A10-PT*	2.50	None	3.0	85	13.0	2.9	0.8	0.26	7.4	0.13	3.78			



The data listed above is from randomly chosen production samples.

NOTE: The "T" designates a mini engine.


* There are 4 mini engines per package. All other engines are 3 per package.

ENGINE TIME/THRUST CURVES

- Time/thrust curves are representative of random production samples
- Graphs are not drawn to the same scale

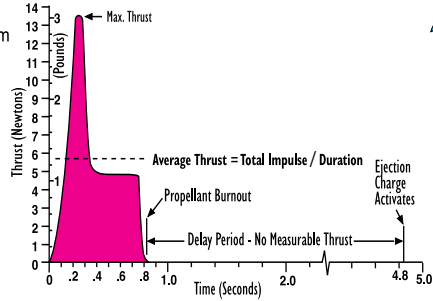

1980 Designer's Special

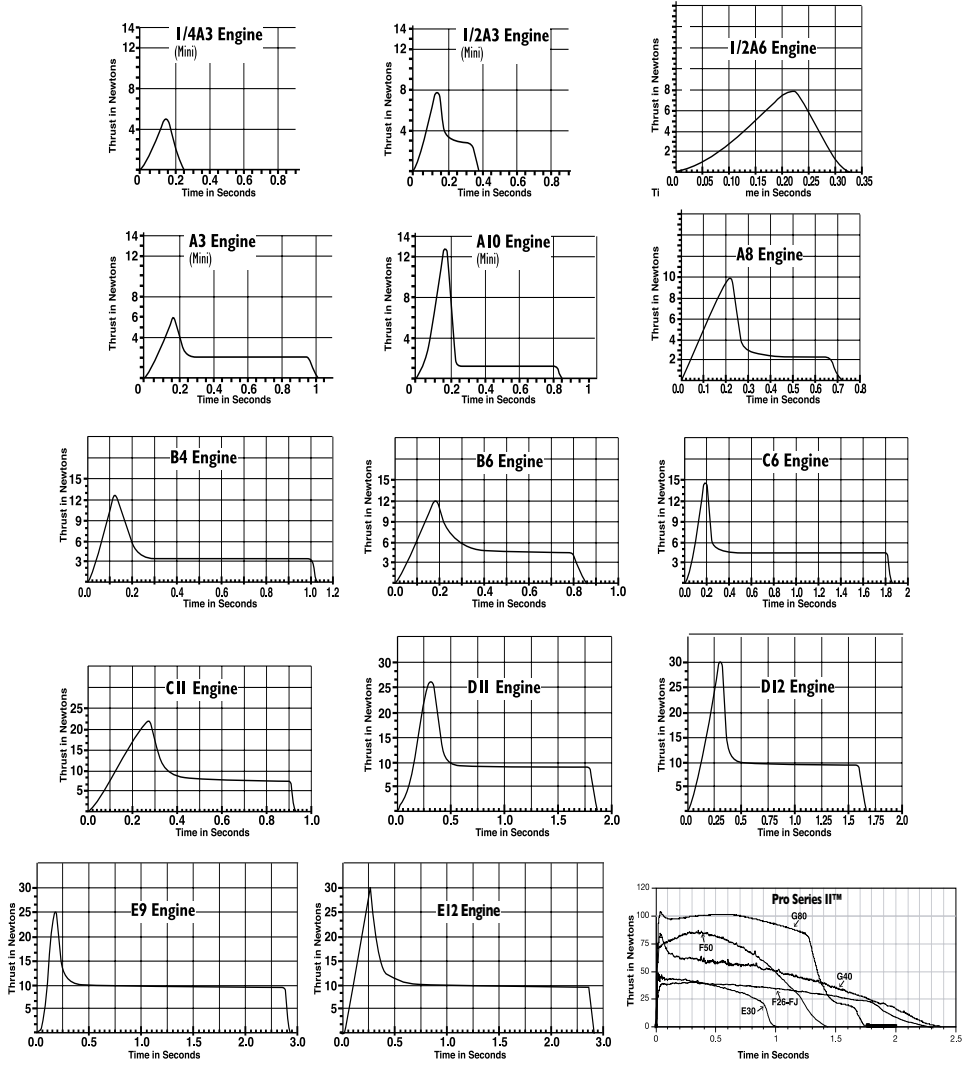

Comes with everything you see here. Build and fly your own designs. 100+ parts to build up to 8 rockets. Turn your imagination into reality. Color of product may vary.

MODEL ROCKET ACCESSORIES



1672 BLAST-OFF® FLIGHT PACK
Includes 6 each of A8-3, B6-4, C6-3, C6-5 engines, 30 igniters and 75 sheets of recovery wadding.

NEW! 2221 Astron II™ LAUNCH CONTROLLER

Comes assembled with safety key and 15 ft (5 m) of cable. Requires 1 9V battery - not included.

NEW! 2225 Astron II™ LAUNCH PAD AND CONTROLLER

Quick assembly - no glue or tools required! Comes complete with blast deflector, standoff, two-piece 1/8 in (3 mm) launch rod and safety cap. Controller comes with 15 ft (5 m) of cable. Requires 1 9V battery - not included.

NEW! 2239 Astron II™ LAUNCH PAD

Quick assembly - no glue or tools required! Comes complete with blast deflector, standoff, two-piece 1/8 in (3 mm) launch rod and safety cap.

2215 PORTA-PAD® II LAUNCH PAD

Quick assembly - no glue or tools required! Comes complete with blast deflector, standoff, two-piece 1/8 in (3 mm) launch rod and safety cap. Can accommodate a 3/16 in (5 mm) Maxi™ launch rod - not included.

2220 ELECTRON BEAM® LAUNCH CONTROLLER

Launch controller comes assembled with safety key and 15 ft (4.6 m) of cable. Requires four AA alkaline batteries - not included.





2230 E™ LAUNCH CONTROLLER

Comes assembled with safety key and 30 ft (9 m) of cable. Requires 4 AA alkaline batteries - not included. Adult supervision is required for anyone under 18 when launching E engine powered rockets.

2238 PORTA-PAD® E LAUNCH PAD

Quick assembly - no glue or tools required. Includes a 1/4 in (6 mm) launch rod, but can accommodate a 3/16 in (5 mm) Maxi™ launch rod - not included. Adult supervision required for anyone under 18 when launching E engine powered rockets.

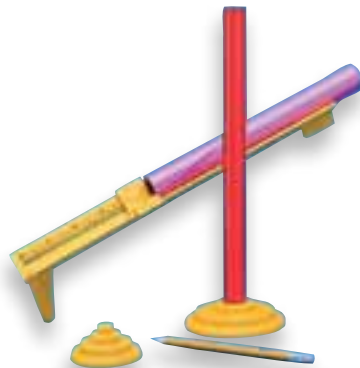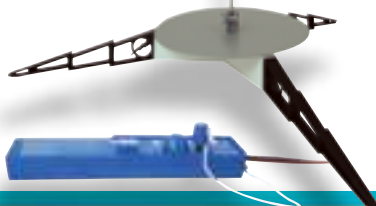

302227 TUBE MARKING GUIDE

Easy way to mark fin and launch lug placement lines. Also includes a fin gluing jig. Body tube not included.



2228 ULTIMATE TUBE MARKING GUIDE
Marks body tube for accurate fin placement.




2231 FIN ALIGNMENT GUIDE

Fast and accurate fin alignment for three- or four-finned rockets.



2232 ALITRAK™
Measure altitude with this easy to use device. Follow the rocket in the sights to apogee, release the trigger to lock the reading.



302241 BLAST DEFLECTOR PLATE
Replaces that worn-out deflector.

2243 1/8 in (3 mm) TWO-PIECE LAUNCH ROD

Replacement rod ideal for most rockets.

2244 3/16 in (5 mm) TWO-PIECE MAXI™ LAUNCH ROD

Launch rod with extra strength and length for larger rockets.


2262 6 in (15.2 cm) PARACHUTE (Assembled)

2264 12 in (30.5 cm) PARACHUTE (Assembled)

NEW! 2265 15 in (38 cm) PARACHUTE (Assembled)

2267 18 in (46 cm) PARACHUTE (Assembled)

2271 24 in (61 cm) PARACHUTE (Assembled)

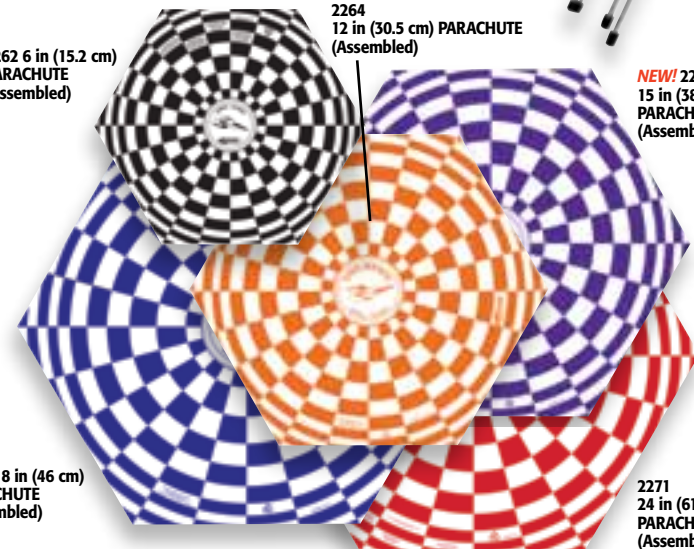

ACCESSORIES


MODEL ROCKET ACCESSORIES




2274 RECOVERY WADDING
Flame resistant wadding protects recovery system. Required in most Estes rockets. Contains 75 sheets – enough for about 18-25 flights!



2278 SHOCK CORDS & MOUNT PACK
Contains two 1/8 in x 18 in (3 mm x 450 mm) and one 1/4 in x 36 in (6 mm x 910 mm) rubber shock cords (enough for four shock cords). Includes mounts and instructions.




2301 MODEL ROCKET IGNITERS
Dependable, easy-to-use Estes igniters in a convenient six pack. It's always a good idea to have a few spares.



2320 LAUNCH LUG PACK
Contains eight 1/8 in (3 mm), four 3/16 in (5 mm) and two 1/4 in (6 mm) launch lugs.



2315 TUBE CUTTING GUIDES
Assorted sizes: BT-5, BT-20, BT-50, BT-55, and BT-60 (hobby knife not included)

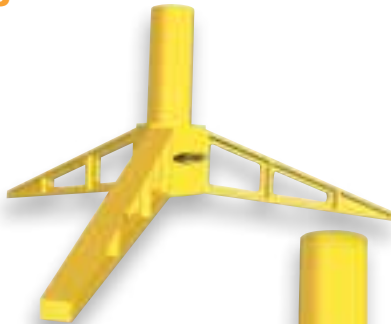

NEW! 2290 ROCKET DISPLAY STAND
For mini engine rockets (3 pack)



NEW! 2291 ROCKET DISPLAY STAND
For standard engine rockets (3 pack)


NEW! 2292 ROCKET DISPLAY STAND
For C11, D and E engine rockets (3 pack)



2316 MINI TO STANDARD ENGINE ADAPTERS
Two simple steps transform a mini engine into a standard size. Insert a mini engine into the adapter, and insert the adapter into a rocket. 3 adapters per pack. Reusable.



2317 STANDARD TO D ENGINE ADAPTERS
Two simple steps transform a standard engine into a D size. Insert a standard engine into the adapter, and insert the adapter into a rocket. 3 adapters per pack. Reusable.



303143 ENGINE HOOK ACCESSORY PACK
Hooks fit mini engines (one), regular and D engines (three) and E engines (two). Includes spacer for E engine hooks.



303159 D AND E ENGINE MOUNT KIT
Heavy duty engine mounts for D and E engines. Fits BT-55, 60 and 80 tubes.

NOSE CONE ASSORTMENTS

Each package of nose cones contains a variety of shapes. Some are one piece, others two piece. All have eyelets for shock cord and shroud line attachments.

303160 NC-5 NOSE CONE ASSORTMENT (5 pack)

303161 NC-20 NOSE CONE ASSORTMENT (4 pack)

NEW! 3162 NC-50 NOSE CONE ASSORTMENT (5 pack)

303163 NC-55 NOSE CONE ASSORTMENT (4 pack)

303164 NC-56 NOSE CONE ASSORTMENT (4 pack)


303165 NC-60A NOSE CONE ASSORTMENT (4 pack)

303168 NC-80B NOSE CONE (1 pack)

NEW! 3173 SCI-FI NOSE CONE ASSORTMENT (5 pack)



3158 REGULAR ENGINE MOUNT KIT
Fits BT-50, 55 and 60 tubes. Can also be used to make a conversion mount for lightweight D powered rockets.



303196 Large Tube Coupler Pack
Includes two couplers for BT-55, BT-56 and BT-60; One for BT-80.



NEW ASSORTMENT!
3162



NEW! 3173

BODY TUBES

High quality spiral wound paper tubes. Use tube couplers to connect tubes of the same diameter. Four tubes per package with BT-5 & BT-20, three per package with BT-50, BT-55 and BT-60 and two per package in BT-80.

Product Number	Body Tube Size	Inside Dimension in./mm	Outside Dimension in./mm	Length in./cm
303084	BT-5	.52/13	.54/14	18.0/45.7
303085	BT-20	.71/18	.74/19	18.0/45.7
303086	BT-50	.95/24	.98/25	18.0/45.7
303087	BT-55	1.28/33	1.33/34	18.0/45.7
303089	BT-60	1.60/41	1.64/42	18.0/45.7
303090	BT-80	2.56/65	2.60/66	14.2/36.1

Contents and specifications subject to change without notice.

ACCESSORIES



GET YOUNG PEOPLE EXCITED ABOUT LEARNING!

Inspiring students and young people – that’s what Estes Educator is here to do! Just log onto EstesEducator.com to find everything you need for your classroom or youth organization. We’ve made it easy to bring the fun of model rockets to your students.



- Free lesson plans
- Automated list of items needed
- Links to funding and grants
- Extensive resource materials
- Special Discount Bulk Packs

Estes Makes it EASY!

“Estes model rockets are the best hands-on activity I have ever done with my students!”

FREE LESSON PLANS ONLINE

Use the handy pull-down menus to:

- Choose a grade level
- Choose a subject
- Choose the number of classroom sessions

The perfectly matched lesson plan will be displayed!



All matched to National Learning Standards

AUTOMATED LIST OF ITEMS NEEDED

After choosing a lesson plan, just enter the number of students and our website will automatically display a list of recommended rockets and accessories. We’ve removed the guesswork and determined the best, most budget-friendly choices for you.

LINKS TO FUNDING

We’ve located a number of organizations that support teaching with model rockets. From EstesEducator.com, you can link directly to funding opportunities to get the application process started. Many are easy to request and you can expect a response quickly.

EXTENSIVE RESOURCES ONLINE

In addition to free lesson plans, we have many resources available and easily accessed. At EstesEducator.com you can find useful information about:

- How to Choose a Launch Site
- The Basics of Model Rocketry
- Reference Guide for Teachers and Youth Group Leaders
- Worksheets for the Classroom
- Videos, Curricula and much more



ESTES EDUCATOR™



SPECIAL BULK PACKS FOR EDUCATORS

Estes offers 12- and 24-piece discount Bulk Packs especially for educators and youth group leaders. Bulk Packs are available for a variety of rockets, including E2X® Easy To Assemble Rockets and Skill Level 1 and 2 Rocket Kits. (Rocket Engines, Recovery Wadding, Igniters and Igniter Plugs are sold separately.)

E2X® EASY TO ASSEMBLE BULK PACK ROCKETS

E2X Kits can be assembled in about one hour. Simply glue the parts together according to the instructions, apply decals and attach the parachute. They require no special tools or painting.



1750 Gnome™ (24-pack)
Length: 10.3 in (26.2 cm)
Recommended Engines:
1/2A3-2T (First Flight),
1/2A3-4T, A3-4T, A10-3T

1751 Alpha® III (12-pack)
Length: 12.3 in (31.2 cm)
Recommended Engines:
1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7

1764 Generic E2X® (12-pack)
Length: 15 in (38.1 cm)
Recommended Engines:
1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7


1792 Firestreak SST™ (24-pack)
Length: 10.2 in (25.9 cm)
Quick Snap – No gluing!
Recommended Engines:
1/2A3-2T (First Flight),
1/2A3-4T, A3-4T, A10-3T



1793 UP Aerospace™ SpaceLoft™ (12-pack)
Length: 11.1 in (28.2 cm)
Recommended Engines:
1/2A3-2T (First Flight),
1/2A3-4T, A3-4T, A10-3T

1753 AVG BULK PACK


(12-pack) 4 of each rocket

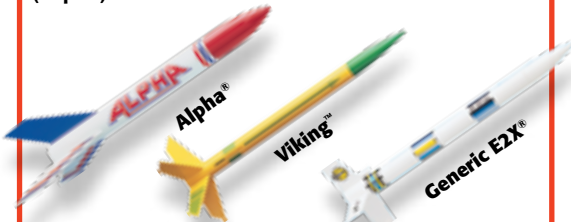

Recommended Engines:
1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7

SKILL LEVEL 1 & 2 BULK PACK ROCKET KITS

Skill Level 1 & 2 Rocket Kits require more model building and decorating. Most can be built in less than two hours and require fins to be assembled and some painting.

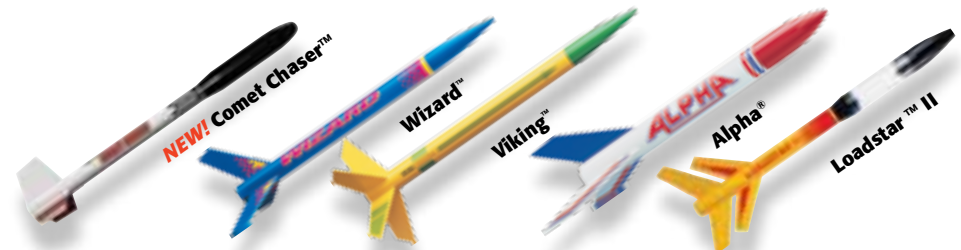

1722 Comet Chaser™ (12-pack)
Skill Level 1
Length: 14.4 in (36.5 cm)
Recommended Engines: A8-3, (First Flight), B6-4, C6-5, C6-7

1754 Wizard™ (12-pack)
Skill Level 1
Length: 12 in (30.5 cm)
Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7

1755 Viking™ (12-pack)
Skill Level 1
Length: 12.1 in (30.7 cm)
Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7

1756 Alpha® (12-pack)
Skill Level 1
Length: 12.3 in (31.2 cm)
Recommended Engines: 1/2A6-2, A8-3 (First Flight), A8-5, B4-4, B6-4, B6-6, C6-5, C6-7

1760 Loadstar™ II (12-pack)
Skill Level 2
Length: 23.3 in (59.2 cm)
Recommended Engines: Single Stage: B4-4 (First Flight), B6-4 C6-5; Two Stage: Booster Stage: B6-0 (First Flight), C6-0; Upper Stage: A8-5 (First Flight), B6-4, B6-6, C6-7

ROCKET ENGINE BULK PACKS

Every launch requires Engines, Recovery Wadding, Igniters and Igniter Plugs. These convenient Engine Bulk Packs include enough of each for 24 launches. Choose from a variety of engine sizes. We advise using the smallest recommended engine for first flights.



1781 A8-3 Engines (24)
1783 B6-4 Engines (24)
1784 B6-0/B6-6 Engines (12 each)
1788 1/2 A3-4T Engines (24)
1789 C6-5 Engines (24)
1672 Blast-Off Variety Flight Pack (6 each of A8-3, B6-4, C6-3 & C6-5)

LAUNCH EQUIPMENT

For first time flights you'll need launch equipment, which can be re-used launch after launch. We recommend choosing a Launch Set, as shown on pages 6-7 and 32-37 of this catalog. With each Launch Set you get the Launch Controller, Launch Pad, plus a rocket for the teacher.

USEFUL CLASSROOM TOOLS

302227	Tube Marking Guide	2232	AltTrak™ Altitude Finder
2228	Ultimate Tube Marking Guide	2315	Tube Cutting Guides
302231	Fin Alignment Guide	2290-2292	NEW! Model Rocket Display Stands



ESTES ALTIMETER

2246



- Memory storage for up to 10 consecutive flights
- A sophisticated electronic payload accurately measures model rocket launch altitudes from 0-9,999 feet (0-3000 m)
- 4 Digit LCD read out displays English or metric units
- Includes replaceable alkaline battery