



CLEARMIRROR®



THE DIFFERENCE IS CLEAR

# 12"X12" SHOWER CLEARMIRROR

16104-121224M

## SPECIFICATIONS


- Tolerance:  $\pm 0.0625''$
- Mirror must mount flush with tile or surround.
- UL Listed for use in showers.
- Transformer located in remote/accessible area.
- Electrical: 24Volt/18Watts.

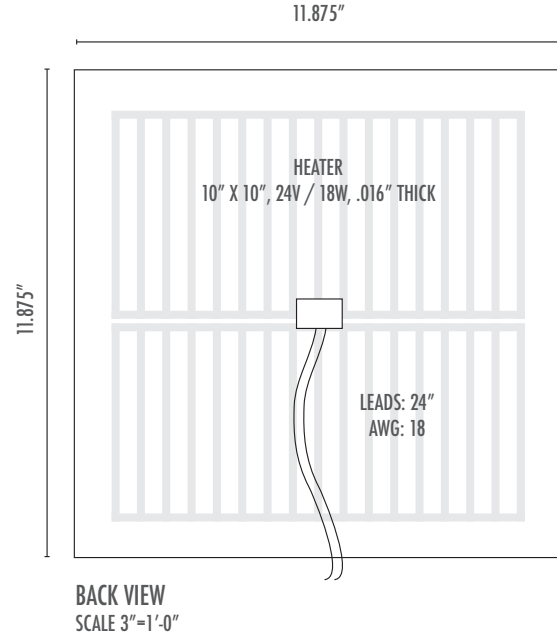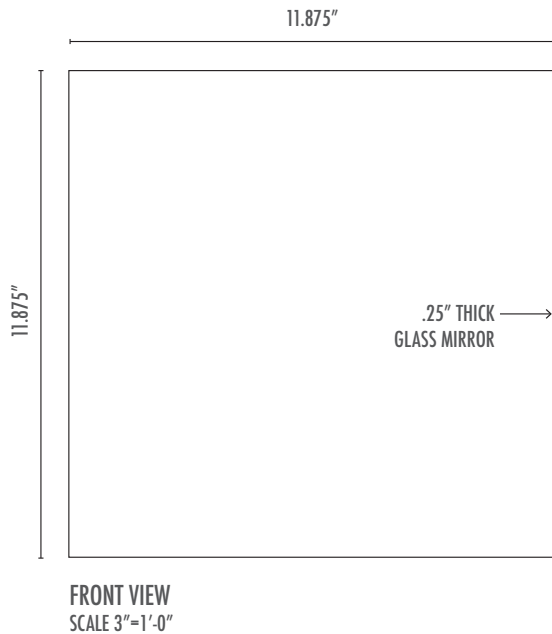

## MGT-2420 CLASS II POWER SUPPLY

24VAC 20VA Class II Power Supply

- Input voltage: 120VAC 60Hz
- Rate current: 830mA
- Output voltage: AC 24 V +/- 5%
- No load voltage: AC 28.5VMax
- Exciting current (I<sub>o</sub>): 70mA Max. at input 120VAC 60Hz without secondary load.
- Insulation test: 500VDC 100MΩ Min. between input plug and output terminal and case.
- AC blade pull test: Pull AC blades by 35lb for one minute without pull out from the case.
- Temperature rise: Input 120VAC 60Hz with secondary load 2400mA, shall not exceed 40deg on case surface (By them 10meter) 72deg for primary winding (By resistance method). At ambient temp. 25°C
- Normal operating temperature at: -10°C ~ +40°C
- Storage temperature at: -20°C ~ +70°C
- Normal operating humidity at: 30% — 85% R.H.
- Net Weight (APPROX.): 1lb.

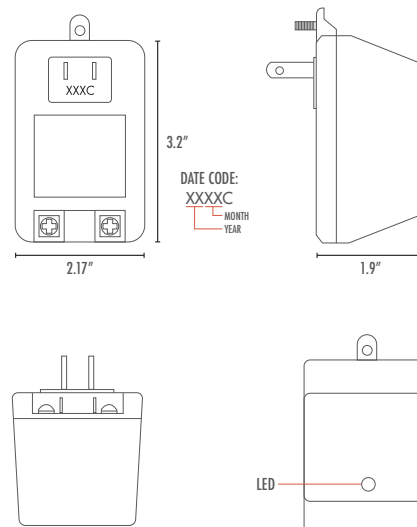

COLOR	WHITE
MATERIAL	ABS
UNIT	IN