

LINC

The Linc collection traces its contemporary inspiration to the oldest and simplest spanning technique of beam and support. Bold parallel lines are finished in brushed nickel or chrome, adding to its modern flair. All fixtures come with the latest integrated, long life energy saving LED technology.




A.



B.

These fixtures can be mounted up or down and vertically

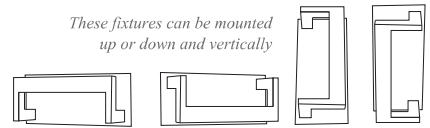

C.



Color Temperature - **3000K**
CRI (Color Rendering Index) **>90**
Dimmable Light Source
Replaceable Components



D.



E.

	Product	Bulbs/Wattage	Source Lumens	CCT	CRI	L/ext.	W	H	Wall Plate Size
A	1925-15-BN-LED	7.5W-LED	600L	3000K	>90	4"	11 3/4"	5 1/8"	11 3/4" x 5 1/8"
B	1925-20V-BN-LED	15W-LED	1200L	3000K	>90	4"	19 7/8"	5 1/8"	19 7/8" x 5 1/8"
C	1925-26V-BN-LED	19W-LED	1600L	3000K	>90	4"	26"	5 1/8"	26" x 5 1/8"
D	1925-37V-BN-LED	28.5W-LED	2400L	3000K	>90	4"	37"	5 1/8"	37" x 5 1/8"
E	1925-48V-BN-LED	38W-LED	3200L	3000K	>90	4"	48"	5 1/8"	48" x 5 1/8"




F.



G.


These fixtures can be mounted up or down and vertically

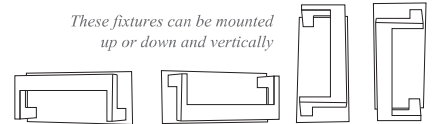


H.



Color Temperature - **3000K**
CRI (Color Rendering Index) >**90**
Dimmable Light Source
Replaceable Components

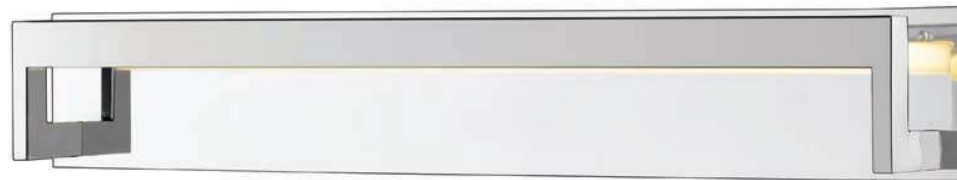

I.

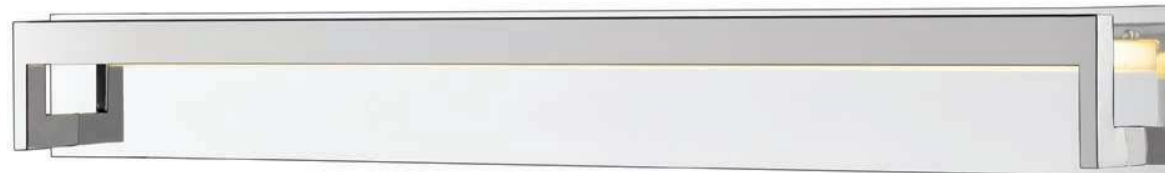

J.

	Product	Bulbs/Wattage	Source Lumens	CCT	CRI	L/ext.	W	H	Wall Plate Size
F	1925-1S-CH-LED	7.5W-LED	600L	3000K	>90	4"	11 3/4"	5 1/8"	11 3/4" x 5 1/8"
G	1925-20V-CH-LED	15W-LED	1200L	3000K	>90	4"	19 7/8"	5 1/8"	19 7/8" x 5 1/8"
H	1925-26V-CH-LED	19W-LED	1600L	3000K	>90	4"	26"	5 1/8"	26" x 5 1/8"
I	1925-37V-CH-LED	28.5W-LED	2400L	3000K	>90	4"	37"	5 1/8"	37" x 5 1/8"
J	1925-48V-CH-LED	38W-LED	3200L	3000K	>90	4"	48"	5 1/8"	48" x 5 1/8"