

**Actual Size:** 32" x 40" x 40" • (81.3cm x 101.6cm x 101.6cm)

**Shipping Size:** 35" x 43" x 43" • (88.9cm x 109.22cm x 109.22cm)

**Net Weight:** 200lbs • (90.8kg)

**Shipping Weight:** 280lbs • (127kg)

**Seat Width:** 23" • (58.42cm)

**Unoccupied Water Capacity:** 70gal • (265L)

**Occupied Water Capacity:** 25-55gal • (94.6 - 208.2L)

## Included Features (Soaking)

1. Acrylic shell gloss white finish fiberglass gelcoat reinforced
2. Stainless steel frame with adjustable leveling legs
3. Plastic composite and tempered glass outward swing door with 3 latch gear & shaft mechanism
4. Two (2) Access Side Panels
7. Single 2" 2-port PVC drains with 1 end caps included, 2 overflows, 2 stainless steel operated openers with extended handles in chrome finish

## Jetting & Therapy Options

1. Air + Hydro (LED Chromatherapy Light Not Included)
3. Hydro Massage + Microbubble (LED Chromatherapy Light Not Included)
4. Hydro Massage (LED Chromatherapy Light Not Included)
5. Soaking



## Jetting & Therapy Systems

### Hydro Massage

- Hydro Massage Pump 7A
- Intensity Dial Air Control
- Ozone Sterilization 0.04A
- 13 jets (11 Seat Jets 2 Calf Jets)
- On/Off Push Control
- In-line Water Heater 6A 650W

### Microbubble Therapy

- 1 HP Pump 7.3A
- Pressure Vessel
- On/Off push control
- Agitator Valve

### Air Massage

- Air Massage Pump 4.5A 500W
- 3 Speed Pump
- Auto-purge (Activates 20 minutes after pump shutdown)
- 16 jets (10 Seat Jets 6 Foot Jets)
- On/Off push control

### Optional Features

1. Heated Seat and Backrest
2. Digital Controller

### 2 Piece Faucet

- Up to 16GPM @ 60PSI (at ideal in-home plumbing conditions)
- Two 5' Water Supply Lines 3/4"
- Pull out Hand Shower in Chrome Finish with a 5' Retractable Stainless Steel Braided Hose


### Electrical Requirements

Dedicated GFCI protected electrical line(s) required 110/120V 60Hz


**Disclaimer\*:** AMP value for each pump may change based on availability. Please verify before purchase. (800.480.6850)


### Warranty

- Lifetime limited\* warranty on shell, frame, door, and parts to original purchaser/Address
- Labor or installation is not covered - please refer to the Ella warranty certificate
- Non Ella brand faucets covered under manufacturers original warranty

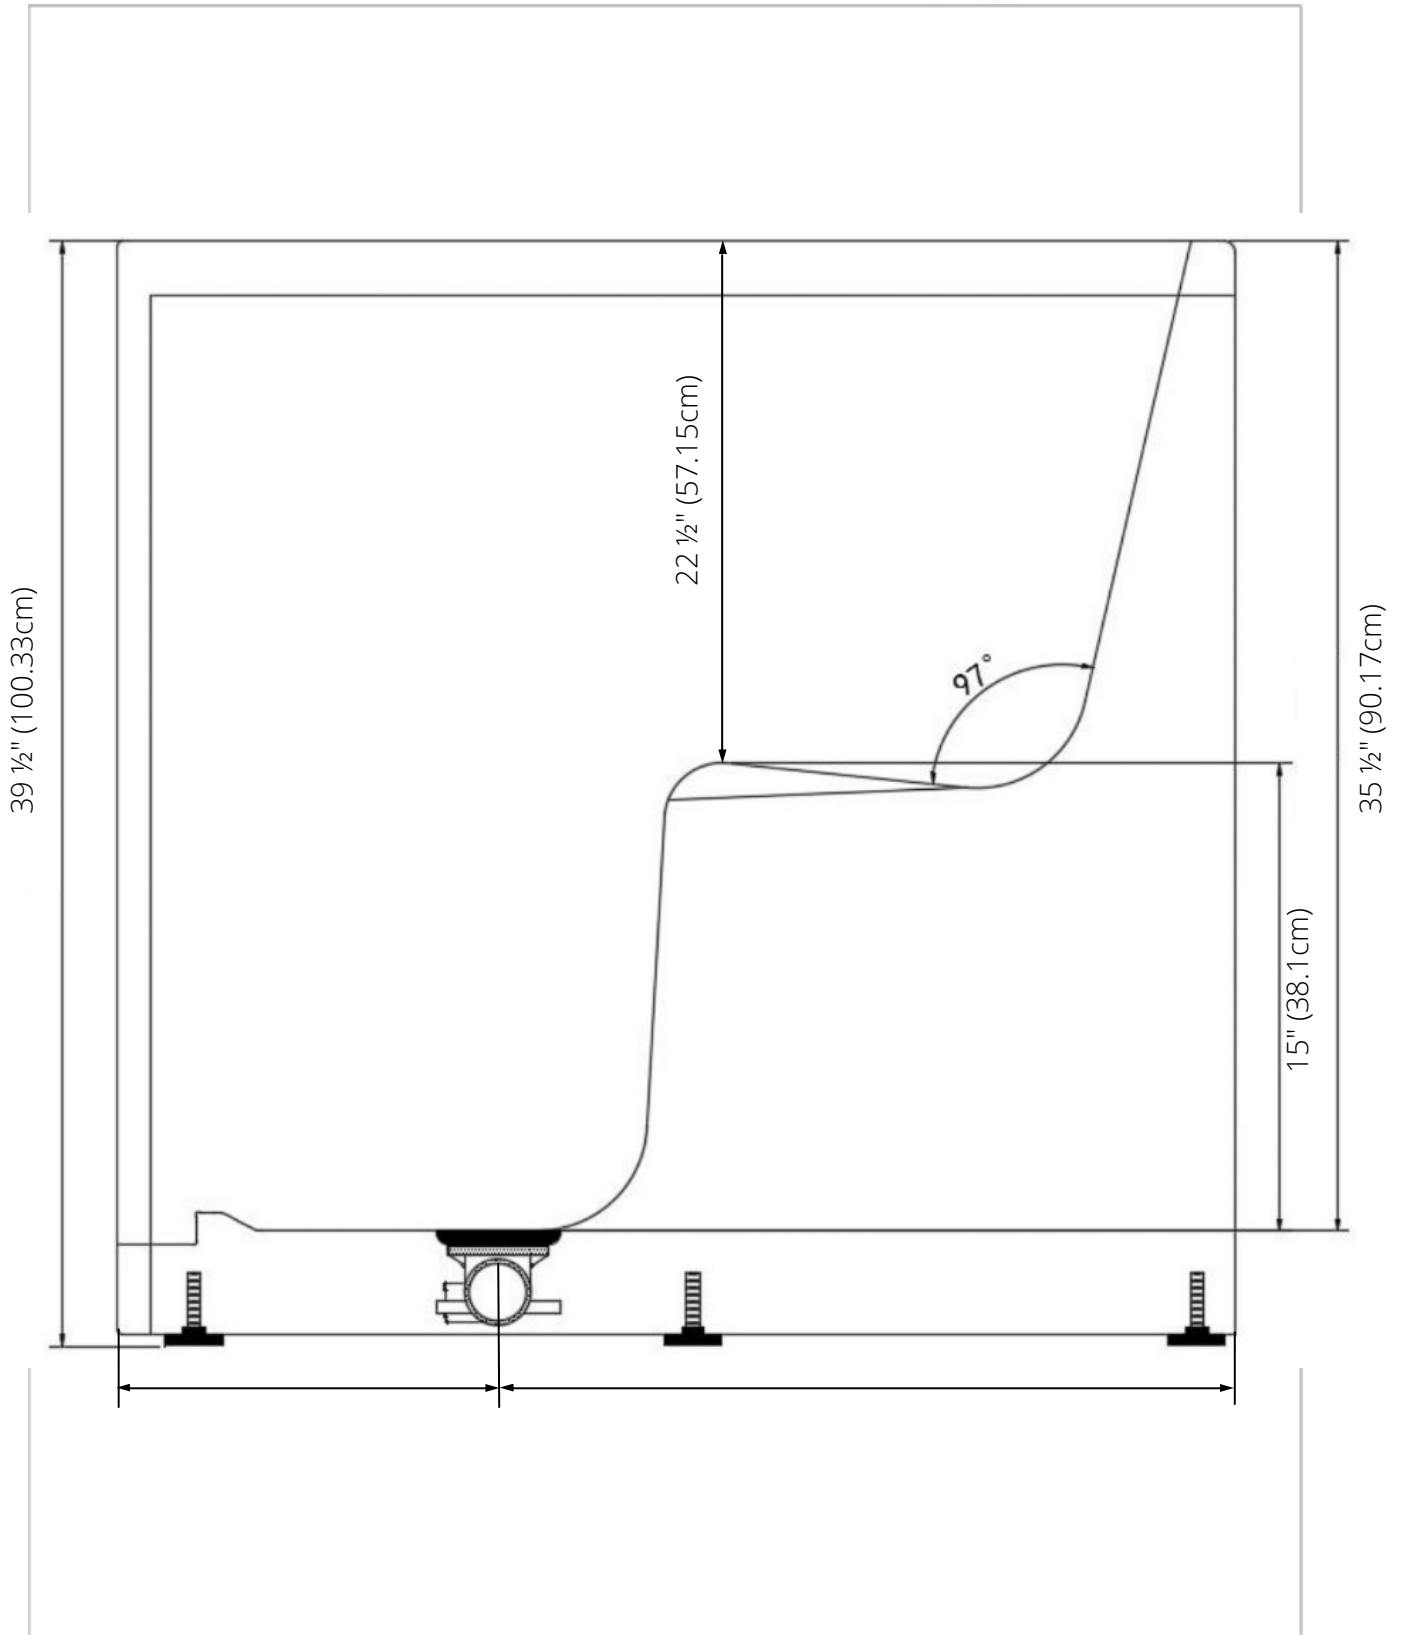

# Front Entry Acrylic Outward Swing Door Walk-In Bathtub Specifications

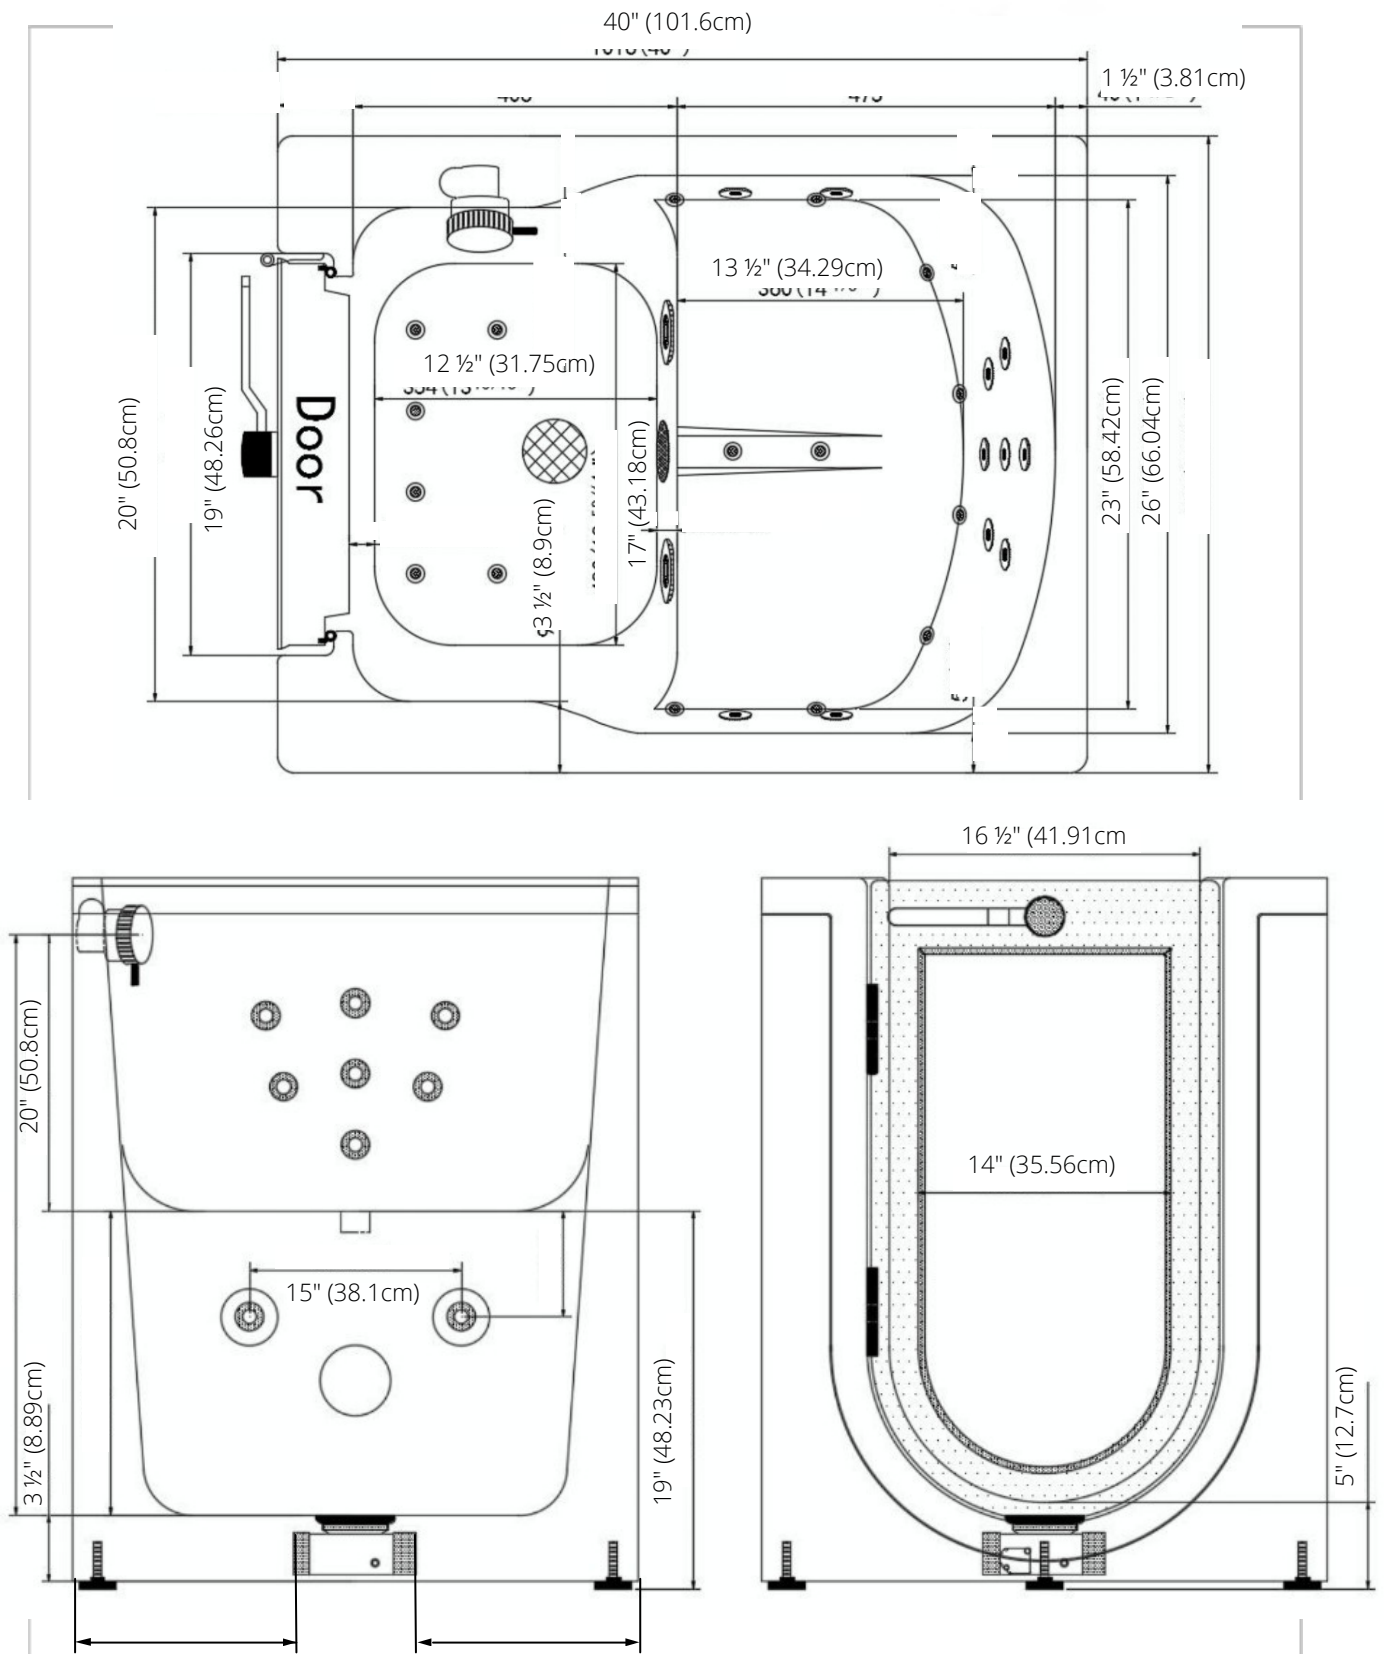

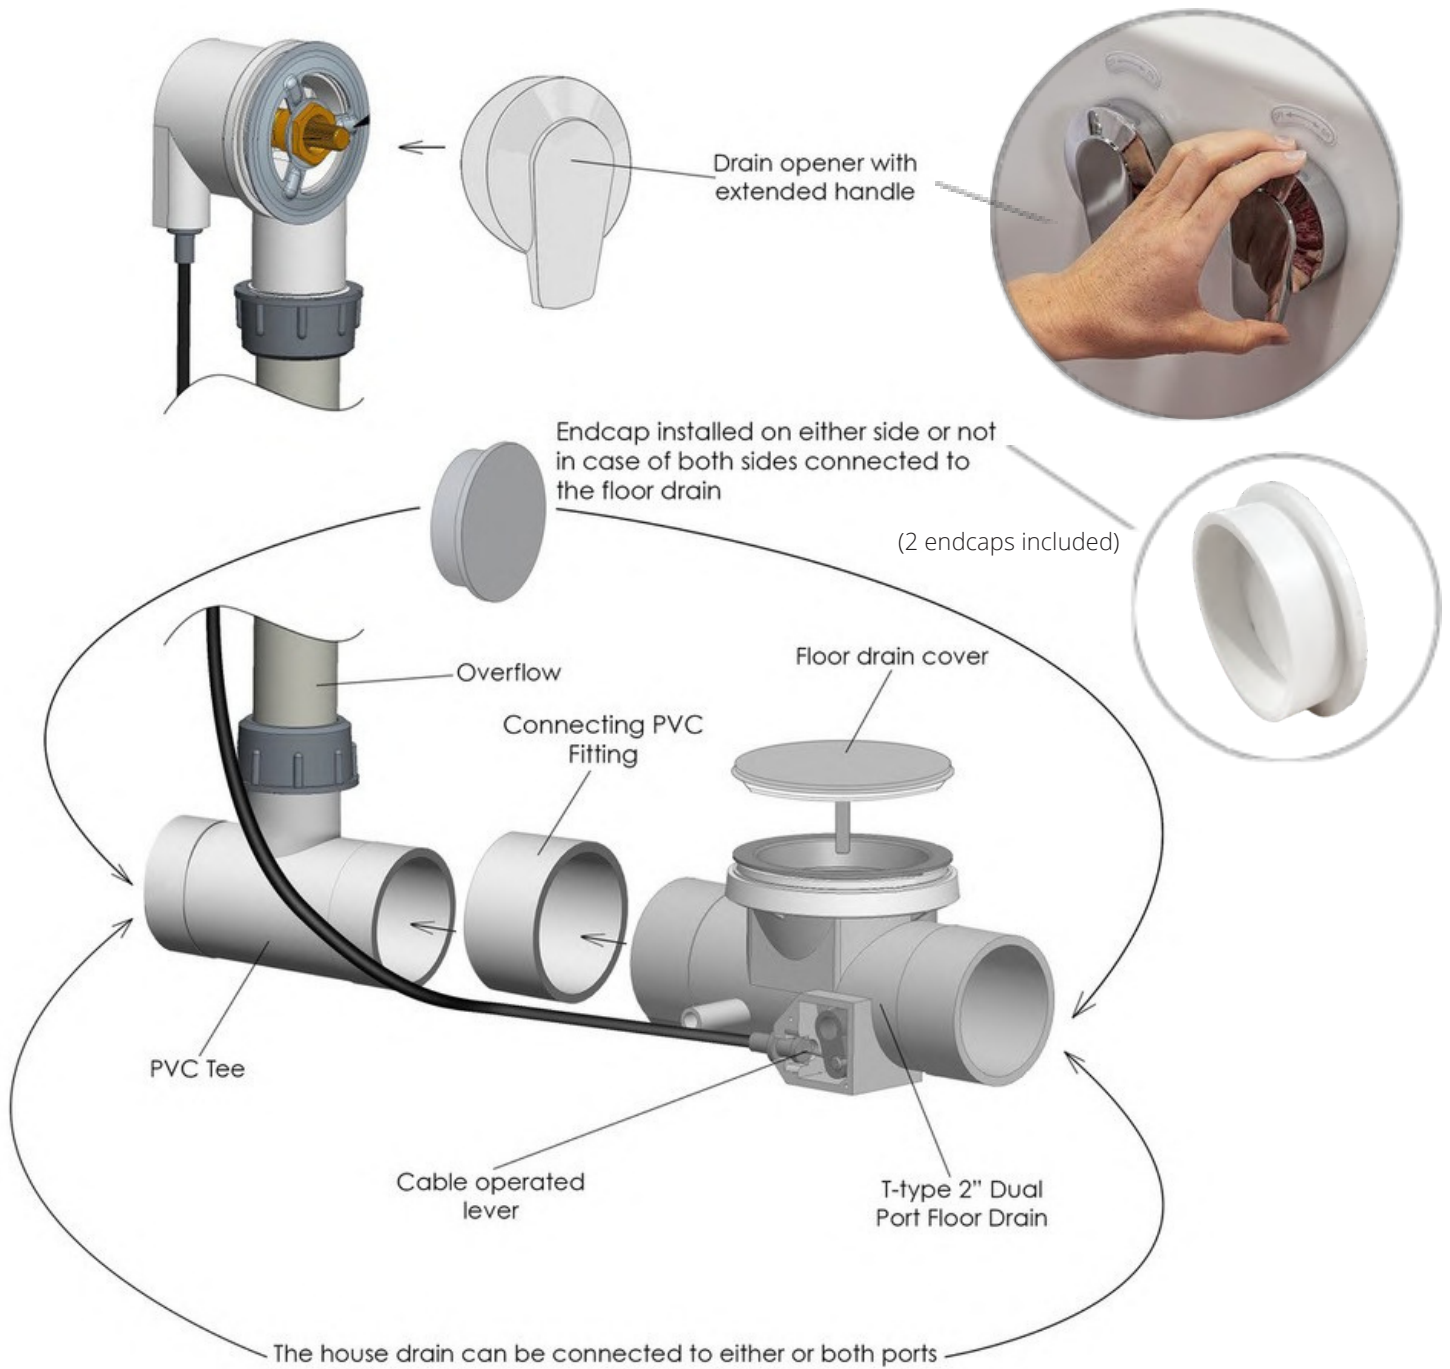




Two 3/4" connector water supply lines included with Ella Fast Fill Faucets



Connect to Shut Off Valves (not included)

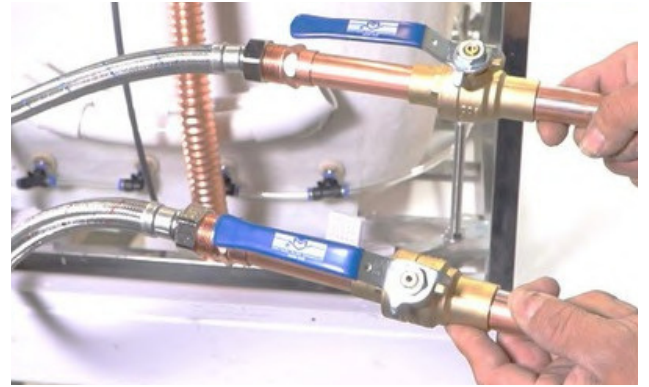

All electrical fixtures connect to a dedicated GFCI protected outlet.




Use a drain cap to close unused drain port.



T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.

Images below show examples of PVC pipe connections (not included). Reducers can be used to connect smaller drain pipes.

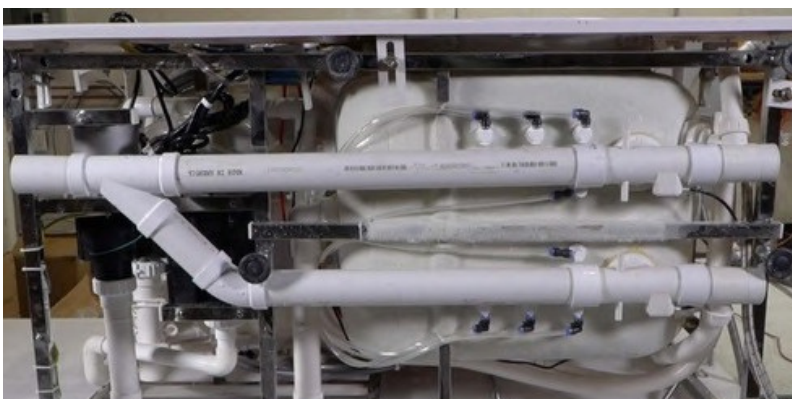

**Description**

Solid brass spout chrome finish single lever high flow bathtub faucet with diverter button Two (2) 3/4" 5' braided stainless-steel supply lines Pull out hand shower mixer with 5 settings and 5' braided hose in a Chrome or Brushed Nickel finish.

**Flow**

- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 16 GPM (68.1L/min)

**Cartridge**


- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

**Standards**

- Third party certified to meet: CSA B125.1, ASMEA112.18.1, ICC117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever/handle
- IAPMO R&T UPC certified

Hot and Cold ON/OFF Lever

Brushed Nickel Finish

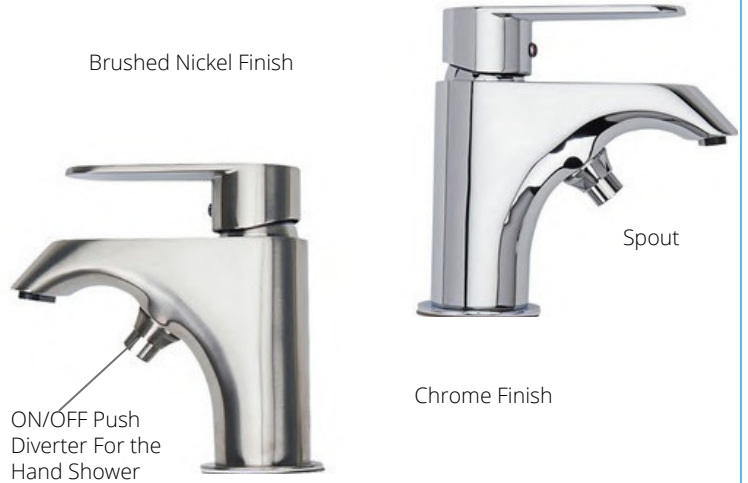

Chrome Finish

NOTE: This faucet is designed to be installed through: 2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, and a 7/8" diagonal hole for the hand shower.

