


ACRYLIC PLUNGE

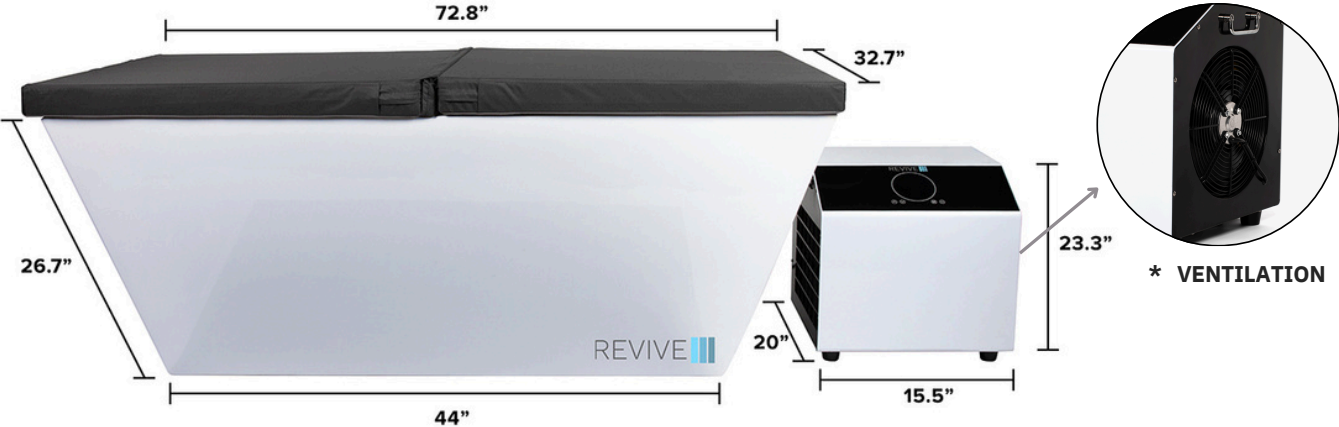

Operating System	Plunge Features	Plunge Construction	Technical Specification
<ul style="list-style-type: none">• Powerful 1hp chiller cools and heats quickly for residential or commercial use• Controlled temp cools to 32°F or heats to 107°F• Engage ice-making mode at 32°F• Dual filtration consisting of a 20 micron cartridge filter and a metal mesh pre-filter• Built-in ozone generator for water sanitization	<ul style="list-style-type: none">• Control your plunge settings and schedule remotely via smart control technology• Color changing LED tub light• Made for indoor or outdoor use	<ul style="list-style-type: none">• Fully insulated fiberglass construction with acrylic finish and insulated spa cover• Product weight<ul style="list-style-type: none">• Tub: 180 lbs• Chiller: 100 lbs• Total weight: 280 lbs• Maximum capacity<ul style="list-style-type: none">• Water: 140 gallons• Total weight: 1,348 lbs• Recommended capacity<ul style="list-style-type: none">• Water: 110 gallons• Total weight: 1,097 lbs	<ul style="list-style-type: none">• Power requirements<ul style="list-style-type: none">• Dedicated 120V/15amp circuit• Power draw<ul style="list-style-type: none">• Compressor on: 1350W• Compressor off: 121W* Ventilation requirement<ul style="list-style-type: none">• Maintain a 24" clearance in front of the fan indicated in the graphic above• No plumbing required