





# GENUINE SPLASH GUARD (REAR)

## INSTALLATION AND USER'S INSTRUCTIONS

Thank you for purchasing a genuine Mazda accessory.  
Before removal and installation, be sure to thoroughly read these instructions.  
Please read the contents of this booklet in order to properly install and use the mud flap.  
Your safety depends on it.  
Keep these instructions with your vehicle records for future reference.

### **WARNING**

- There are several  **WARNING** and  **CAUTION** sections in this booklet concerning safety when installing or removing the Splash Guard. Always read and follow them in order to prevent injuries, accidents, and possible splash guard damage to the vehicle.
-  **WARNING:** Indicates a situation in which serious injury or death could result if the warning is ignored.
-  **CAUTION:** Indicates a situation in which bodily injury or damage to the vehicle could result if the caution is ignored.
- For areas indicating the tightening torque in this instruction manual, tighten to the specified torque using a torque wrench. For areas in which the tightening torque is indicated inside parentheses (), the tightening torque is indicated as a reference value, however tightening using a torque wrench is not necessary.
- Do not modify the splash guard (rear).
- Do not install the splash guard (rear) in any way other than described in the following instructions.
- If there is any doubt, please ask your Mazda dealer to install the accessory in order to prevent errors in installation.
- If you have any questions about the use of the accessory, ask your Mazda dealer for proper advice before using it.
- Mazda and its suppliers are not responsible for injuries, accidents, and damage to person and property that arise from the failure of the dealer or installer to follow these instructions.
- To ensure safety and reliability of the work, installation, removal and disposal work must be carried out by Authorized Mazda Dealership.
- Be careful not to lose removed parts, and be sure that they are kept free from scratches, grease or other dirt.

**PART NAME:** Splash Guard Rear (LH/RH)

**VEHICLE:** CX-9

**PART NUMBER:** 0000-8H-N29      0000-89-N29

#### NOTE

##### To the dealer


- Please turn over these instructions to the customer after installation.

##### To the customer

- Keep these instructions after installation. The instructions may be necessary for installing other optional parts or removal of this accessory.
- Should the vehicle or this accessory be resold, always leave these instructions with it for the next owner.

KBKD45V3460X10



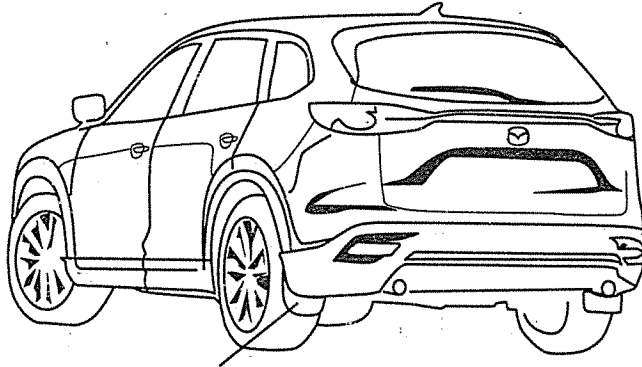


## 1. INSTALLATION VIEW



Splash Guards (Rear)

## 2. PARTS

- Before installation, verify that the kit includes all the following parts and that they are free of dirt, scratches, or damage.

<b>A</b>	<b>(LH)</b>		x1	Splash Guard Rear (LH)
<b>B</b>	<b>(RH)</b>		x1	Splash Guard Rear (RH)
<b>C</b>			x4	U-nut Clip x 4
<b>D</b>			x4	M5 Bolt x 4
<b>E</b>			x2	Pull Rivet x 2

### 3. BEFORE INSTALLATION

#### ■ REQUIRED TOOLS

- Screwdriver (Phillips)
- Spanner
- Nipper



#### ⚠ WARNING

- Park the vehicle on a flat, level surface, set the selector level to P (AT vehicles), apply the parking brake and block the wheels so that the vehicle does not move during installation.

#### ⚠ CAUTION

Use the most appropriate (size, use) tool for each task and perform the work correctly.

Place the removed parts and kit accessories on a protective sheet to prevent scratches.

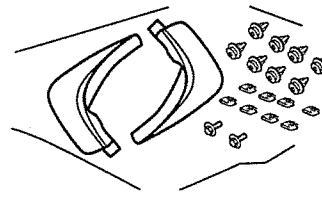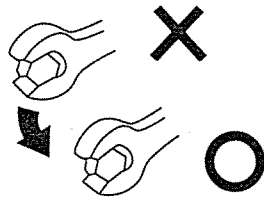

#### NOTE

- Refer to the applicable Workshop Manual for removal and installation of vehicle parts. Not following the procedures for removal / installation in the Workshop Manual could result in an accident or vehicle malfunction.

#### ⚠ CAUTION


- The splash guard (rear) is made of hard plastic. Handle it with care, as it may be deformed or discolored if it contacts solvents such as thinner or comes close to flame.

#### 4. INSTALLATION OF THE SPLASH GUARD (REAR)


- The figure shows the left side, however, perform the same procedure for the right side.

1. Remove the (2) pull rivets and (1) bolt from the splash shield as shown in the figure.


NOTE: The removed pull rivets and bolts are to be reused. Be careful not to damage or lose them.

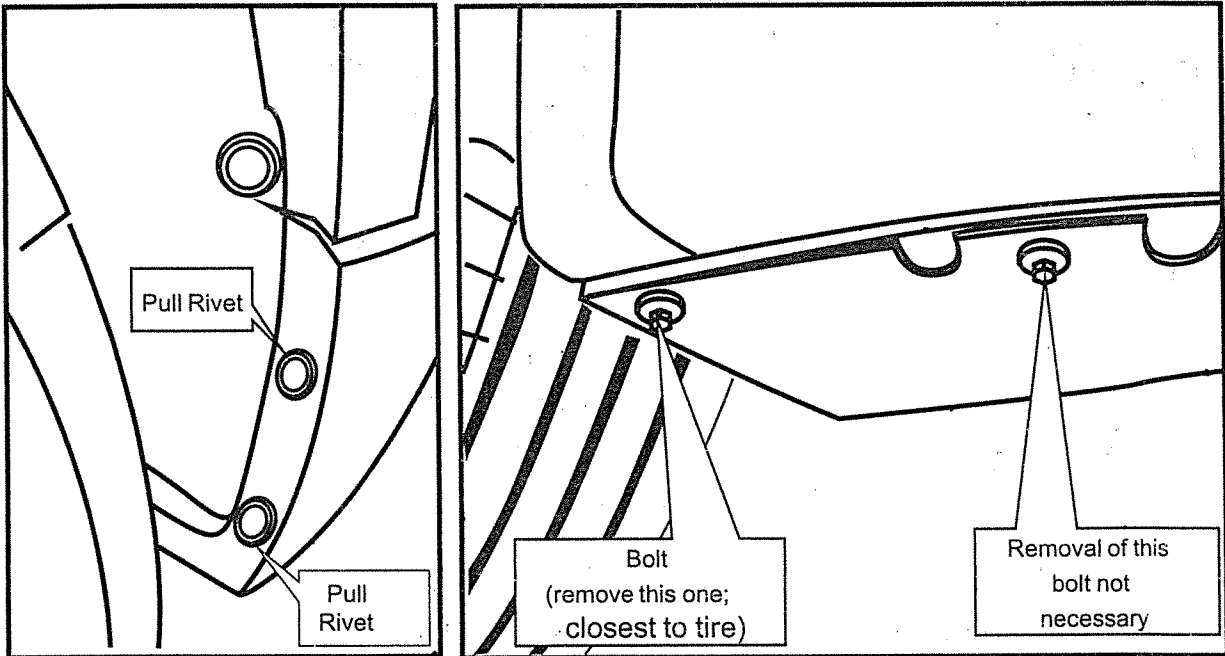



2. Cut out the dashed locations shown in the figure with a nipper along the scribed lines on the backside of the splash shield

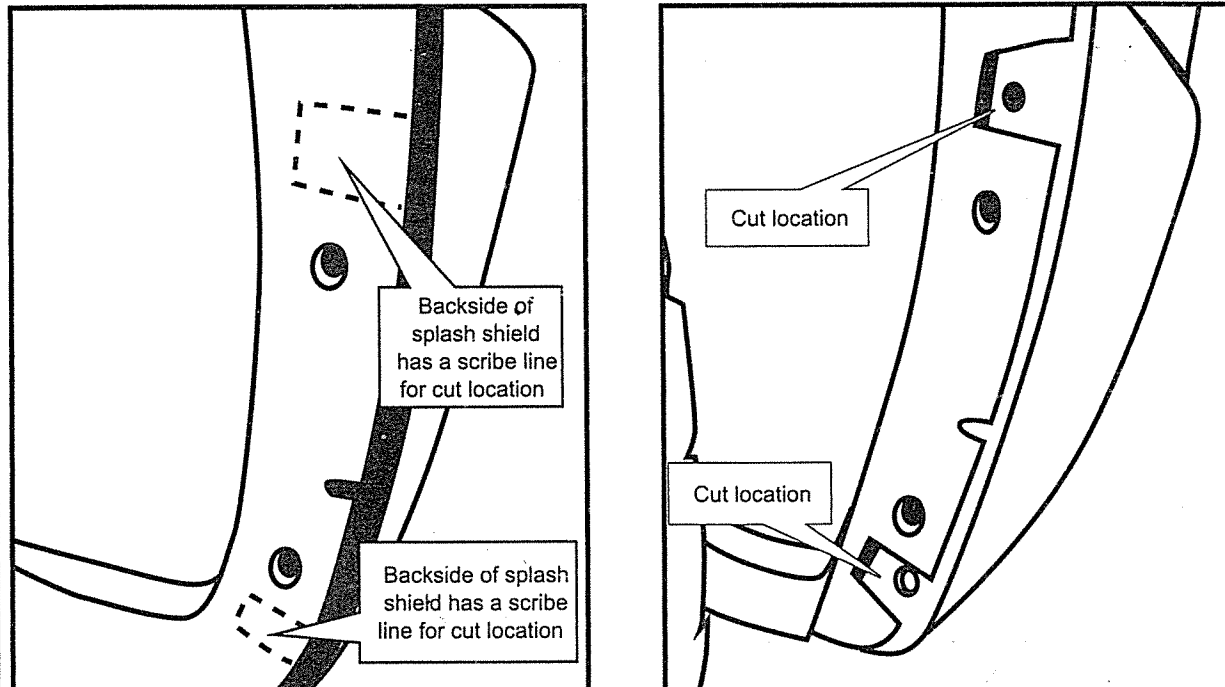

3. Install (2) clip nuts to the fender liner and original (2) pull-rivets

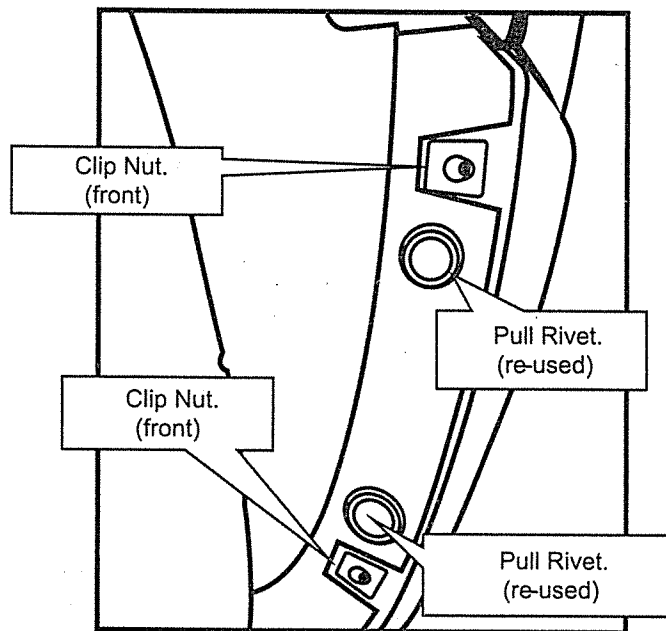

4. Install the splash guard to the rear bumper and loosely install the (2) kit bolts and (1) pull rivet. Press the splash guard to the over fender installation area to ensure there are no gaps.  
 5. Pull the flag from the double-sided tape, and press part securely to vehicle. Apply sufficient pressure to the double-sided tape from the exterior side of the splash guard. Push in pull rivet

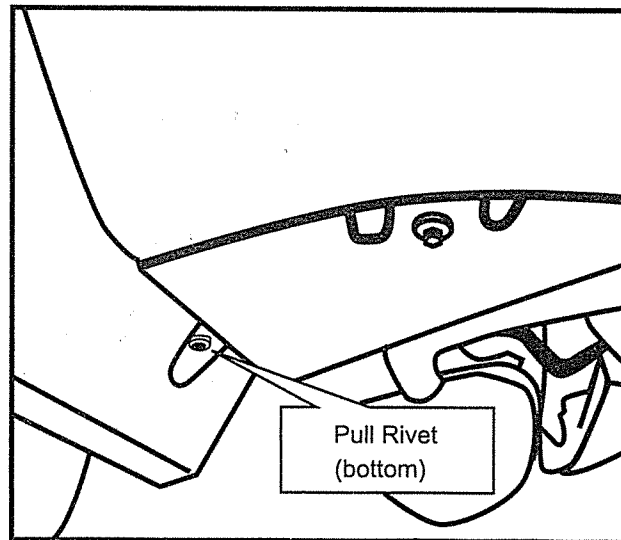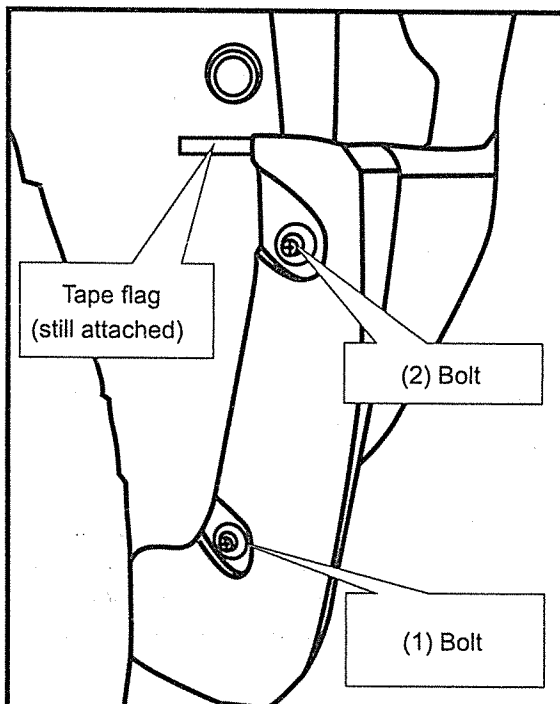

( Tightening torque  
 Bolt: 0.8 - 1.2 N•m {8.2 - 12.2 kgf•cm•7.1 - 10.6 in•lbf} )

Advice

- Install the bolts so that there are no gaps between the mud flap (rear) and rear bumper (over fender).

## 5. CONFIRMATION AFTER INSTALLATION

1. Be sure that there are no excessive gaps.

- Be sure that there are no excessive gaps. If there are any gaps, loosen all the bolts and then retighten them in the order of top, and bottom while pressing the splash guard (rear) against the vehicle.

2. Be sure that all bolts are securely tightened.

## 6. MUD FLAP (REAR) PRECAUTIONS

### CAUTION

- If gasoline, engine coolant, or battery fluid adheres to the painted surface of the resin parts, it will cause discoloration, stains, or paint peeling. Wipe it off with a soft cloth immediately.
- Don't drive through an automatic car wash for 24 hours; it may damage the splash guard (rear).
- Do not use car polish containing wax compounds. Otherwise, the surface could be damaged.
- If the vehicle height is lowered due to the vehicle being at maximum passenger or cargo capacity, decrease the vehicle speed when parking on a road shoulder or entering/leaving a road shoulder or bump. Otherwise, the splash guard (rear) could be damaged.

# INSTALLATION INSPECTION SHEET

**CX-9**

**SPLASH GUARD (REAR)**

SEE COVER SHEET FOR P/N

## Inspection after installation

- Inspect the installed / reinstalled parts for the following items.

Inspection Parts	Check Item (O)				
	Clearance/Fit	Scratches / Dirt	Installation / Engagement	Fastener, bolt tightening	Tape Attachment
Splash Guard (Rear)	o	o	o	o	o
Over fender	o	o	o	o	o

Installation inspection sheet for Splash Guard (Rear)

Date					
VIN					
Approved		Checked		Person in charge	

The term of validity for this sheet: 36 months