




SAFETY INSTRUCTIONS

- ⓘ Please read the instructions carefully before using.
- ⓘ Do not disassemble or refit the products.
- ⓘ Press touch sensor button properly.
- ⓘ Do not place the product in wet environment in case of reduction of battery life.
- ⓘ Keep the mirror dry; moisture reduces the sensitivity of the product.
- ⓘ Turn off the power before cleaning. The surface of the mirror should be cleaned with glass cleaner; please make sure the mirror is completely dry before using.
- ⓘ Turn off the power and avoid direct sunlight if not used or stored for a long time. Far away from children's access.
- ⓘ Make sure that your charging device is adequate for the mirror voltage rating before using.
- ⓘ Do not approach or put the product into the fire in case of fire or explosion.
- ⓘ Stop using it immediately if abnormal condition occurs.


* We reserve the right of any modification of the product involving design and specification, all the materials here are for your reference only and are subject to the products you received. No further notice will be given for any technical parameters changed.

WALL-MOUNTED LED BATHROOM MIRROR

OPERATION MANUAL

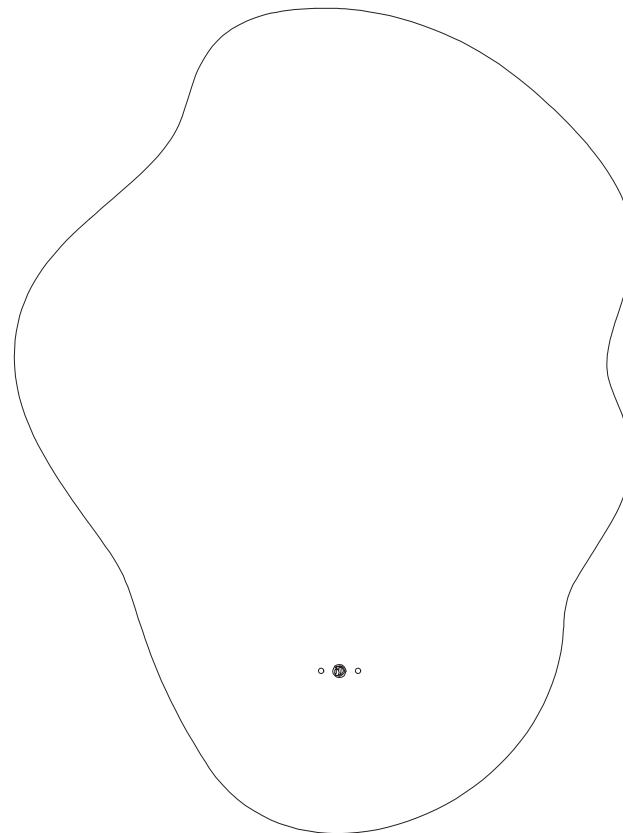

ILLUSTRATE

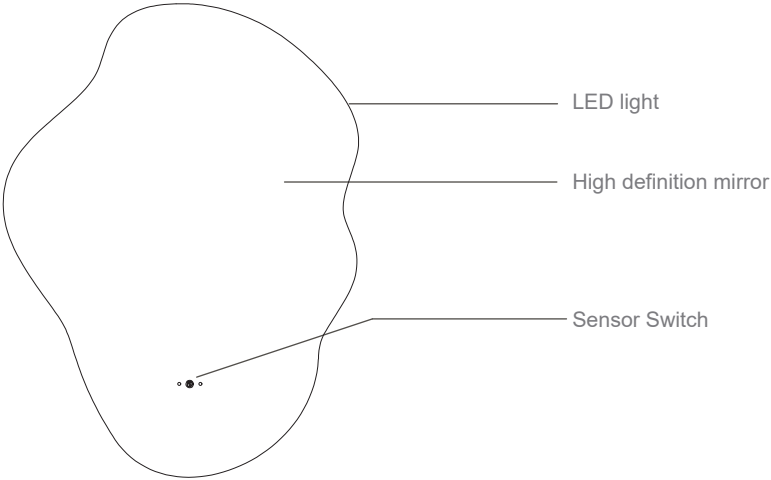

SPECIFICATIONS

- [Product Name] Wall-Mounted LED Bathroom Mirror
- [Material] Aluminum+Glass
- [LED Color Temperature] 2700K-6500K
- [Input Voltage] AC120V

SPECIAL FEATURE


-  High definition eco-friendly glass mirror
-  Free to switch between warm, natural and cool light
-  Built-in touch sensor switch
-  With anti-fog function
-  Built-in power plug

PACKING LIST


- | | | |
|---|---|---|
|  |  |  |
| LED Wall-mounted Bathroom Mirror | Screws 2 pcs
Wall plugs 2 pcs | Instruction Manual |

OPERATING INSTRUCTIONS

- (1) Shorten wave the switch light and Anti-fog.
- (2) Wave your hand to turn on the light and defogging, and wave again within 3 seconds to switch the color temperature (cold light--> warm light--> neutral light--> cycle). After the last wave, if you wave again after 3 seconds, the light and defogging will be turned off directly.
- (3) Keep the light on and stop moving (equivalent to long press button) for infinitely dimming, and the switch will flash when it is the brightest or darkest. Switch the color temperature within 3 seconds after releasing the hand.

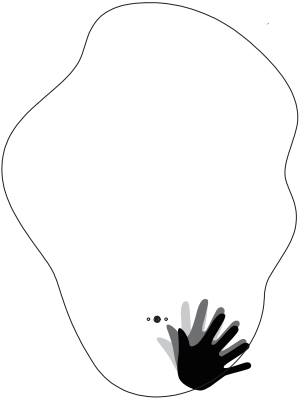

INSTALLATION METHOD

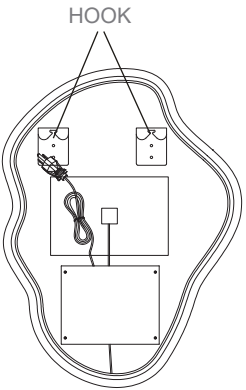

- ① Prepare tape measure,electric drill,hammer, screwdriver, pliers.
- ② Determine the appropriate height on a solid wall and draw two punctuations .
- ③ Drill holes in the punctuation, the depth of the hole is 3cm, knock the rubber plug into the hole, and then screw the screw, the screw is 2cm above the wall.
- ④ Pick up the product with both hands and hang it with the hook on the back of the product.