

# St. Leo

---

## APPLICATION GUIDE: MARBLE PAINT

PAGE 1 / 3



CONTACT:  
+45 53740622  
INFO@STLEOINTERIORS.COM  
STLEOINTERIORS.COM

EST. 2019  
PAINT + PLASTER

TEXTURES/  
FINISHES


Thanks to its forgiving consistency, Marble Paint offers the freedom to experiment with an almost endless variation of surface expressions. The use of different paint brushes, rollers, sponges, and trowels will result in unique appearances. The tactile nature of the product can be enhanced through short or long strokes, by layering the strokes or by varying their direction. St. Leo has also developed two techniques which can easily be applied with the most common equipment.

APPLICATION:

Surfaces must be clean, dry, smooth and not transmit any loose particles. Prime untreated plaster, concrete and common construction boards before painting. Wash and degrease previously painted surfaces before painting. For best results apply 1-2 coats of primer before applying 2 coats of Marble Paint. Stir paint thoroughly before use.  
Surface Dry: 3 hours with 50% RH at 23C.  
Ready to Repaint: 6 hours with 50% RH at 23C.

SHADOW  
FINISH

The Shadow finish is achieved by using a soft, 50-100mm paint brush to apply the Marble Paint in short expressive and multi-directional strokes. The Shadow finish creates a tonal surface that expresses the depth of the colour as the light falls across the subtly varied surface. For larger surface areas, the Shadow finish can be achieved by applying Marble Paint with a wide paint roller, then using a brush to finish the area whilst it is still wet.

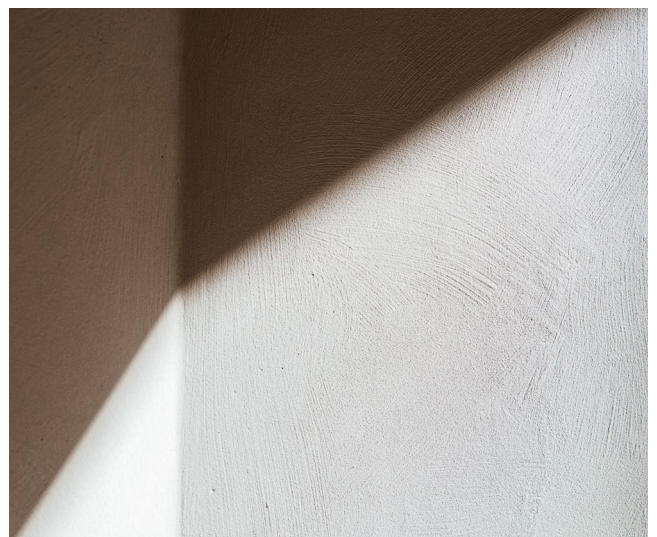

CANVAS  
FINISH

The Canvas finish is made by using a wide paint roller to apply the Marble Paint in long strokes across the surface. This technique imparts a naturally dappled effect that gives textural depth when viewed up close, while the entire surface appears more uniformly structured from afar.



COVERAGE:

Approximately 4 – 6 M2 / Litre (1 Layer)

Package: 10L buckets

STORAGE &  
WASTE:

Always store in original packaging. Containers that have been opened must be carefully resealed and kept upright to prevent leakage.

Storage temperature: Frost free.

All paint residues and containers must be deposited at your local waste collection point.

SHARE

Share your St. Leo project on Instagram with [#stleointeriors](#) and follow [@stleointeriors](#) for more inspiration. We welcome images and videos of your projects as well as any feedback or questions. Please feel free to contact us at: [info@stleointeriors.com](mailto:info@stleointeriors.com).