


Over-the-Top trunk rack

Installation on vehicle with roof rack cross bars or raised rails

upper straps with quick connect hooks

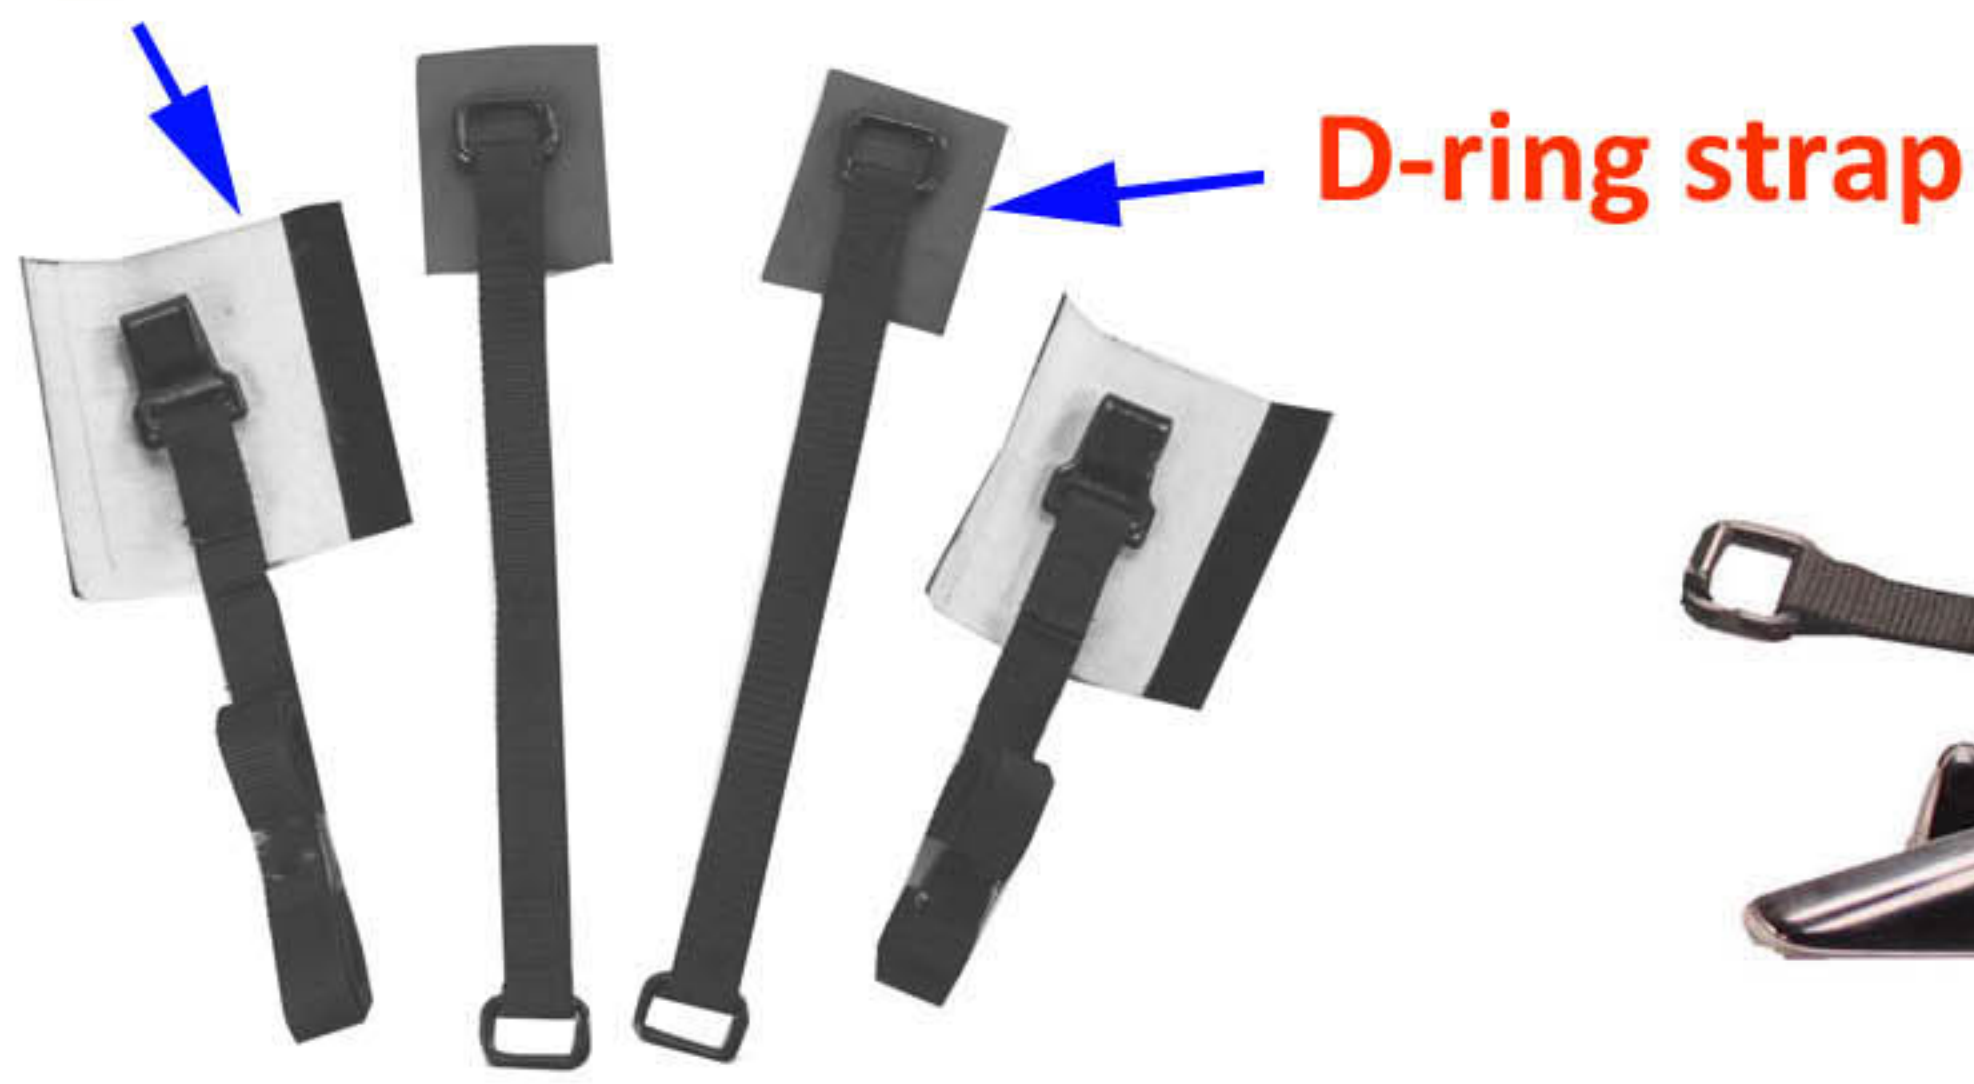

raised rails

cross bar



Wrap the D-ring strap around the cross bar or raised rail as shown above. Be sure canvas pad is between the strap and cross bar or rail.


Mount the rack onto the bumper, adjust the clearance frame so it is positioned above the spoiler. Attach the side straps so the rack is self-standing.



Replace upper straps on rack with quick connect straps. Hooks should be facing up



Tighten strap, then fold the pad over hook/D-ring. Seal using Velcro on pad.

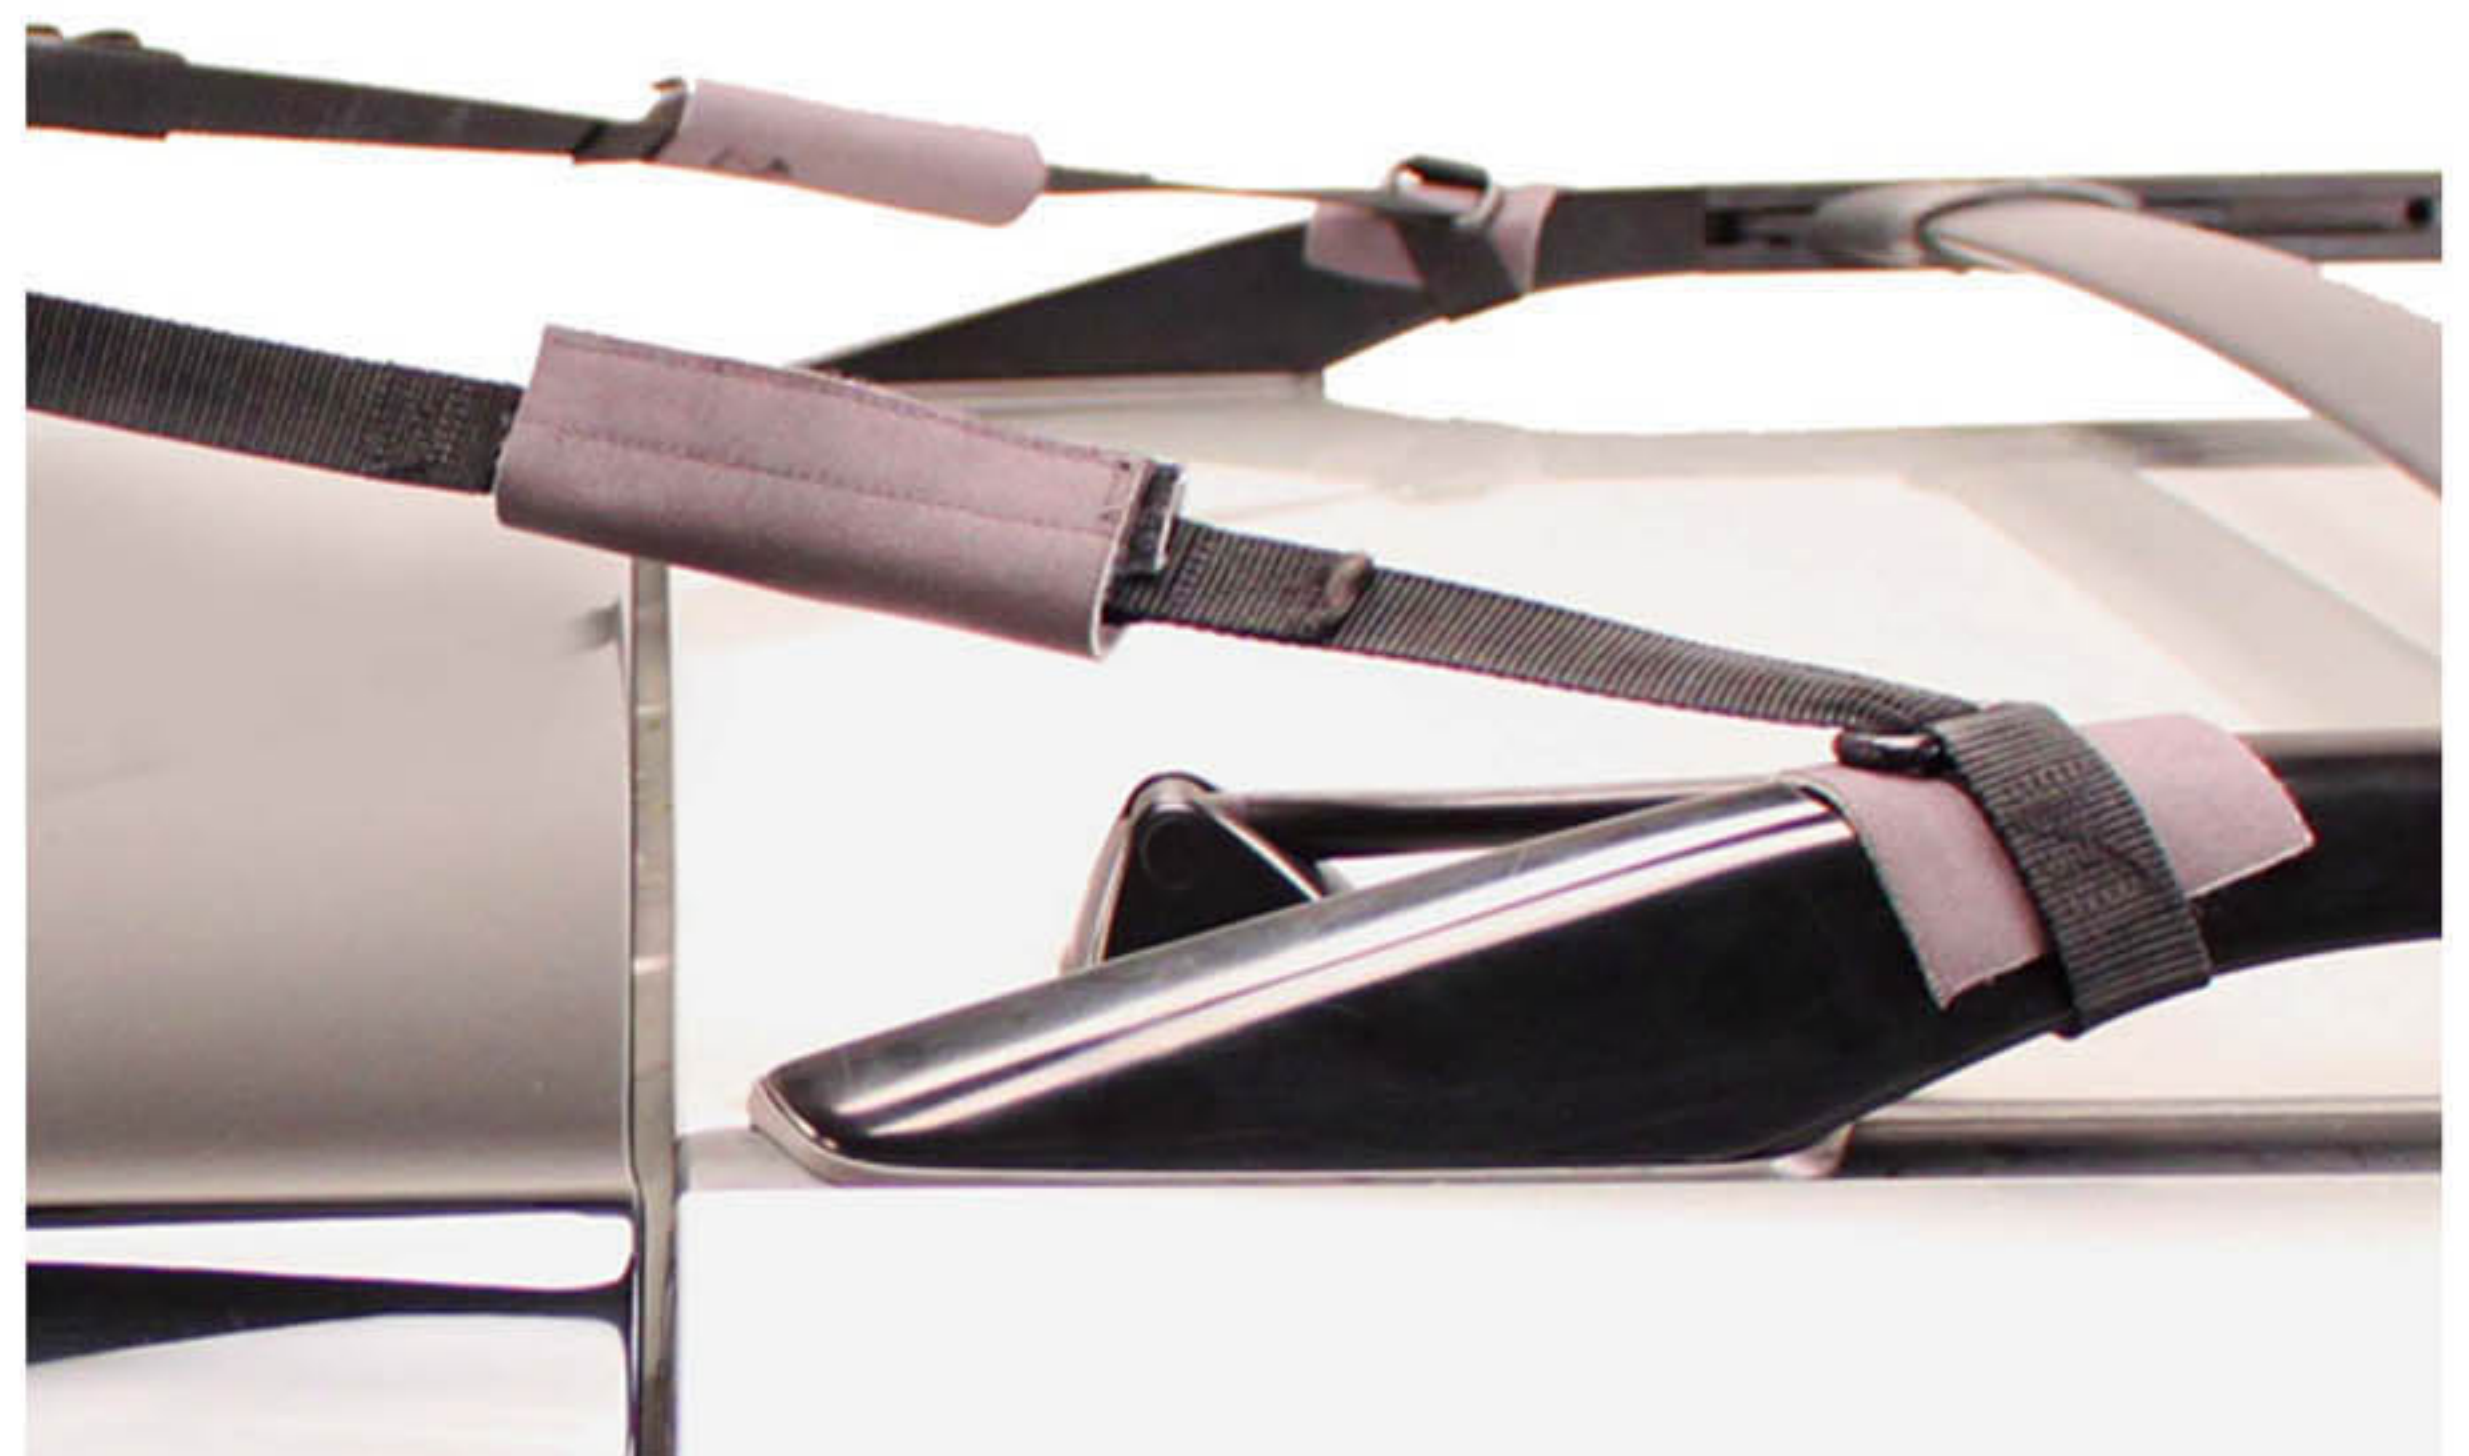

Tighten all straps securely
Upper straps should be well above spoiler!



Ready