

# HR | HOLLYWOOD RACKS

## RV Rider Hitch Extender


Step 1: Insert Hitch Extender your vehicles 2" receiver hitch. Note that the welded nut and bolt are on the top side of the hitch extender. Use the U-Bolt Hitch tightener to tighten the extender to your vehicle.



Step 2: Place the lock washer and then the flat washer onto the 1/2x13 threaded hitch pin. Insert the bolt through the hole in your receiver tube and the extender. Tighten securely with a wrench and install the R clip.



Step 3: Insert the bike racks hitch tube into the hitch extender. Align the pin holes on the rack with the holes on the hitch extender.

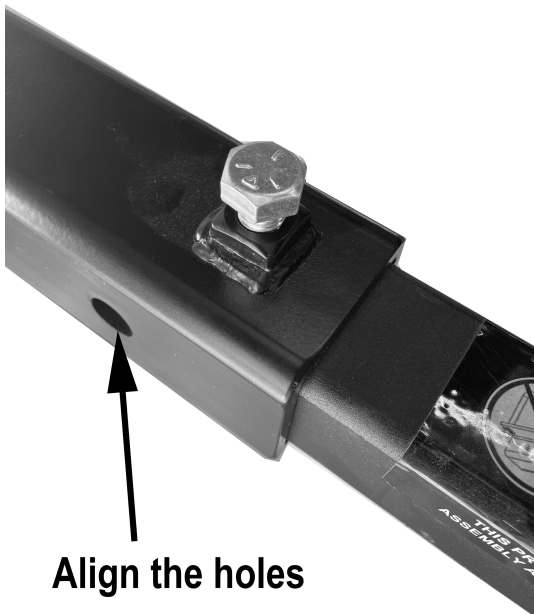

Step 4: Place the lock washer and then the flat washer onto the 1/2x13 threaded hitch pin. Insert it through the hole in the hitch extender and the rack. Tighten securely with a wrench. Next tighten the bolt on the top of the extender securely with a wrench. This will eliminate the play between the extender and the rack.

