


HITCH CLAMP

Coupling Tightener / Anti-Rattle Hitch Accessory



2.5"
Cross Clamp
PN: TI-HC-CC2.5

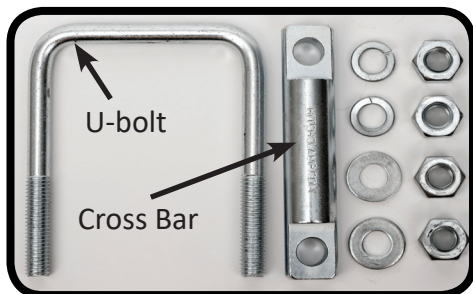

Instructions

TOOLS NEEDED: Adjustable wrench or 7/8" wrench

1.) Unpack the parts and verify you have the following items:

- 1 - U-bolt
- 1 - Cross Bar
- 2 - Flat washers
- 2 - Lock washers
- 4 - Hex nuts

2.) Hook the bottom of the u-bolt on the back side of the receiver flange.

3.) Slide the cross bar over the threads of the u-bolt.

4.) Install a flat washer on each side of the u-bolt.

5.) Thread a nut on each side of the u-bolt and tighten each side finger tight.

6.) Tighten both nuts one turn at a time switching between the nuts so there is equal pressure on each side.

7.) Once each side is tight, add the lock washers on each side and then the lock nuts. Tighten both nuts to compress the lock washers.

8.) The Hitch Clamp can be installed with the cross bar on the top or bottom of the receiver.

Have fun and enjoy your next adventure!

Installation video: <https://www.hitchclamp.com/pages/videos>

Use this product at YOUR OWN RISK. The seller and manufacturer as well as the distributor of this product will not be held liable under any circumstances for the incidental or consequential damage or injury, due indirectly or directly to the use of this product.

For optimal safety and performance, proper installation and proper use of this product must be followed. We, Tiger Industrial Inc. (dba HitchClamp) do not accept responsibility for alterations, improper use and installation of any product purchased from us. Use with caution and at your own risk.

Be safe and have fun!

Enjoy a quality American made product!

Thank you for your purchase!



Scan or browse to www.HitchClamp.com
HitchClamp: a Tiger Industrial Inc. Brand

