

INSTALLATION INSTRUCTIONS FOR HOLLYWOOD TRAILER HITCH RACK MODEL HR120 "TOW "n GO"

- CLASS III RECEIVER HITCH REQUIRED IF YOU TOW AND CARRY BIKES AT THE SAME TIME!
- LONGER HITCH BALL MOUNT MAY BE REQUIRED FOR USE OF THIS PRODUCT. (THIS PRODUCT REQUIRES 3" OF SPACE ON YOUR HITCH BALL MOUNT)

Parts List for HR120

ID	Qty	Description
B	1	Cross Tube
C	1	Upright Tube
E	1	Base Unit, with following parts:
D	1	Snapper Pin
	3	Set screws for base unit

IN PARTS POLYBAG:

A	2	Plastic Coated Support Arms
	2	1/2-20 nuts & washers
	2	3/8-16 x 2" bolts
	2	3/8-16 nuts & washers (4 ea)
	1	Hex key for set screw in base unit
	1	Tie down strap


Assembly Procedure

Tools Required: TWO 1" capacity adjustable wrenches

1. Insert support arms (A) through cross tube (B). Install 1/2" nuts & washers, tighten nuts securely.
2. Place cross tube (B) on top of upright (C). Install the 3/8-16 x 2" bolt through a washer, then through the cross tube and through the plate on the upright tube. Install and secure a washer and 3/8 -16 nut on the bolt end. Repeat for the other side. Tighten both nuts securely.


Installation Procedure for HR120

1. Install your trailer hitch insert tube through the base unit **as far forward as possible**. Tighten both set screws with hex key.
2. Insert upright tube into base unit. This product has an adjustable height feature. If you are towing and carrying bikes at the same time, adjust the height of the rack AND the position of the bikes so that the wheels will not be damaged when backing up or turning at a sharp angle. Bikes can be hung at the down tube positions if necessary (lower tubes of the bike frame's three main tubes). Open snapper pin and insert through base unit and upright tube. Close snapper pin, tighten set screw on base unit.

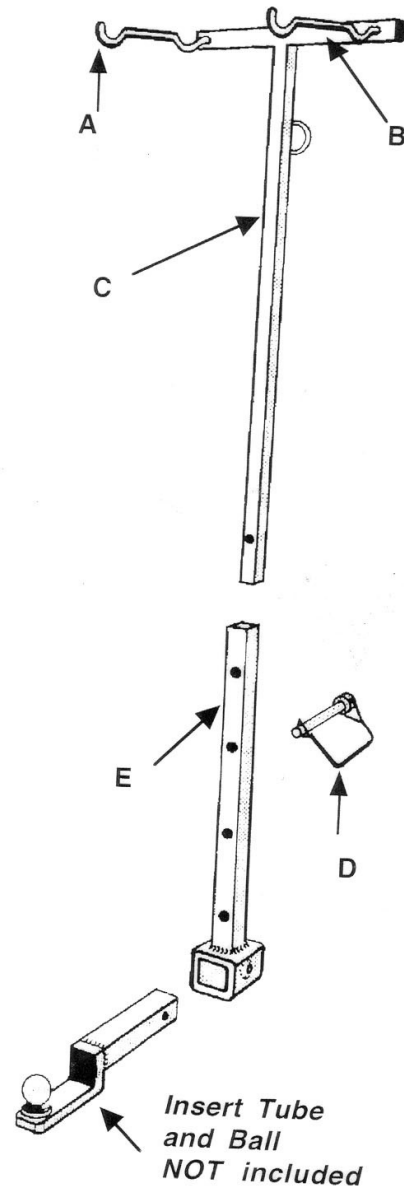

PLACING & LOCKING THE BIKES ON THE RACK: (MAX. CAPACITY 80 LBS OR 2 BIKES)

Load the heaviest bike first, chain rings out. Place the first bike in the support arm's cradles. Use either the bike's top tube or down/seat tubes. Install the second bike in the same manner, but with the handlebars on the opposite end. Secure the bikes with the long tie down strap included. Be sure that the strap wraps through both bikes and around the back of the upright tube. Use additional tiedown straps and/or shock cords as required. The wheels should never be closer than 15" to the exhaust pipe. To lock the bikes, use a security cable and padlock (not included) to wrap through the bikes and through the welded ring on the upright. The upright can be locked at the snapper pin hole, and with a lockable hitch pin.

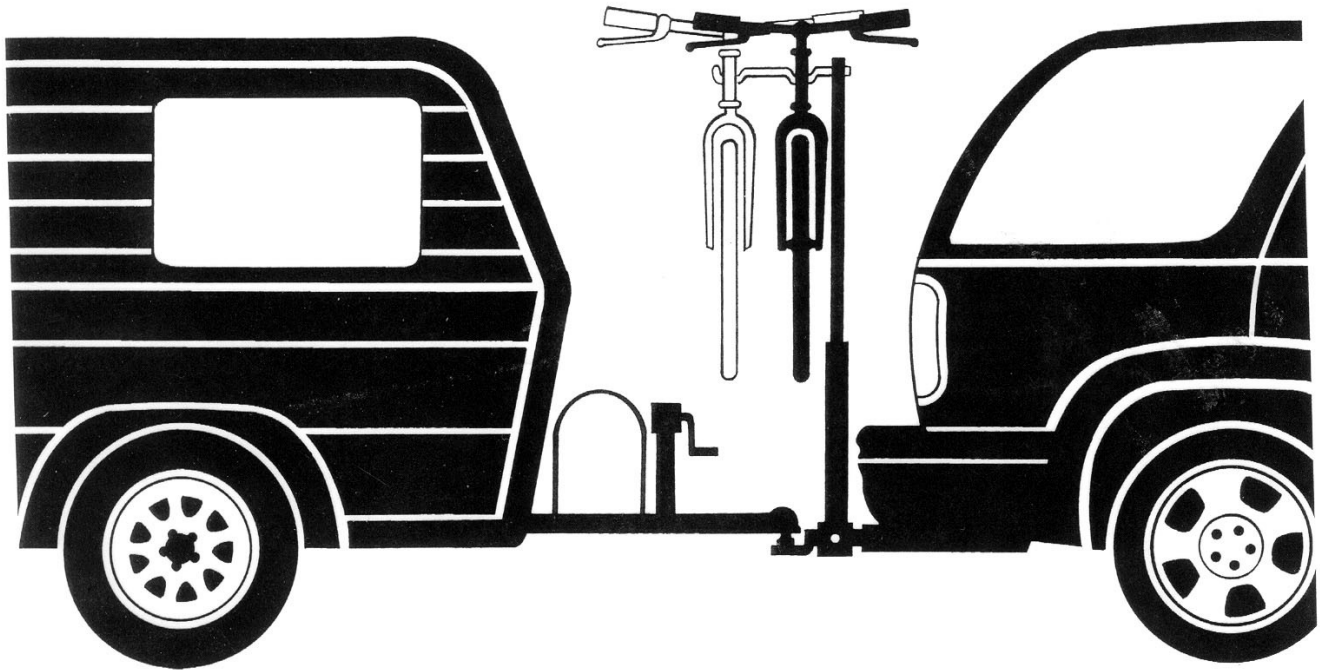

Install your trailer hitch insert tube through the base unit **as far forward as possible**. Tighten both set screws with hex key.

Limited One Year Warranty: This rack is warranted for a period of one year against defects in material and workmanship, effective from the date of purchase to the original purchaser. The manufacturer will repair or replace any defective parts due to materials or workmanship. The manufacturer of this product shall not extend the warranty to 1) any failure or malfunction of the product do to any of or modifications to the product; or 2) damages not attributable to a defect in materials or workmanship; or 3) Damages resulting from improper installation on vehicle or attachment of bicycles on rack. **Consequential or Incidental Damages:** The manufacturer shall not be liable for any consequential or incidental damages in connection with the purchase, use or handling of this bike rack. **Purchaser's Rights:** Some states do not allow the exclusion or limitation of consequential or incidental damages, and the above limitation may not apply to you. This warranty gives you specific legal rights, and you have other rights which vary from state to state.

Hollywood Engineering Inc. PO BOX 627. Gardena, CA 90248
(310)516-8600 Fax (310)516-8955 Made in USA