



BOW 6632 LH



32 | 24 | 20 | 20 | - 10 | -

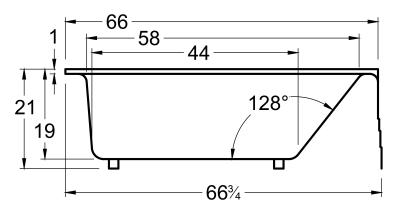



DIMENSIONS

66 x 32 x 21 deep (1676 x 813 x 533 mm) Whirlpool Operating Gallons = 36 (Liters = 136) Gallon to Overflow = 62 (Liters = 235) Weight of Bathtub = 95 lbs (43 kg)

MATERIAL

Acrylic

TUB FLOOR

Non-Textured

UNDERMOUNT: NO

This tub is not designed for undermount installation.

APPROVALS & COMPLIANCE





Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- ANSI Z124.1 ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

STANDARD EQUIPMENT

• Adjustable leveling feet

OPTIONAL ACCESSORIES

- Color Upcharge
- Matte White Acrylic Upgrade
- ANEX (Americh Nanobubble Experience)
- Chromatherapy *
- Drop-in Drain Kit
- Grab Bars: 9" or 14" * or 16"
- High Density Insulation *
- Linear Overflow w/Toe Touch Drain
- Pillows: 12" *
- Serenity Soak (tub only)
- Thermal Comfort System (TCS can not be used with VSM)
- Trim Plate for Linear Overflow
- Waste & Overflows Upgrades
 - Cable Drive Waste & Overflow *
- PVC Waste & Overflow +