

INSTALLATION GUIDE

TOILET BIDET SPRAY

IMPORTANT:

- Thoroughly inspect all parts for defects or damage prior to installation. Warranty claims will be void if product is installed with pre-existing defects.
- Ensure that installation of this product is in accordance with local, state and national building codes and regulations. Check these regulations before attempting any DIY work (should be installed by licensed plumber in accordance with AS/NZS 3500).
- Ensure the hose is not stretched, kinked or subject to abrasion. Do not expose the hose to naked flames or corrosive agents of any kind.
- This product is not recommended for continuous pressure applications and **MUST** be installed with a backflow preventer and an isolation valve that allows the water supply to be turned off when not in use. Note, if isolation valve is not installed, warranty will be void.
- The included fixings are suitable for solid walls only. It is the installer's responsibility to ensure the correct fixings are used to suit the wall type.
- The water supplied to this product must be potable (drinking) water. Rain water, grey water, or recycled water must not be used as doing so may cause skin irritation or infection.
- It is not recommended for the hand piece and hose to be under continuous pressure. The valve should be turned off when not in use.
- Connect the product to cold water supply pipe carrying potable water. Do not connect to an industrial water supply line that does not carry water of drinking quality as this will negatively affect hygiene and performance.




INSTALLATION:

1. Turn off the water going to the toilet tank by turning the shutoff valve all the way to the off position.
2. Empty the toilet tank by simply flushing the toilet.
3. Unscrew the water line from the base of your toilet tank. Before you do this, we recommend having a bucket and a rag nearby just in case a little bit of water does leak out.
4. Attach our T-Valve against the base of your toilet tank.
5. Connect the tank water line hose to the bottom of the T-valve.
6. Attach our Sprayer Hose on the side of the T-valve. The other end of the hose will screw into the bottom of the sprayer head.
7. The sprayer holder can be mounted to the wall or hooked on the edge of the toilet tank. Most people choose to hook it onto the edge of the tank, then put the lid back down.
8. Hand-tighten everything and turn your toilet tank water back on.
9. Check for any leaks in the hose or in the connections. If everything looks good, continue compressing the sprayer trigger until the sprayer is completely open and water is spraying out.
10. That's it! If your handheld bidet is not leaking and it is ready to be used.

Installation method 1



Installation method 2

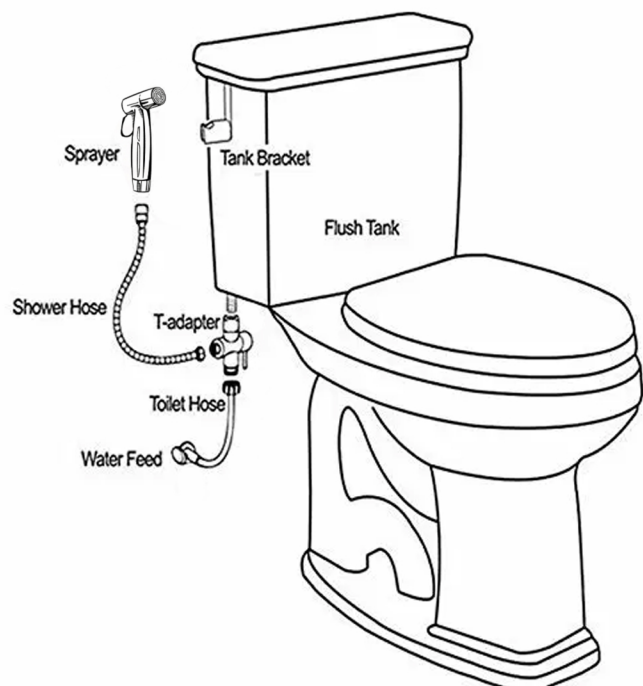



OPERATION:

NOTE: Water will always be on to the toilet tank for all positions of the T-valve Adapter Lever.


1. When the lever is at the LEFT position (by turning the lever CLOCKWISE), water is shut off to the Bidet Spray.
2. When the lever is at the DOWN position and water tank is filled with water, maximum water pressure will flow to the Bidet Sprayer.
3. To control the water pressure, adjust the lever at the T-valve between the LEFT (off) and DOWN (max. pressure) positions.

DIMENSIONS & TOOLS:

Hose Length: 150cm
Spray Head: 3 x 6.6 x 11cm
Shower Holder: 5 x 5 x 3.5cm
T-Valve: 2.5 x 6 x 7cm
T-Valve Outlet: 1/2"



Phillips screwdriver



Wrench

PARTS INCLUDE:

1 x Spray Head
1 x 1.5m Hose
1 x Bidet Holder
1 x Tank Mounted Hanger
1 x T-Valve Adapter
2 x Spacers
1 x FREE Teflon tape
2 x Screws Set

CARE AND MAINTENANCE:

- Clean with a soft cloth and warm soapy water.
- Do not use harsh detergents, corrosive chemicals, or abrasive cleaners.
- The hose may become damaged if exposed to caustic or corrosive substances/environments during installation or cleaning - such damage will not be covered by warranty.
- Periodically inspect hose for any signs of damage. We recommend that the hose is replaced every 5 years.

OPERATING SPECIFICATIONS:

Pressure: min 150 kPa - max 500 kPa
Temperature: min 2°C - max 20°C
Not for use with hot water

WARNING: THIS HAND SPRAYER MUST BE INSTALLED WITH APPROPRIATE BACKFLOW PROTECTION CONFORMING TO THE REQUIREMENTS OF THE PLUMBING CODE OF AUSTRALIA.

⚠ WARNING ⚠ AFTER EACH USE, YOU MUST TURN THE T-VALVE OFF to stop the water supply to the Bidet Hose and Sprayer. All hand-held sprayers and hoses have seals and parts that can leak from rough handling, misuse, dropping the sprayer, or daily wear and tear. Failure to turn off after each use will weaken the internal components of the sprayer and hose, it may cause water damage or flooding. Manufacturer and/or seller is not responsible for any damages which may have been caused by failure to follow this warning or improper installation.
TO AVOID WATER DAMAGE TO YOUR HOME OR PROPERTY NEVER LEAVE THE HOSE AND SPRAYER UNDER PRESSURE WHEN NOT USING THE PRODUCT.

HOW TO OBTAIN REPLACEMENT PARTS:

To obtain parts, please contact "The True Blue" at thetruebluestore@gmail.com, with your order number as proof of purchase.

For any other questions and support please email thetruebluestore@gmail.com