


SÉRIE SEAT

SEAT 35

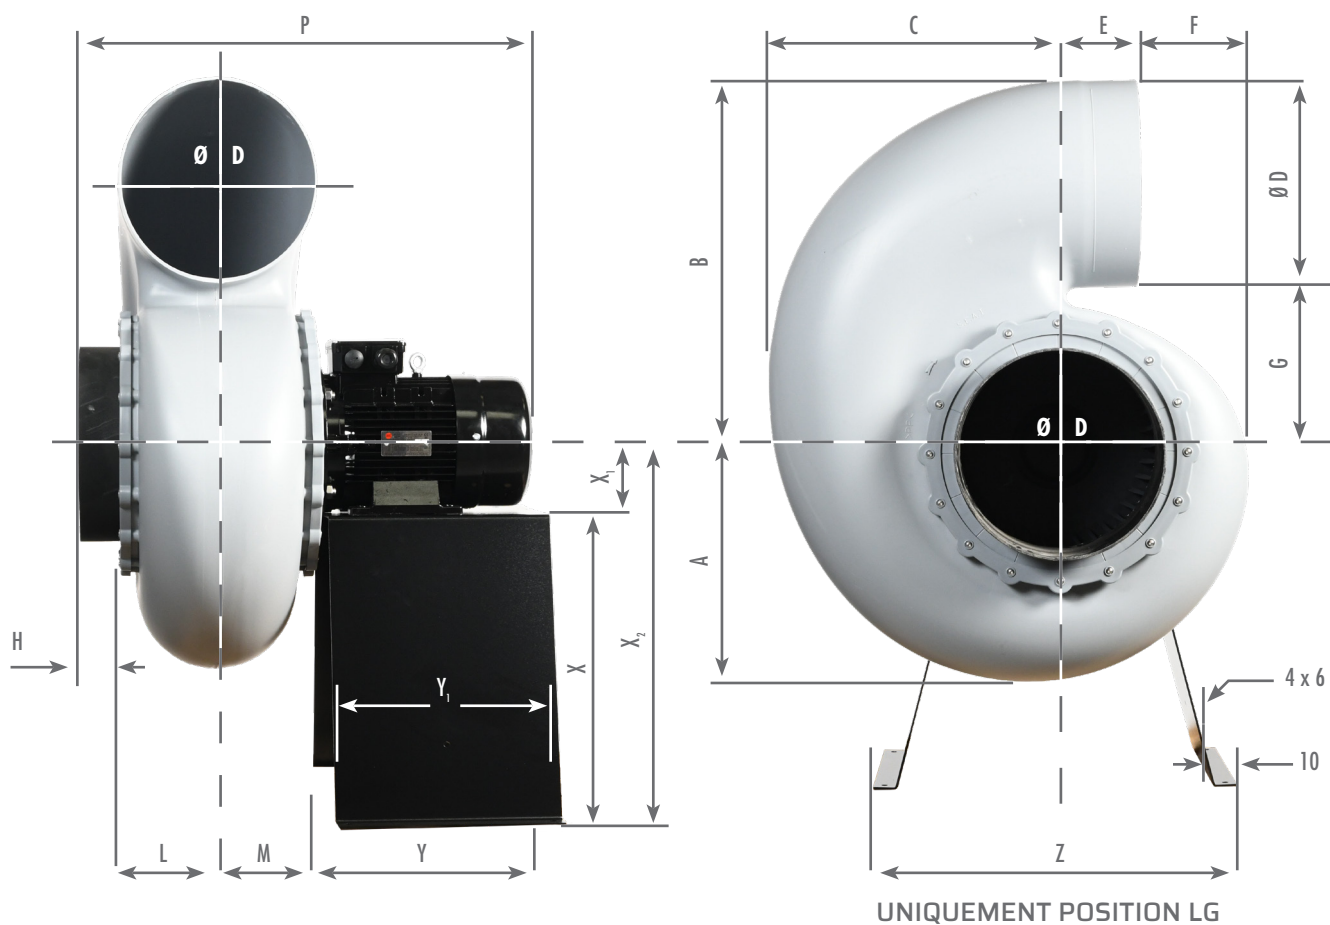

Disponible en  

Dimensions (mm) - Chaise métal non fournie (voir accessoires) Les hauteurs d'axe moteur peuvent changer selon le type de moteur utilisé																		
RPM	A	B	C	ØD	E	F	G	H	L	M	P	S	Y	Y ₁	Z	X	X ₁	X ₂
930	370	570	450	315	130	170	255	60	150	170	724	334	350	314	600	468	112	580
1450	370	570	450	315	130	170	255	60	150	170	792	402	350	314	600	468	112	580
1450 ATEX ou 7,5 kW	370	570	450	315	130	170	255	60	150	170	822	432	350	314	600	468	132	600

Rotation Gauche LG (sens anti-horaire)



LG 180



LG 225



LG 270



LG 315



LG 0



LG 45



LG 90




LG 135

NIVEAUX SONORES

dB Acoustique					Fréquence Octave (Hz)							
Vitesse (T/min)	Qv (m³/h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
930	3770	290	79	59	86	88	79	76	73	71	68	62
1450	5880	704	89	69	96	98	89	85	82	81	77	71

* Pression acoustique Lp à 3 mètres - Données acoustiques en sortie disponibles sur demande.

SÉRIE SEAT - SEAT 35

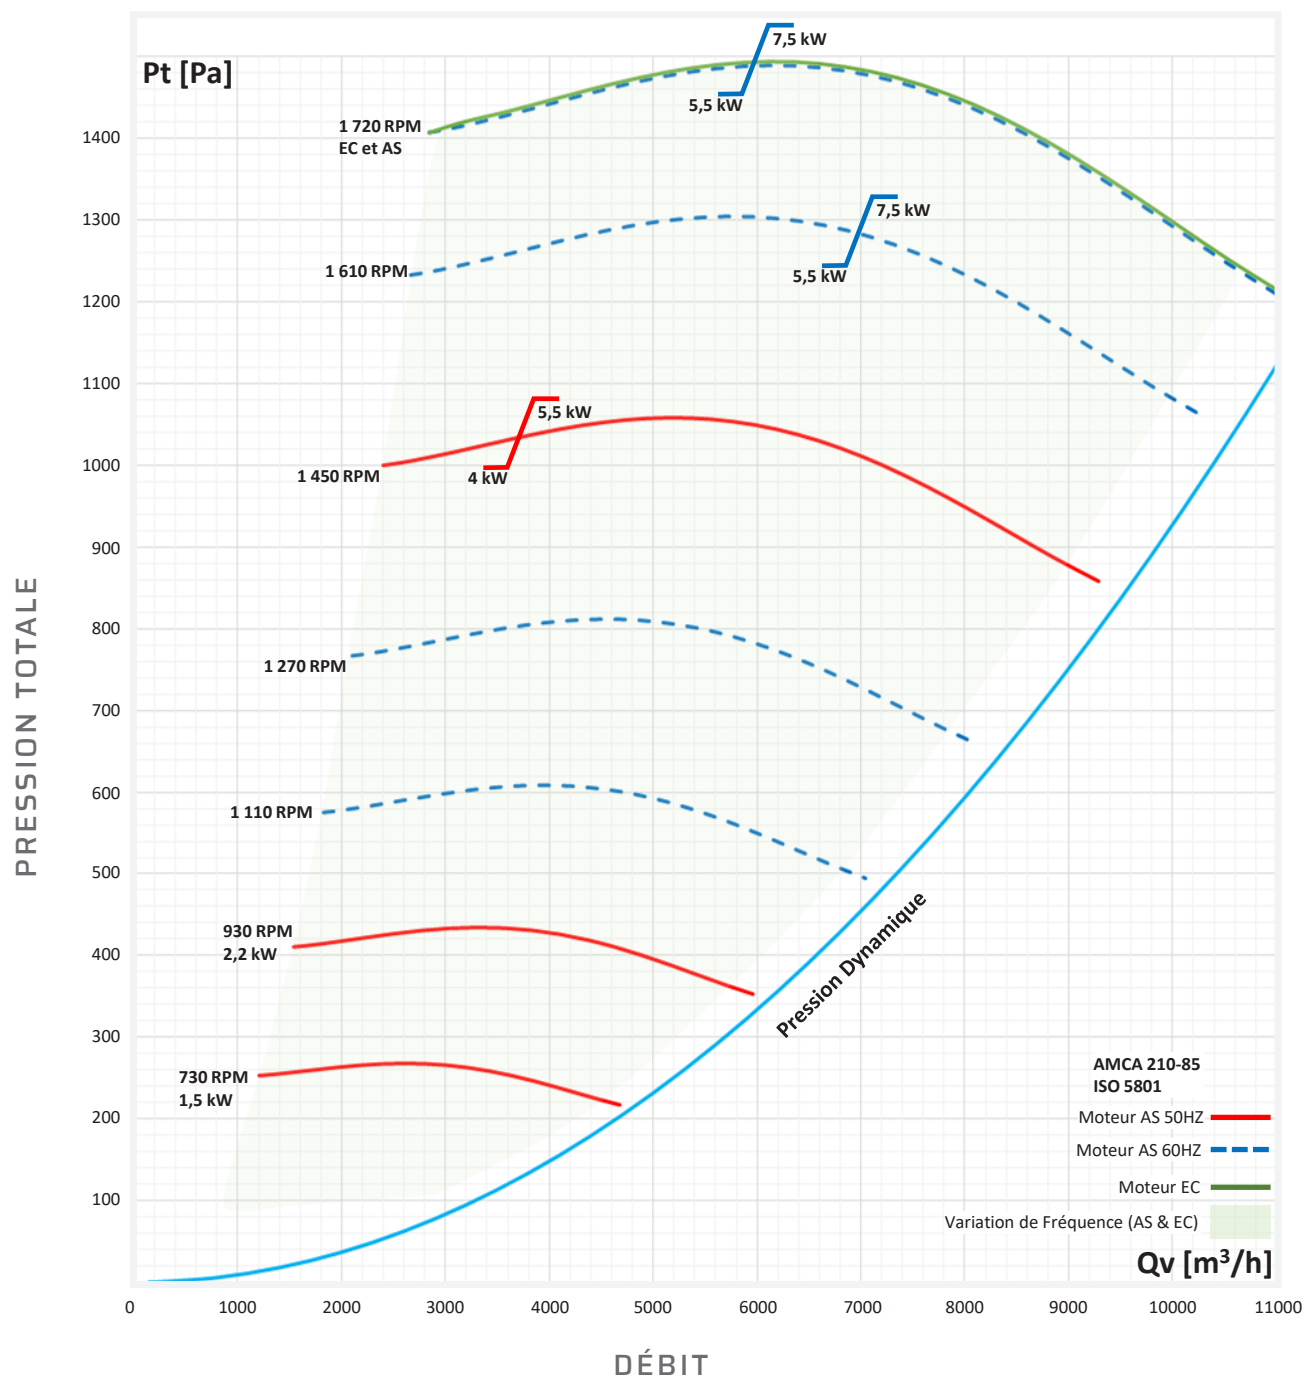

CARACTÉRISTIQUES ÉLECTRIQUES

Moteur	Puissance (kW)	Moteurs RPMs (RPM)	Voltage (V)	Intensité (A)	Poids (kg)	Référence
IP55 Asynchrone Triphasé	1,5	730	230/400	7,45/4,3	21,2	51350000
	2,2	930	230/400	8,85/5,09	47,7	51351000
	4	1450	230/400	13,8/7,95	50,2	51352400
	5,5	1450	400/690	10,7/6,19	62,2	51352000
	7,5	1450	400/690	14,3/8,23	70,4	51352001
IP66 EC Triphasé	4	1720	360/460	10	53	52352000
IP55 Asynchrone Triphasé ATEX 	2,2	930	230/400	9,7/5,6	45,1	51351003
	5,5	1450	400/690	11,5/6,6	66,6	51352003
	7,5	1450	400/690	15/8,68	70,2	51352004

Sonde PTC obligatoire pour moteur ATEX avec variateur