

Hele Box Solo - Make/Model/Year Fitment Test

These confirmed fitments were based on the make/model/years we had on hand to test. Certain vehicles will have more room for adjustability than others. Smaller vehicles might require a front seat to be moved forward in position in order to accommodate the full length of the frame. This list will continue to be updated as we test more makes/models. If your vehicle isn't on here, it's likely that we just haven't had an opportunity to test the fitment. Reach out to us through the contact us form to confirm virtually.

<u>Manufacturer</u>	<u>Model</u>	<u>Year</u>
Toyota	Rav4	2006 - 2024
Toyota	Landcruiser	1990 - 2007
Toyota	4Runner *	1990 - 2024
Toyota	Highlander	2001 - 2019
Subaru	Outback	2000 - 2024
Subaru	Forester	1997 - 2024
Subaru	Crosstrek	2024
Honda	CRV	2007 - 2011 2017- 2024
Honda	Element	2003 - 2006
Honda	Pilot	2016 - 2022
Jeep	Wrangler (4 Door)	2009 - 2024
Jeep	Grand Cherokee	2011 - 2022
Ford	Escape	2013 - 2024

*4runner owners read special instructions on last page.

Ford	Bronco (4 Door)	2021 - Present
Mazda	CX-5	2013 - 2016
Chevrolet	Trailblazer	2021 - 2024
VW	Toureg	2011 - 2017
VW	Tiguan	2018 - 2024
Volvo	XC60	2018 - 2024
Volvo	XC90	2015 - 2024
Land Rover	Defender 110	2019 - 2024
Pick-up Trucks	works w/ any 6ft bed or 5.5 bed with tailgate down	Toyota, Ford, Chevy, etc.
Vans	works w/ 6ft relatively flat surface	Toyota, Ford, Chevy, etc.

Side By Side Confirmed Fit List


Certain vehicles allow for 2 Hele Boxes to be placed side by side & accommodate 2 people. Here are the vehicles we've personally tested in this configuration.

To see if your vehicle is able to fit with this configuration - you'll need a trunk/bed width of at least 48" to accommodate the wooden toppers with a width on the floor between the wheel wells at a minimum of 43" to accommodate the frames

Toyota	4Runner	1996 - 2002 2010 - 2024
Toyota	Land Cruiser	1998 - 2007

4Runner Owners

All 4Runner makes/models/years have a set of rear seats that fold forward and steal valuable sleeping/storage room. One of these rear bottom seats will need to be removed. Removing takes less than 5 minutes, and only requires you to remove a plastic cover and 2 bolts. This is a common practice by 4Runners owners who sleep in their vehicle.

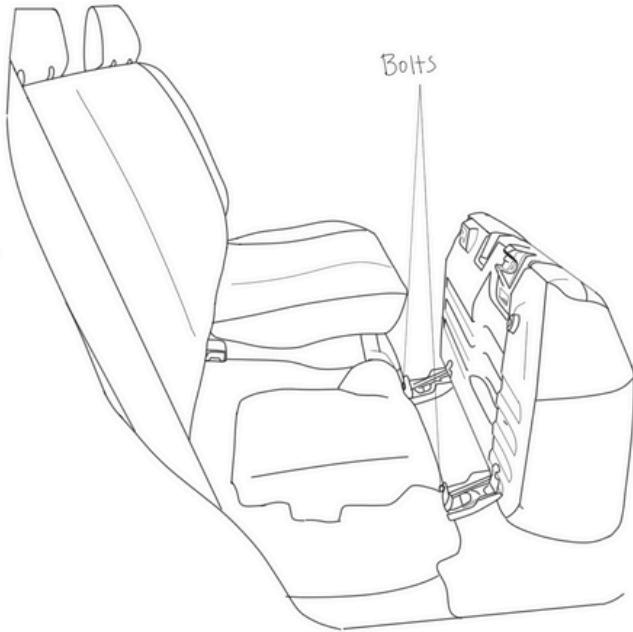

(1996-02) 12mm bolt | rear/bottom seat | passenger side
(2003-24) 14mm bolt | rear/bottom double-seat | depends on trim

[Watch this helpful video for an easy walkthrough](#)

1996-2002 4Runners Optional Configuration

4Runners from 96-02 (3rd gens) have 50/50 split rear seats. There's a special/optional configuration that allows access to one of these seats with the HeleBox in place. Remove the middle/right leg from its bracket, and rest the bracket directly on the wheel-well of the passenger side. Adjust other legs accordingly so the frame sits level.

We have not formally tested the strength of a 3rd gen's wheel-well. If you have concerns about it bearing weight, DO NOT use this method

[Here's a video walk through](#)