IMMERSION CIRCULATOR SMARTVIDE 4

Max. capacity: 28 lt./ 7 gal.





SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F.

4 user-friendly control buttons.

FEATURES AND BENEFITS

Portable precision cooker with stirrer for up to 28 lt. / 7 gal. containers. Deisgned for chefs, developed with chefs.

- √ The thick stainless steel, robust construction guarantees commercial performance. The front panel and the grip are made of fiberglass-reinforced polyamide.
- √ SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- √ Allows cooking food in their own juice and using this juice immediately after cooking to enhance flavors.
- √ Marinates and macerates an ingredient in half the
- ✓ Infuses and flavors oil, fat or other products applying the controlled temperature technique.
- ✓ Increses profits due to lack of product shrink.
- √ Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. 4 buttons and a full-color TFT display that offers all the information at a glance makes operation a child's play.
- √ SmartVide4 is portable: thanks to their ergonomic handle, SmartVide4 can be taken from a container to another easily. Additionally, the optional bag allows easy transport - wherever the Chef goes.


Accessories

- ☐ Insulated tank for SmartVide immersion circulator
- Lid for SmartVide
- ☐ Floating balls for SmartVide
- SmartVide transport bag
- □ Lid 1/1 GN 1/1 SmartVide 4













Project	Date
Item	Qty

Approved

FOOD PRESERVATION AND SOUS-VID

IMMERSION CIRCULATOR SMARTVIDE 4

Max. capacity: 28 lt./ 7 gal.

SPECIFICATIONS

Temperature

Display precision: 0.01 °C

Range: 5 °C - 95 °C

Permissible ambient temperature: 5 °C - 40 $^{\circ}$ C

Time

Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 28 I

Total loading: 1600 W


Submergible part dimensions: 116 mm x 94

mm x 147 mm

External dimensions (WxDxH): 116 mm x

128 mm x 330 mm

Net weight: 3.1 Kg

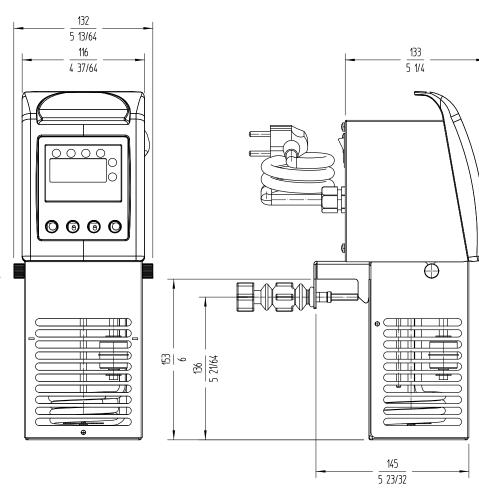

AVAILABLE MODELS

1180040 SmartVide4 230/50-60/1

1180042 SmartVide4 120/50-60/1

1180043 SmartVide4 230/50-60/1 UK

* Ask for special versions availability



Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved