


DO NOT RETURN

Contact manufacturer for any product issues.

usw.sales@escaladesports.com - toll free at **1-877-201-9748**.

Parts List:

Steel Stanchion (QuikSecure)



Base (2)



Post (2)



No Tools Required

Assembly Instructions

1. Insert the post into the base by aligning the cross pin at the bottom of the post to the cross cutout in the base.

Once aligned, push post down completely and rotate post $\frac{1}{8}$ of a turn to lock post/cross pin in place. See Figure A.

2. Once post is assembled to base, stanchion can be positioned for use.

3. To remove post, push post down completely and rotate post $\frac{1}{8}$ of a turn. Lift post from base.




↓
Push
Post
Down
Completely

Important!


↻ Rotate
 $\frac{1}{8}$ Turn

A

Bottom View of Base
Cross pin shown locked in place.

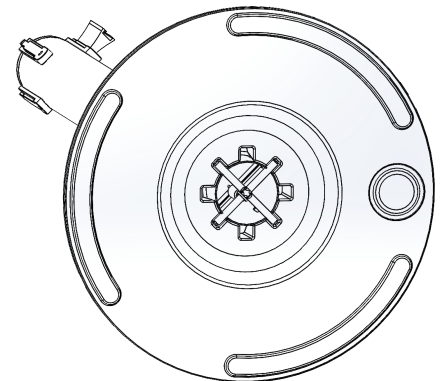

WRONG!

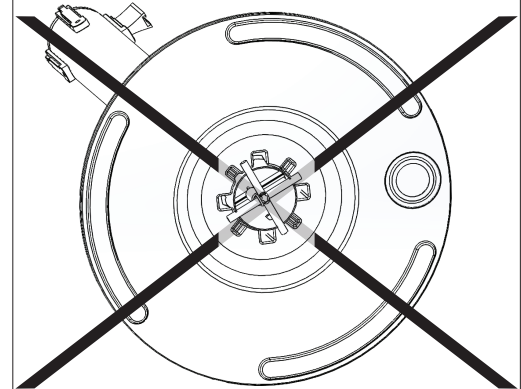

Removal of Belt

